
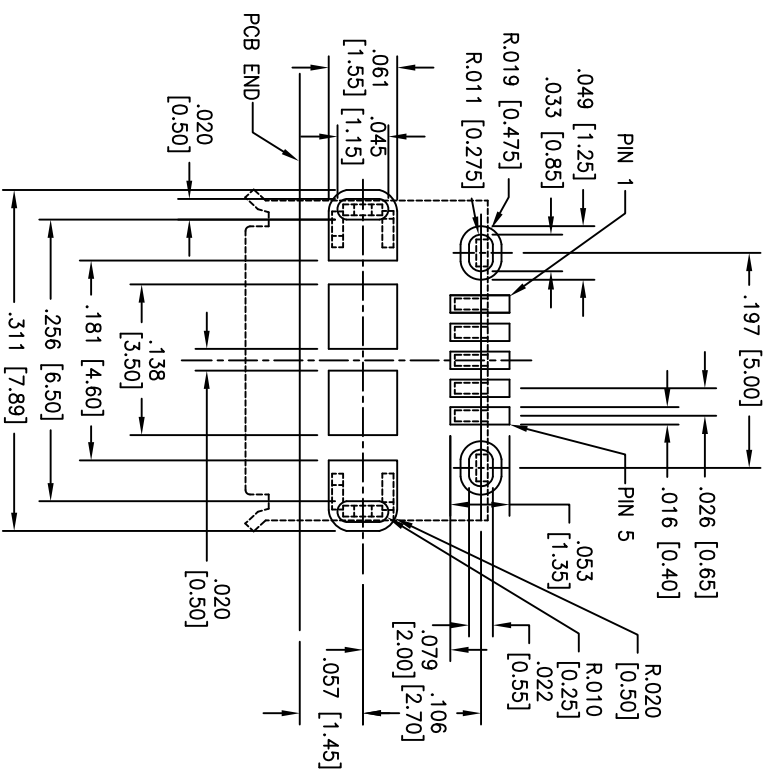
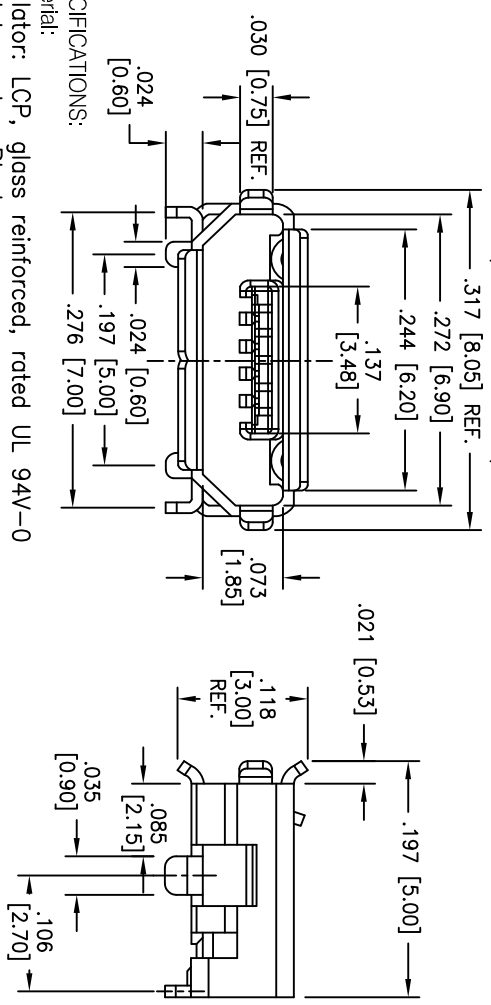


Rev	AWO #	Description	Date	Appr
-		RELEASED	4/21/11	

APPROVED: _____
 DATE: _____ TITLE: _____



SPECIFICATIONS:

Material:
 Insulator: LCP, glass reinforced, rated UL 94V-0
 Insulator color: Black

Contacts: Brass
 Shell: Brass, Matte Tin plated.

Plating:
 Gold Flash over Nickel overall

Electrical:
 Operating voltage: 30 VAC max.
 Current rating: 1 Amp max.

Operating resistance: 30 mohms max.
Insulation resistance: 1000 Mohms min. @ 100 VDC
Dielectric withstanding voltage: 1000 VAC for 1 minute

Temperature Rating:
 Operating temperature: -20°C to +85°C

Packaging:
 Supplied on Tape & Reel
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 MICRO USB, TYPE B, SINGLE PORT
 FEMALE, DIP SHELL, SMT TYPE, TAPE & REEL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		Holes		DATE	
X	± .10	ØXX	± .10		
.XX	± .020	ØXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	DY	4/21/11			
CHECKED					
APPROVED					
SIZE	PART NO.	TITLE			
X	MCR-B-S-RA-SMT-CS1-T/R	MICRO USB, TYPE B, SINGLE PORT			
REF: S00005C	SCALE: NTS	SHEET 1 OF 1			