MMDT2222V

DUAL NPN SMALL SIGNAL SURFACE MOUNT TRANSISTOR


ADVANCE INFORMATION

Features

- Epitaxial Planar Die Construction
- Complementary PNP Type Available (MMDT2907V)
- Ultra-Small Surface Mount Package
- **Lead Free By Design/RoHS Compliant (Note 1)**
- **"Green" Device (Note 2)**

Mechanical Data

- Case: SOT-563, Molded Plastic
- Case Material: Molded Plastic, “Green” Molding Compound. UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020C
- Terminal Connections: See Diagram
- Terminals: Finish — Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Marking & Type Code Information: See Last Page
- Ordering Information: See Last Page
- Weight: 0.003 grams (approx.)

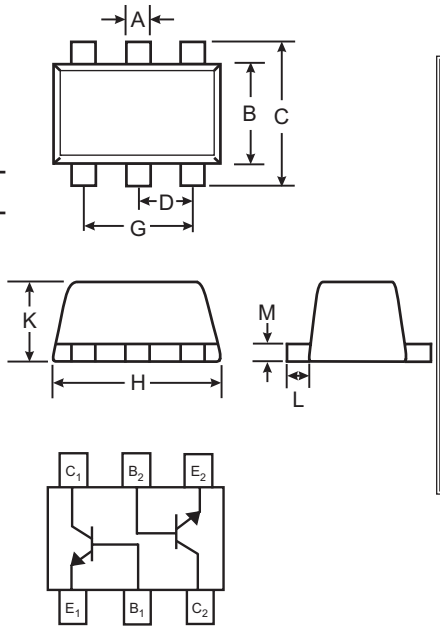

SOT-563			
Dim	**Min**	**Max**	**Typ**
A	0.15	0.30	0.25
B	1.10	1.25	1.20
C	1.55	1.70	1.60
D		0.50	
G	0.90	1.10	1.00
H	1.50	1.70	1.60
K	0.56	0.60	0.60
L	0.10	0.30	0.20
M	0.10	0.18	0.11
All Dimensions in mm			

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Collector-Base Voltage	V_{CBO}	75	V
Collector-Emitter Voltage	V_{CEO}	40	V
Emitter-Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous (Note 3)	I_C	600	mA
Operating and Storage and Temperature Range	T_j, T_{STG}	-55 to +150	°C

Thermal Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 3)	P_d	150	mW
Thermal Resistance, Junction to Ambient (Note 3)	$R_{\theta JA}$	833	°C/W

Notes:
1. No purposefully added lead.
2. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
3. Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch; pad layout as shown on Diodes Inc. suggested pad layout document AP02001, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.

© Diodes Incorporated

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
OFF CHARACTERISTICS (Note 4)					
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	75	—	V	I_C = 10μA, I_E = 0
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	40	—	V	I_C = 10mA, I_B = 0
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	6.0	—	V	I_E = 10μA, I_C = 0
Collector Cutoff Current	I_{CBO}	—	10	nA μA	V_{CB} = 60V, I_E = 0 V_{CB} = 60V, I_E = 0, T_A = 150°C
Collector Cutoff Current	I_{CEX}	—	10	nA	V_{CE} = 60V, $V_{EB(OFF)}$ = 3.0V
Emitter Cutoff Current	I_{EBO}	—	10	nA	V_{EB} = 3.0V, I_C = 0
Base Cutoff Current	I_{BL}	—	20	nA	V_{CE} = 60V, $V_{EB(OFF)}$ = 3.0V
ON CHARACTERISTICS (Note 4)					
DC Current Gain	h_{FE}	35 50 75 100 40 50 35	— — — 300 — — —	—	I_C = 100μA, V_{CE} = 10V I_C = 1.0mA, V_{CE} = 10V I_C = 10mA, V_{CE} = 10V I_C = 150mA, V_{CE} = 10V I_C = 500mA, V_{CE} = 10V I_C = 10mA, V_{CE} = 10V, T_A = -55°C I_C = 150mA, V_{CE} = 1.0V
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	—	0.3 1.0	V	I_C = 150mA, I_B = 15mA I_C = 500mA, I_B = 50mA
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	0.6 —	1.2 2.0	V	I_C = 150mA, I_B = 15mA I_C = 500mA, I_B = 50mA
SMALL SIGNAL CHARACTERISTICS					
Output Capacitance	C_{obo}	—	8	pF	V_{CB} = 10V, f = 1.0MHz, I_E = 0
Input Capacitance	C_{ibo}	—	25	pF	V_{EB} = 0.5V, f = 1.0MHz, I_C = 0
Current Gain-Bandwidth Product	f_T	300	—	MHz	V_{CE} = 20V, I_C = 20mA, f = 100MHz
Noise Figure	NF	—	4.0	dB	V_{CE} = 10V, I_C = 100μA, R_S = 1.0kΩ, f = 1.0kHz
SWITCHING CHARACTERISTICS					
Delay Time	t_d	—	10	ns	V_{CC} = 30V, I_C = 150mA, $V_{BE(off)}$ = - 0.5V, I_{B1} = 15mA
Rise Time	t_r	—	25	ns	
Storage Time	t_s	—	225	ns	V_{CC} = 30V, I_C = 150mA, I_{B1} = I_{B2} = 15mA
Fall Time	t_f	—	60	ns	

Notes: 4. Short duration test pulse used to minimize self-heating effect.

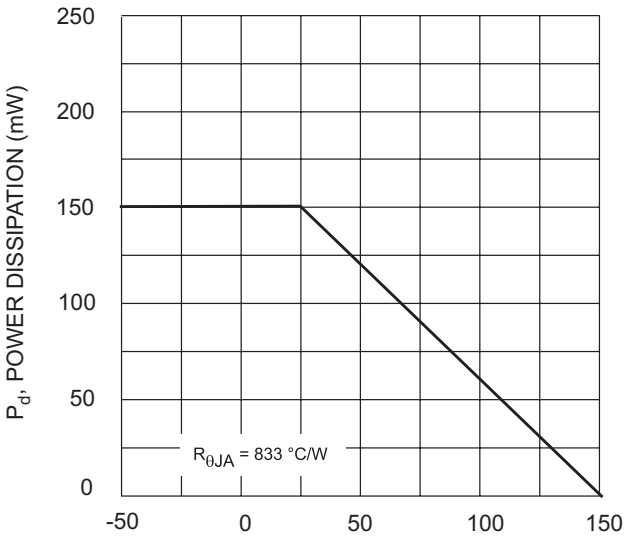


Fig. 1, Derating Curve - Total

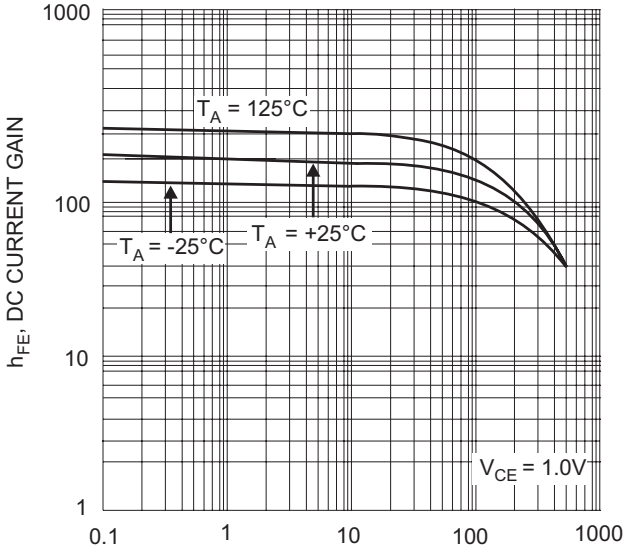


Fig. 2 Typical DC Current Gain vs Collector Current

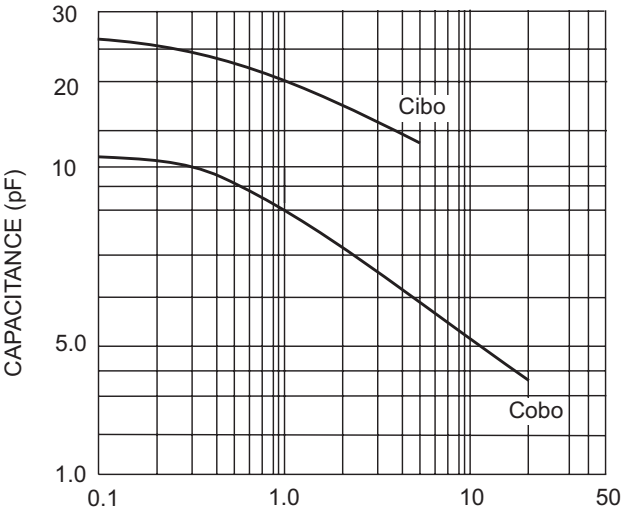


Fig. 3 Typical Capacitance

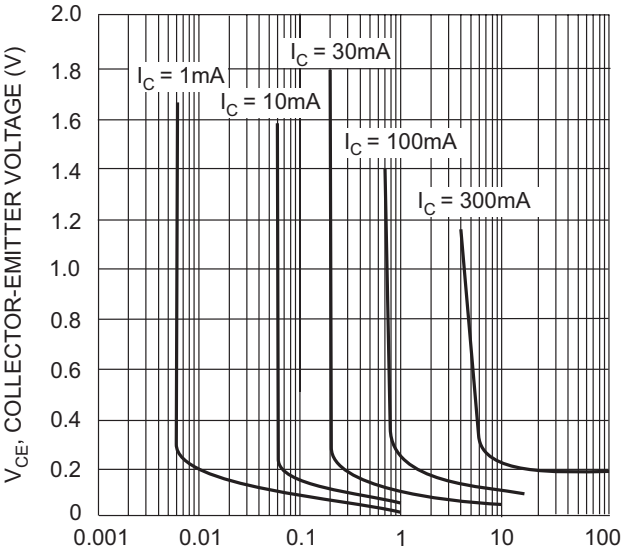


Fig. 4 Typical Collector Saturation Region

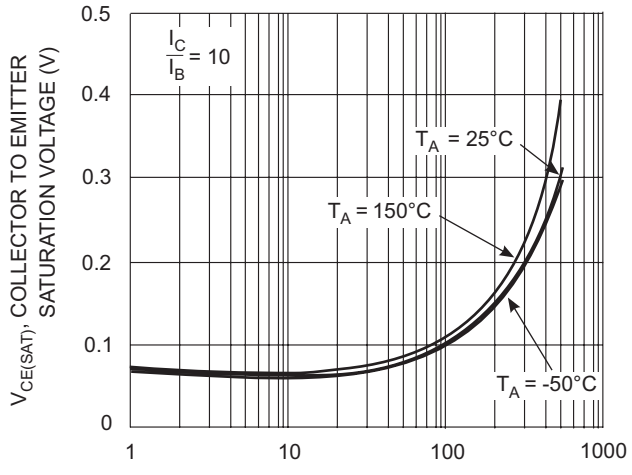


Fig. 5 Collector Emitter Saturation Voltage vs. Collector Current

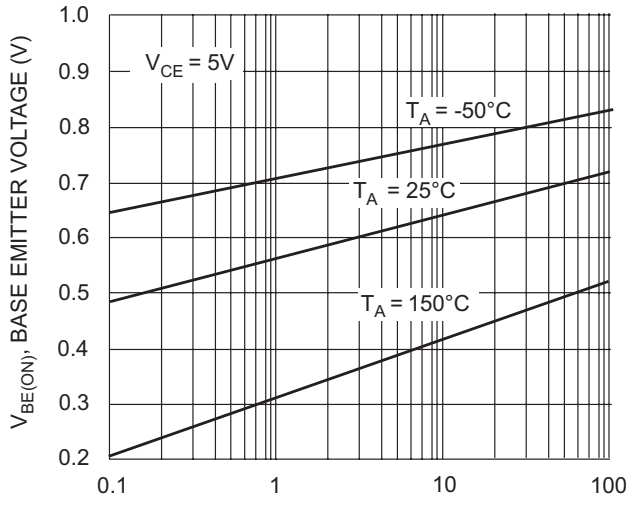


Fig. 6 Base Emitter Voltage vs. Collector Current

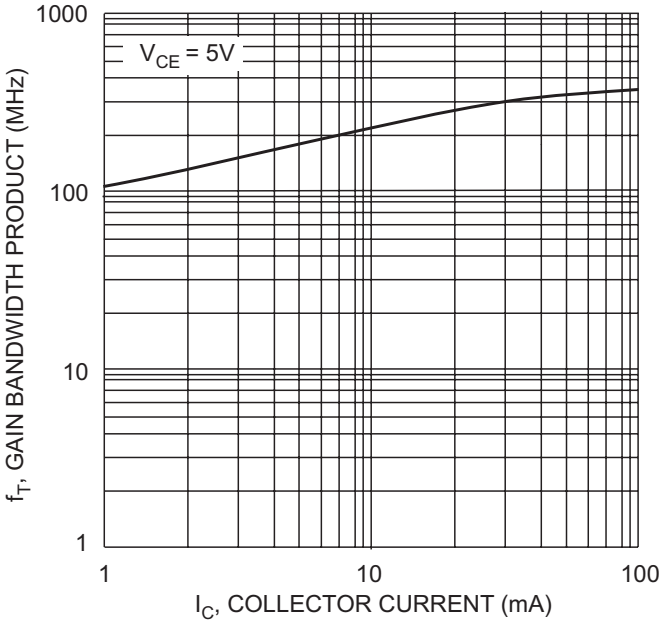



Fig. 7 Gain Bandwidth Product vs. Collector Current

Ordering Information (Note 5)

Device	Packaging	Shipping
MMDT2222V-7	SOT-563	3000/Tape & Reel

Notes: 5. For Packaging Details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

Marking Information



KAT = Product Type Marking Code
YM = Date Code Marking
Y = Year ex: R = 2004
M = Month ex: 9 = September

Date Code Key

Year	2004	2005	2006	2007	2008	2009
Code	R	S	T	U	V	W

Month	Jan	Feb	March	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D