

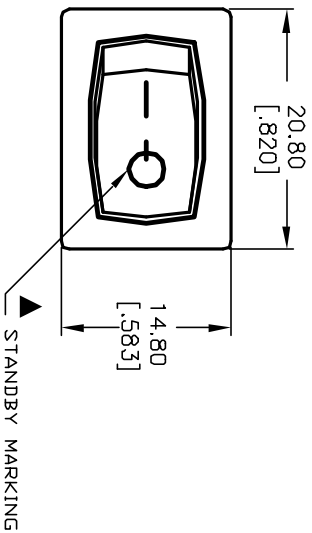

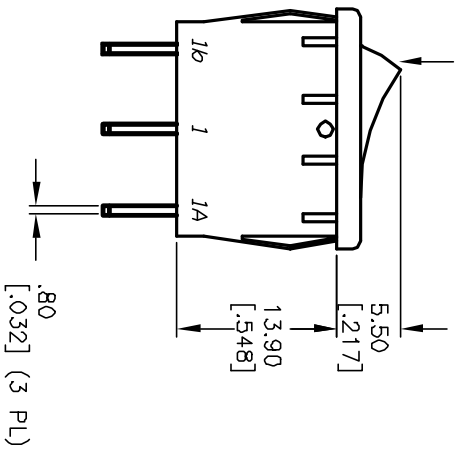


PANEL THICKNESS	X dimension
0.75-1.25 [0.30-0.49]	19.2- <i>0.1</i> [7.56]
1.25-2.0 [0.49-0.79]	19.4- <i>0.1</i> [7.64]
2.0-3.0 [0.79-1.18]	19.8- <i>0.1</i> [7.80]

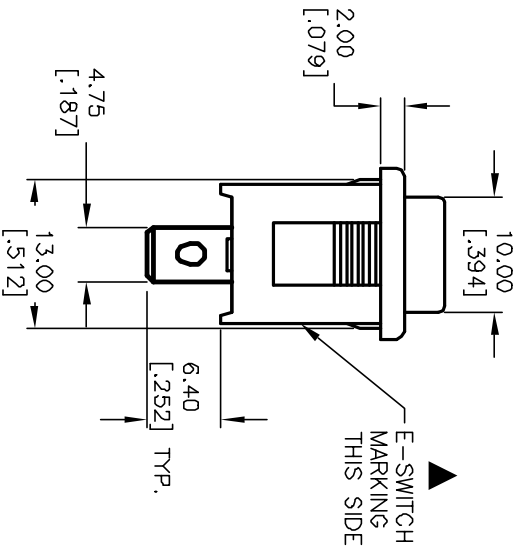


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
1-1a	OPEN	1-1b



CIRCUIT: SPD

- NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 15A @ 125VAC OR
6A @ 250VAC
5. MATERIALS: TERMINALS: Silver Plated Copper Alloy
CONTACTS: Coin Silver, Silver Plated
6. ELECTRIC LIFE: 10,000 cycles
7. CONTACT RESISTANCE: $< 20 \text{ Mega } \Omega$
8. INSULATION RESISTANCE: $> 1000 \text{ Mega } \Omega$
9. DIELECTRIC STRENGTH: $> 1500 \text{ V } 1 \text{ minute}$
 $> 3000 \text{ V between poles}$

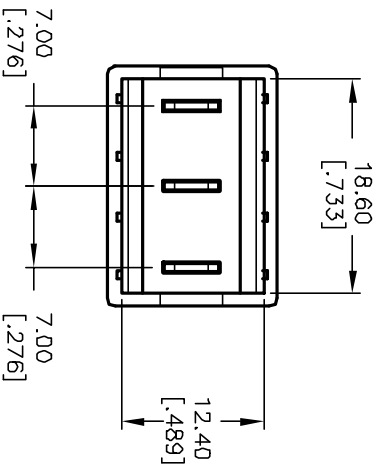

				TITLE			
				R1966C BLK BLK (SP) F			
C	11463	ADD TERMINAL	9/14/01	CJB			
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
SCALE		DATE		DR	DWG	REV	
1.5:1		9/10/01		CJB	M300004	C	