



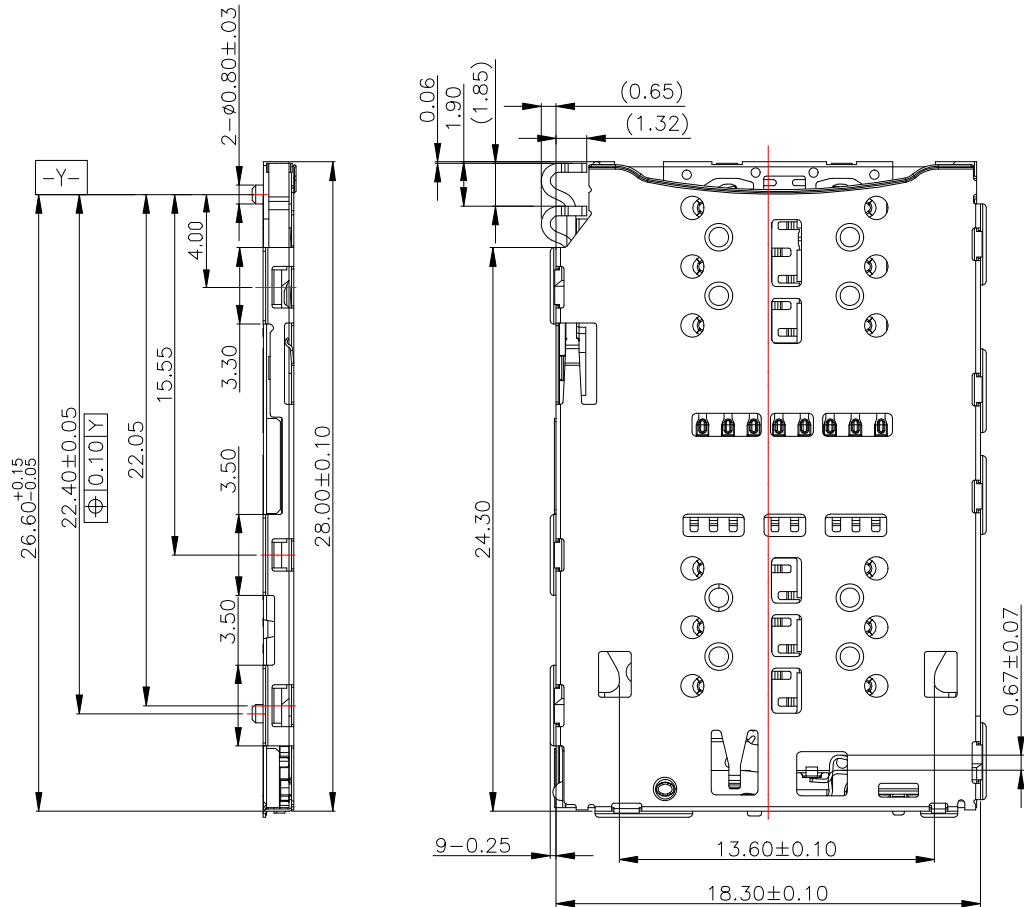

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

NOTES:

- 1.) PRODUCT SPECIFICATIONS:
 VOLTAGE RATING: 10V
 CURRENT RATING: 0.3A
 INSULATION RESISTANCE: 1000 MEG.OHM MIN
 CONTACT RESISTANCE: INITIAL 50mΩ Max;AFTER TEST ΔR=25mΩ
 OPERATION TEMPERATURE: -40° TO +85°
 DURABILITY: 3000 CYCLES

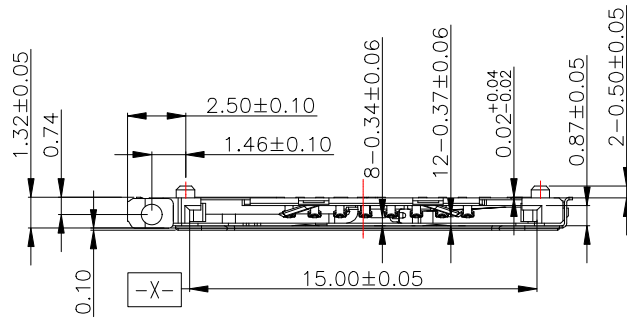

ITEM	NAME	MATERIAL	Q'TY	REMARK
8	HOOK	THERMOPLASTIC UL94 V-0	2	NO PLATING, BLACK MOISTURE PROOF GRADE:2a
7	DETECT SWITCH	COPPER ALLOY	1	15u"Min Au PLATING ON CONTACT AREA, 3u"Min Au PLATING ON SOLDER TAILS, Ni UNDERPLATING OVERALL
6	DETECT LEVER	COPPER ALLOY	1	
5	EJECT LEVER	STAINLESS STEEL	1	NO PLATING
4	EJECT BAR	STAINLESS STEEL	1	NO PLATING
3	SHELL	STAINLESS STEEL	1	3u"Min Au PLATING ON SOLDER TAILS, Ni UNDERPLATING OVER ALL
2	CONTACT	COPPER ALLOY	1	Au PLATING ON CONTACT AREA(SEE P/N) 3u"Min Au PLATING ON SOLDER TAILS, Ni UNDERPLATING OVER ALL
1	HOUSING	THERMOPLASTIC UL94 V-0	1	BLACK COLOR, MOISTURE PROOF GRADE:2c

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
 X :±0.25 X :±5°
 X.X :±0.15 X.X :±3°
 X.XX :±0.05




东莞市汉博电子科技有限公司
 DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	1.35H 3选2 卡座 FOR CUSTOMER		
DWN	xiong	PART NO. MCS-102	
CHKD	lee	SCALE:1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET:1OF 1



CUSTOMER COPY



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

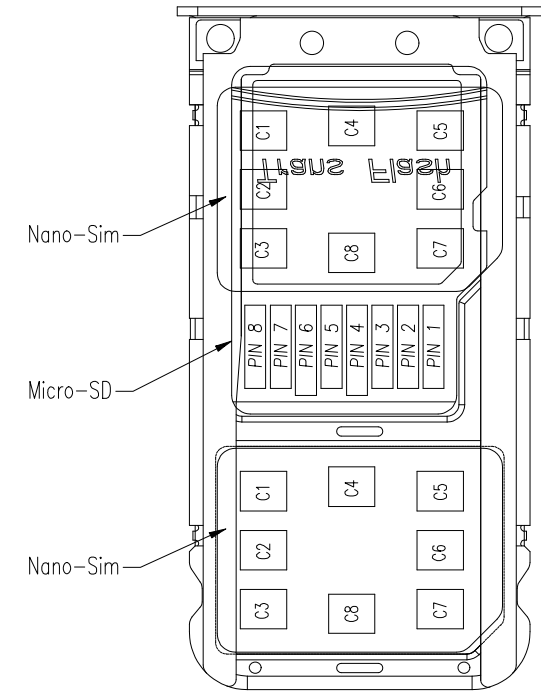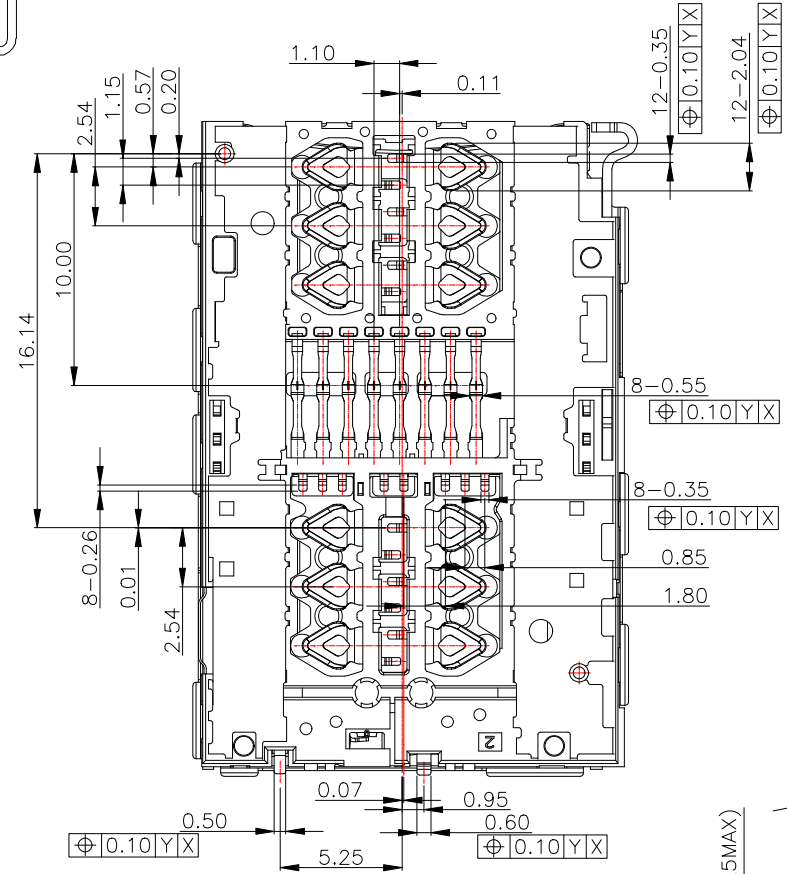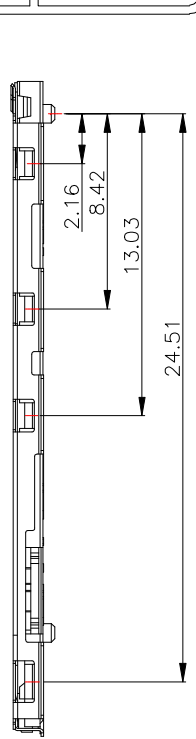


BOTTOM VIEW

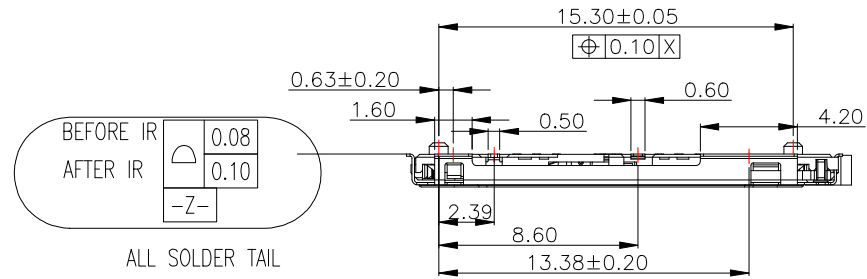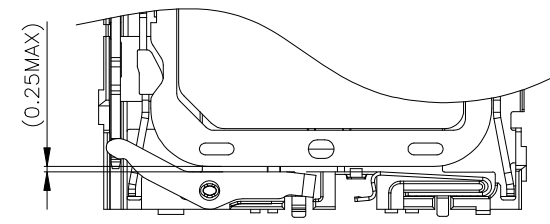


UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:		TITLE			
X	:±0.25	ANGLES:		1.35H 3选2 卡座 FOR CUSTOMER	
X.X	:±0.15	DWN	xiong	PART NO. MCS-102	
X.XX	:±0.05	CHKD	lee	SCALE:1:1	UNIT: mm
		APVD	wang	SIZE: A4	SHEET:10F 1
					REV: A4
CUSTOMER COPY					



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

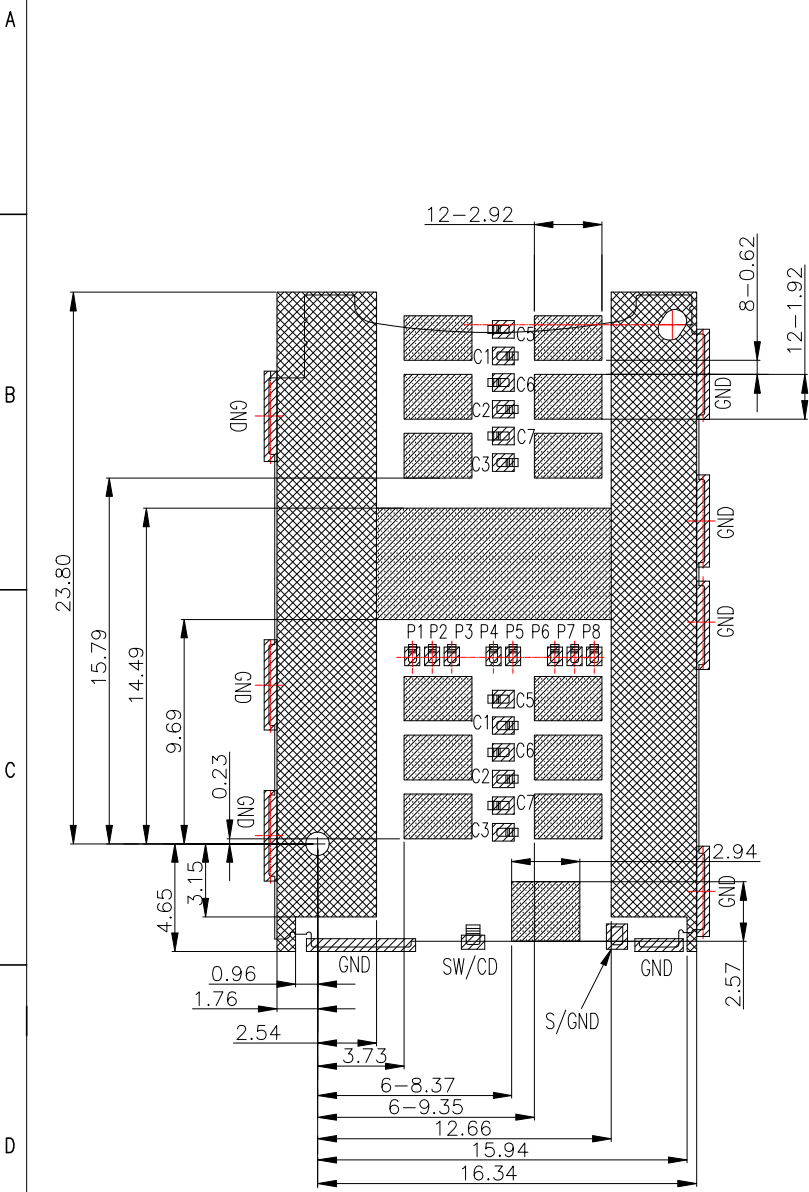

- Through Hole
 - ▨ Soldering Pad Area
 - ▩ Open Wire Restricted Area
(Possibility Touch Of Components On PCB)
 - ▧ No Soldering Pad Area (Independent Pad Area)
OR Open Wire & Copper Restricted Area
- 1: Touch area of contact tips, No electrical function and only for mechanical function.
2: No first PCB-Layout circuits in the area.

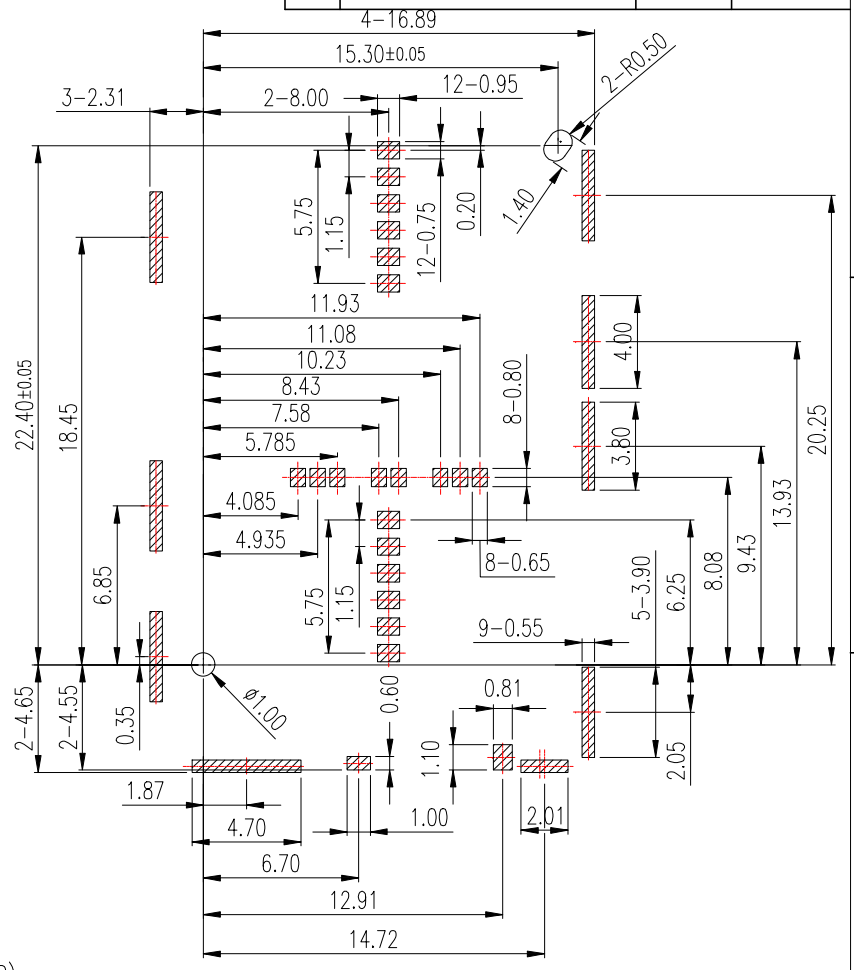



UNLESS OTHERWISE SPECIFIED TOLERANCES		东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS:	ANGLES:	TITLE 1.35H 3选2 卡座 FOR CUSTOMER			
X : ±0.25	X : ±5°	DWN	xiong	PART NO. MCS-102	
X.X : ±0.15	X.X : ±3°	CHKD	lee	SCALE: 1:1	UNIT: mm
X.XX : ±0.05		APVD	wang	SIZE: A4	SHEET: 1 OF 1
		CUSTOMER COPY			

D


D







REV.	ECN NO OR DESCRIPTION	REVISED	DATE

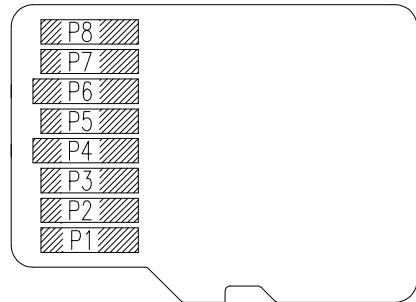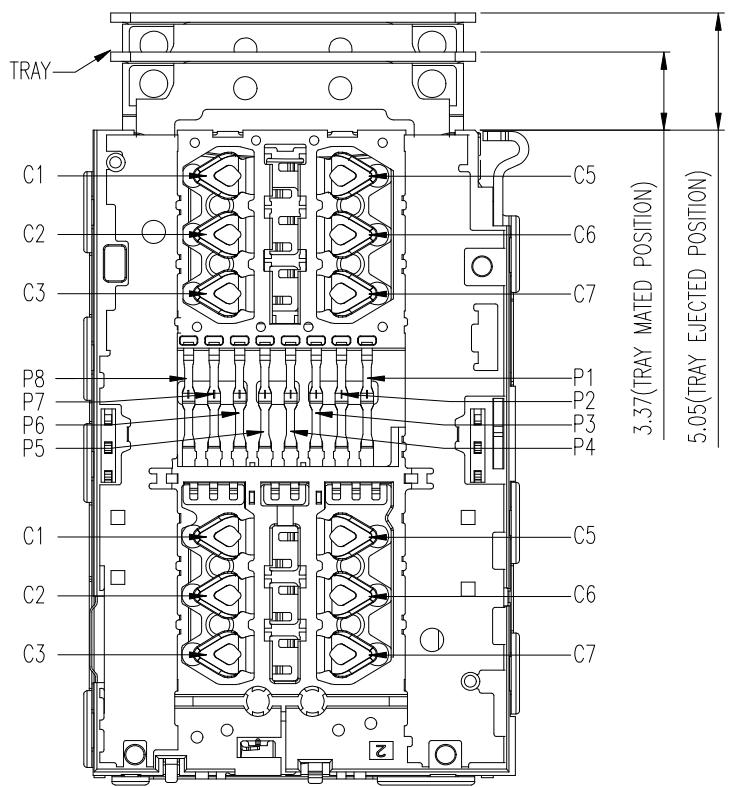

Micro SD CARD ELECTRICAL



NANO SIM CARD ELECTRICAL

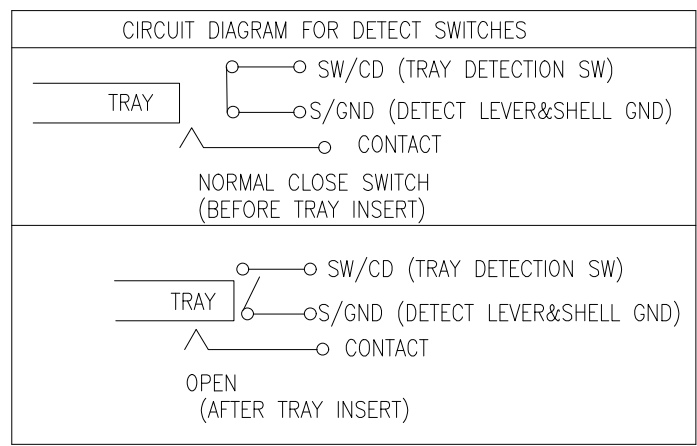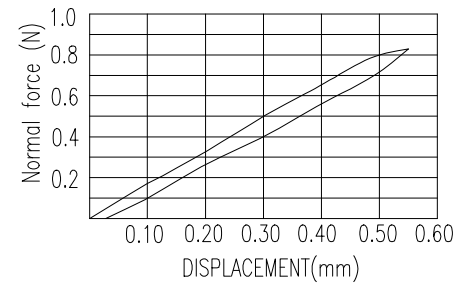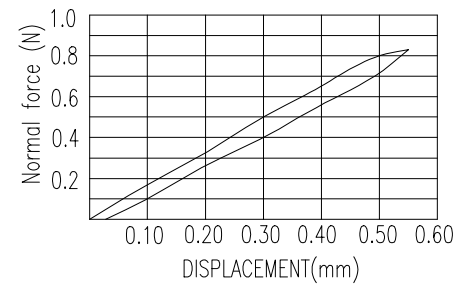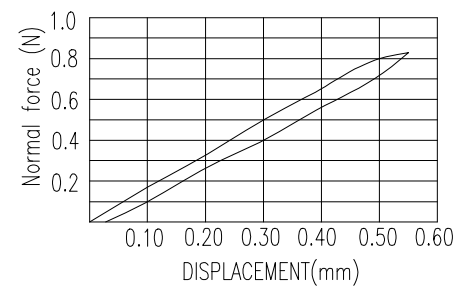

ITEM	FUNCTION
Micro SD CARD	
P1	DAT2 OF MSD
P2	CD/DAT3 OF MSD
P3	CMD OF MSD
P4	VDD OF MSD
P5	CLK OF MSD
P6	VSS OF MSD
P7	DAT0 OF MSD
P8	DAT1 OF MSD
NANO SIM CARD	
C1	VCC OF SIM
C2	RST OF SIM
C3	CLK OF SIM
C5	GND OF SIM
C6	VPP OF SIM
C7	DATA OF SIM

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: X :±0.25 X.X :±0.15 X.XX :±0.05

ANGLES: X :±5° X.X :±3°

东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE: **1.35H 3选2 卡座 FOR CUSTOMER**

DWN	xiong	PART NO. MCS-102	
CHKD	lee	SCALE: 1:1	UNIT: mm
APVD	wang	SIZE: A4	SHEET: 1 OF 1

CUSTOMER COPY