

AUDIO

SECTION 6

- 4, 6 and 8 way available
- Competitively priced
- Industry Compatible
- PCB Mounting



PCB MINI DIN SOCKETS





SPECIFICATION

Contact resistance:	30mΩ max. (INITIAL)
Insulation resistance:	100mΩ min. AT 500V DC
Withstanding Voltage:	500V AC for one minute
Soldering heat:	260±5°C for 5±1 seconds
Insertion Force:	0.5-4.5 KG
Extraction Force:	0.4-3.5 KG
Lifetime:	5,000 cycles min

OUTLINE DRAWING

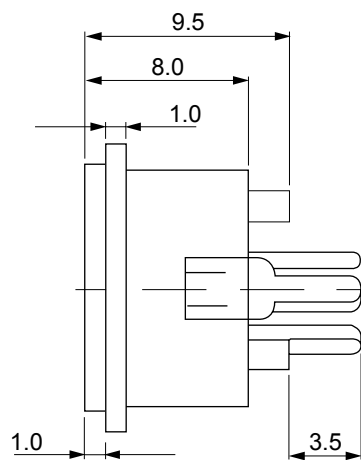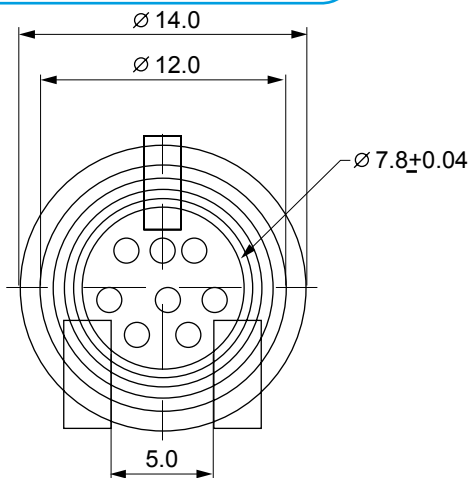

Pin Configuration

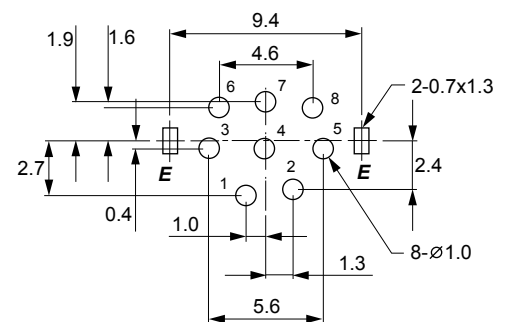

ORDERING INFORMATION

DBC	MD	0510	8
Dubilier Connectors	Mini Din Connector	Series	No. of Ways
			4=4way
			6=6way
			8=8way