


SHEET OF




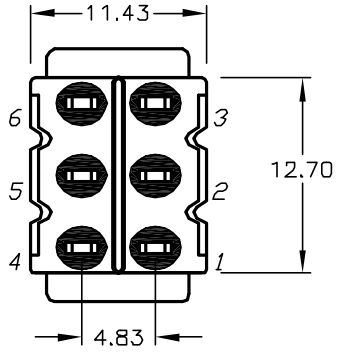



BOTTOM VIEW
BRACKET CROPPED
FOR CLARITY

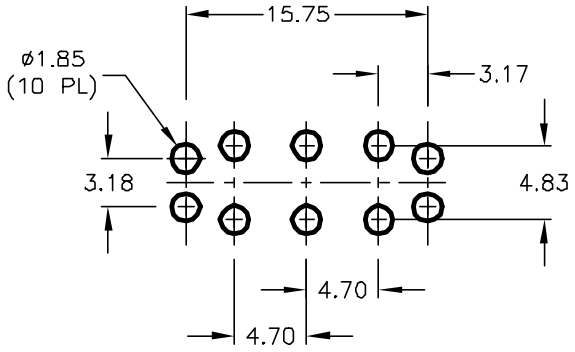

RECOMMENDED PANEL MOUNTING

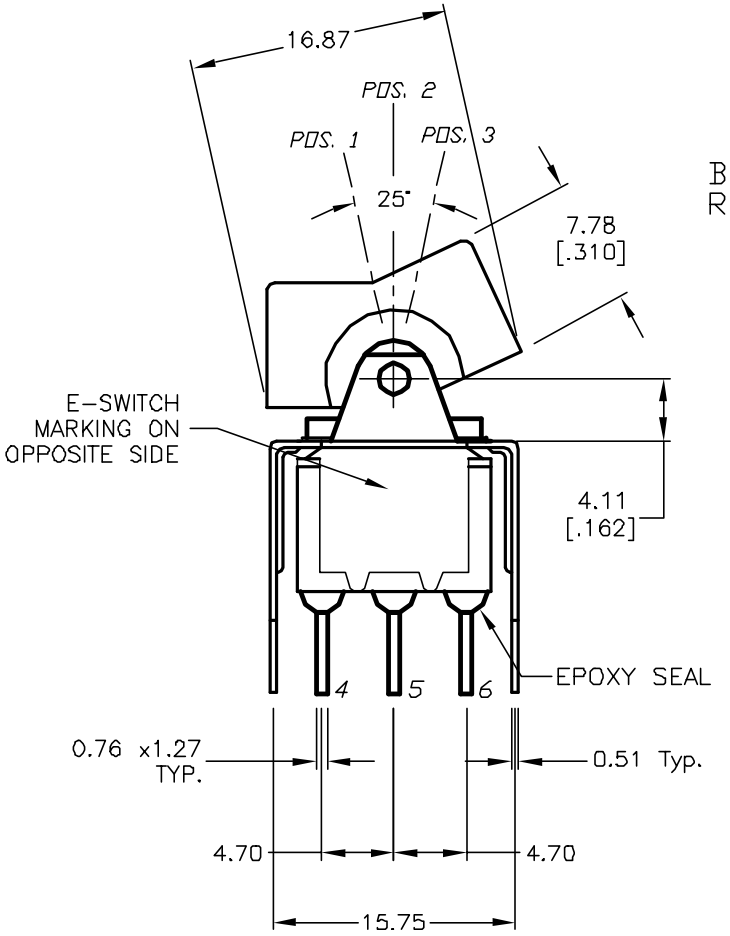

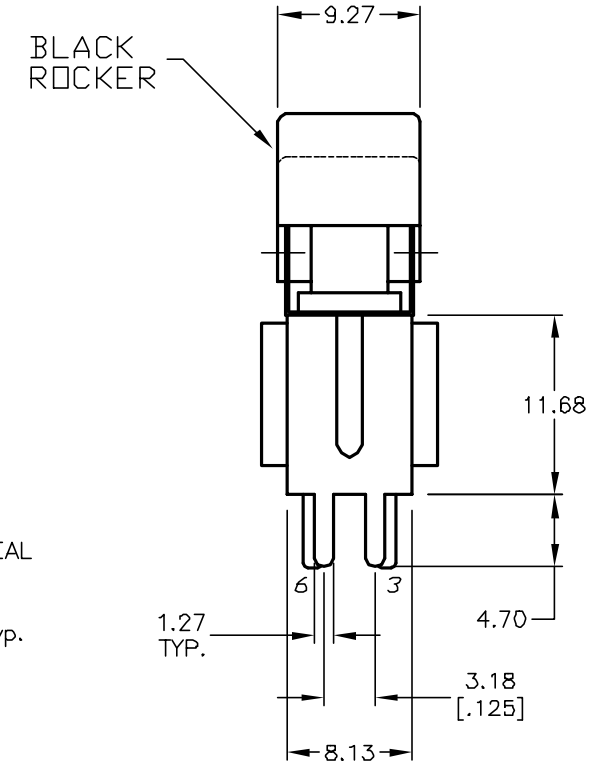



CIRCUIT: DPDT

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3,5-6	OPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4V @20V AC or DC max.
5. ▲ MATERIAL: FIXED TERMINAL & MOVING CONTACT
   Copper Alloy w/GOLD Plate over
   Nickle plate.
6. CONTACT RESISTANCE: 10mILLI Ohms max initial
   @2-4VDC, 100mA for AG & AU
7. ELECTRICAL LIFE: 50,000 make-and-break
   cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sea level
10. OPERATING TEMP.: -30°C to 85°C

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	12056	REVISED AND REDRAWN	4/11/02	CB

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 300 DP-1 J1 BLK VS2 R E (GOLD CONTACTS)

SCALE	DATE	DR	DWG	REV
2:1	4/11/02	CB	T321002	C