Product data sheet

Specifications



Safety dc discrete input module, Modicon TM5, digital 2I, 24V sink

TM5SDI2DFS

Main

Range of product	Modicon TM5
Product or component type	Safety dc discrete input module
Discrete input number	2
Discrete input voltage	24 V

Complementary

Range compatibility	Modicon M258 Modicon LMC058 PacDrive LMC motion controller
Product compatibility	Motion controller PacDrive LMC Pro 2 Logic controller PacDrive LMC Pro PacDrive LMC Eco
Discrete input voltage type	DC
Input voltage limits	20.4...28.8 V
Discrete input logic	Sink
Discrete input current	3.45 mA
Input impedance	7 kOhm
Colour	Red
Voltage state 0 guaranteed	<= 5 V
Voltage state 1 guaranteed	>= 15 V
Input filtering	<= 500 ms configurable by software <= 150 ms hardware
Protection type	Short-circuit protection Overload protection
Isolation	500 Vrms AC insulation between channel and bus No insulation between channels
Maximum voltage drop	<0.6 V at 100 mA
Maximum supply current for sensors	300 mA
Maximum power consumption in W	1 W for internal 0.25 W for bus
Local signalling	1 LED green for power supply 1 LED red for power supply 2 LEDs green/red for input status 2 LEDs red for safety status

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Electrical connection	2 wires
Marking	CE
Safety level	SIL 3 conforming to IEC 61508 SIL 3 conforming to IEC 62061 PL = e conforming to EN 13849-1
Safety reliability data	MTTFd > 100 years PFD < 1E-5 PFH < 1E-9
Net weight	0.025 kg

Environment

Standards	CSA C22.2 No 142 EN 13849-1 IEC 62061 UL 508 IEC 61131-2 IEC 61508
Product certifications	CSA cULus GOST-R
Ambient air temperature for operation	-10…50 °C (vertical installation) -10…55 °C (horizontal installation) -10…60 °C
Ambient air temperature for storage	-40…70 °C
Relative humidity	5…95 % without condensation
IP degree of protection	IP20 conforming to EN 60529
Pollution degree	2 conforming to IEC 60664
Operating altitude	0...2000 m
Storage altitude	0…3000 m
Vibration resistance	1 gn at 8.4…150 Hz on DIN rail 3.5 mm at 5…8.4 Hz on DIN rail
Shock resistance	15 gn for 11 ms
Electromagnetic compatibility	Electrostatic discharge immunity test, 4 kV on contact conforming to EN/IEC 61000-4-2 Electrostatic discharge immunity test, 8 kV in air conforming to EN/IEC 61000-4-2 Susceptibility to electromagnetic fields, 10 V/m 80...2000 MHz conforming to EN/IEC 61000-4-3 Electrical fast transient/burst immunity test, 1 kV I/O conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test, 1 kV shielded cable conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test, 2 kV power lines conforming to EN/IEC 61000-4-4 1.2/50 µs shock waves immunity test, 0.5 kV differential mode conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test, 1 kV common mode conforming to EN/IEC 61000-4-5 Conducted RF disturbances conforming to EN/IEC 61000-4-6 Conducted and radiated emissions conforming to CISPR 11

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	51.0 g
Package 1 Height	3 cm
Package 1 width	6 cm
Package 1 Length	10.5 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACh Regulation	REACh Declaration
REACh free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)

	EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
PVC free	Yes
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

Contractual warranty


Warranty	18 months

Product data sheet
Dimensions Drawings

TM5SDI2DFS


TM5 Slice

Dimensions




TM5 Safety System

Spacing Requirements

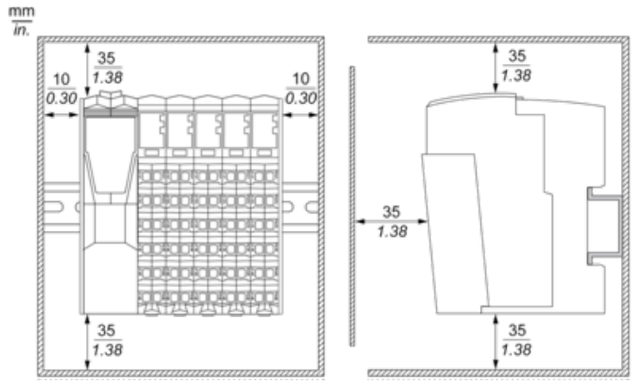

Mounting on a DIN Rail

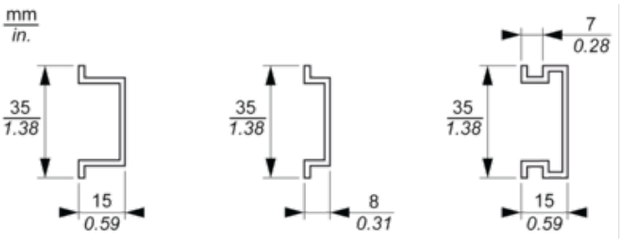


TM5 System Wiring Recommendations

Wire Sizes to Use with the Removable Spring Terminal Blocks

mm / in. 				
mm^2	0,08…2,5	0,25…2,5	0,25…1,5	2 x 0,25…2 x 0,75
AWG	28…14	24…14	24…16	2 x 24…2 x 18

Electronic Module 2DI 24 Vdc Sink 2 Wires

Wiring Diagram



(1) Internal electronics

(2) 24 Vdc I/O power segment integrated into the bus bases

(3) 2-wire sensor