
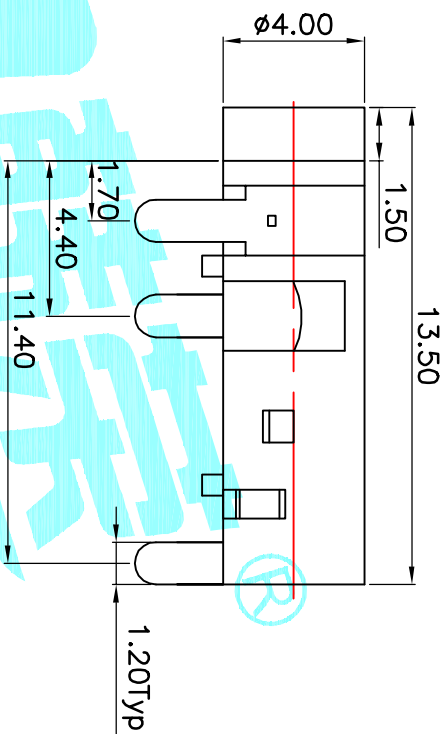


P.C.B LAYOUT(copper-sided view)

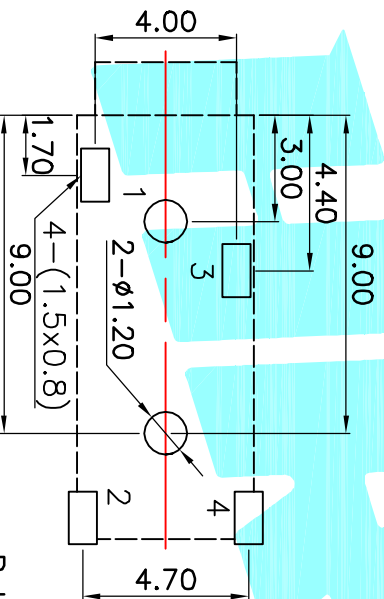

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:−20℃~70℃
 Operating force:3–20N
 Operating Life:5,000cycles

Model NO	PJ-2080B-A	PJ-2080B-B	PJ-2080B-C
Schematic			

② Terminal	4	Phosphor bronze	Au Plating
① Housing	1	Nylon	Black
ITEM	PART NAME	TERN NO.	QTY.
APPROVALS	DATE		
DRAWN	J.X.Zhang	2013/11/11	
CHECKED			
APPROVALS			
TOLERANCES ARE		30 ^μ ±0.1	±0.30
		10 ^μ ~30	±0.20
		5 ^μ ~10	±0.15
		~5	±0.10
ANGLE		±2°	
UNIT: mm			
DRAWING NO.			
TITLE: PHONE JACKES		PART NO. PJ-2080B	
SCALE: 1:1		PROJ.	
DRAWING NO.		SHEET 1 OF 1	

HRON
 ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			