

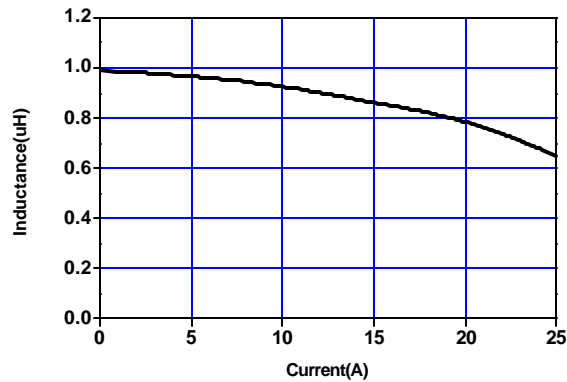


## 1. Mechanical Dimensions:

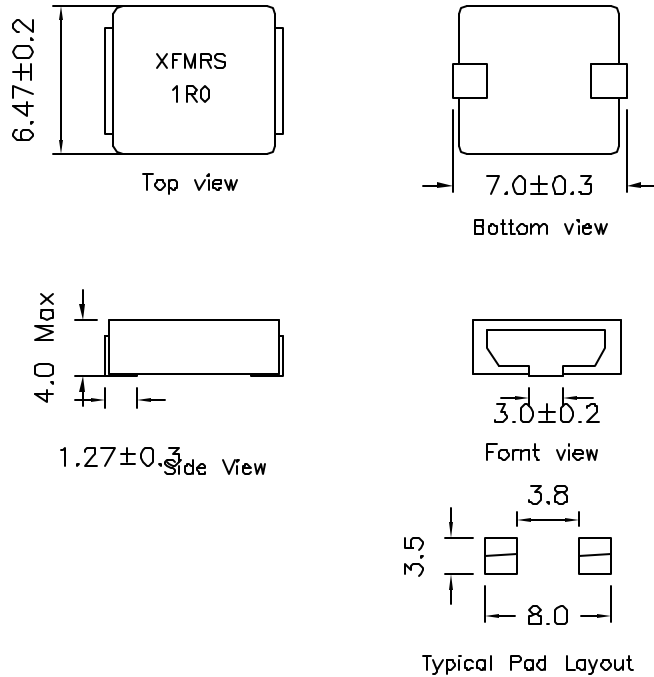

## 2. Schematic:



## 3. Electrical Specifications:

INDUCTANCE: 1.0uH±20% @100KHz 0.1V

Q: 20 Min @100KHz, 0.1V

DC Res: 7 mOhms Max

Irms: 13A Typ (Based on 40°C Temp Rise)

Isat: 18A Typ (Based on 20% drop in OCL)

### Notes:

- Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
- Flammability: UL94V-0
- ASTM oxygen index: > 28%
- Insulation System: Class F 155°C, UL file E151558
- Operating Temperature Range: All listed parameters are to be within tolerance from -55°C to +120°C
- Storage Temperature Range: -55°C to +125°C
- Aqueous wash compatible
- SMD Lead Coplanarity: ±0.004"(0.102mm)
- Electrical and mechanical specifications 100% tested
- RoHS Compliant Component

DOC REV: A/2

**PROPRIETARY** Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com	Title: HIGH CURRENT INDUCTOR		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.010 Dimensions in INCH	P/N:XFHCL6MA-1R0M	REV. A
SHEET 1 OF 1	DWN.	Juan mao	Jun-03-08
	CHK.	YK Liao	Jun-03-08
	APP.	Joe Huff	Jun-03-08