


SPECIFICATION FOR APPROVAL

CUSTOMER		CUST P/N.	
ITEM	Radial Choke Inductor	Description	RL0810N-470K
PART NO.	303-42272	DATE	2016.10.5

(1) DIMENSION(UNIT:mm)



磁芯頂視圖

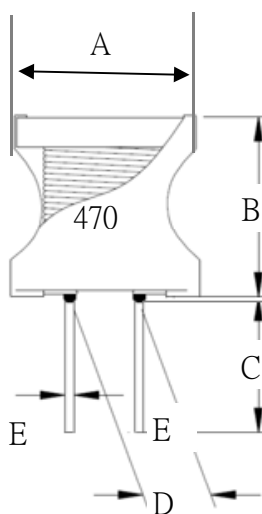

A	10.0(Max)	mm
B	14.0(Max)	mm
C	3.5 ± 0.5	mm
D	5.0 ± 0.5	mm
E	∅0.65 ± 0.1	mm
F		mm
G		mm
H		mm

(2) ELECTRICAL REQUIREMENTS

TEST CONDITION		FREQUENCY		(3) TEST INSTRUMENTS	
		VOLTAGE			
L	47.0μH ± 10%	1KHz	0.25V	LCR-METER:	
				V	HP-4291A WK3260B
DCR	110.0mΩ (Max)	KHz	V	DC RESISTANCE METER:	
				V	WK3260B
IDC	1.5A (Max)	1KHz	0.25V	CURRENT SOURCE:	
				V	TH2816B+1320
		KHz	V	RFIMPENDANCE/MATERIAL ANALYZER	
				TH2816B+1320	
		MHz	V	GW PUNCTURE INSULATION TESTER	

(4) TURNS: 37Ts(REF)

(5) MATERIAL LIST

ITEM	MATERIAL	DESCRIPTION
1	Ferrite CORE	SR60 DRW8×10FS0
2	WIRE	∅0.5mm(2UEW)
3	TUBE	UL ∅8×12 mm 印"470"
4		

REMARK:

APPROVED	CHECKED	DRAWN BY
姜杰文	姜法寶	王艷