


DARLINGTON PLASTIC POWER TRANSISTORS

BD901 NPN

BD902 PNP

**TO-220
Plastic Package**

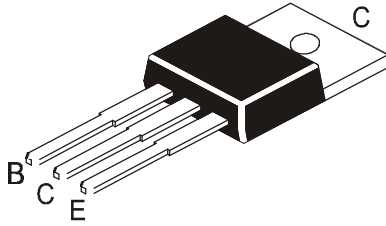

ABSOLUTE MAXIMUM RATINGS ($T_c=25^\circ\text{C}$)



DESCRIPTION	SYMBOL	VALUE	UNIT
Collector Base Voltage	V_{CBO}	100	V
Collector Emitter Voltage	V_{CEO}	100	V
Emitter Base Voltage	V_{EBO}	5.0	V
Collector Current Continuous	I_C	8.0	A
Base Current	I_B	0.3	A
Power Dissipation upto $T_c=25^\circ\text{C}$	P_{tot}	70	W
Junction Temperature	T_j	- 65 to 150	$^\circ\text{C}$
Storage Temperature	T_{stg}	- 65 to 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless specified otherwise)

DESCRIPTION	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Collector Emitter Voltage	V_{CEO}	$I_C=100\text{mA}$, $I_B=0$	100			V
Collector Cut Off Current	I_{CEO}	$V_{CE}=50\text{V}$, $I_B=0$			0.5	mA
Emitter Cut Off Current	I_{EBO}	$V_{EB}=5\text{V}$, $I_C=0$			2.0	mA
Collector Cut Off Current	I_{CBO}	$V_{CB}=100\text{V}$, $I_E=0$			2.0	mA
DC Current Gain	h_{FE}	$I_C=3\text{A}$, $V_{CE}=3\text{V}$	750			
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=3\text{A}$, $I_B=12\text{mA}$			2.5	V
Base Emitter on Voltage	$V_{BE(on)}$	$I_C=3\text{A}$, $V_{CE}=3\text{V}$			2.5	V
Parallel Diode Forward Voltage	V_F	$I_F=8\text{A}$			3.5	V



BD901_902Rev261208E

TO-220 Plastic Package

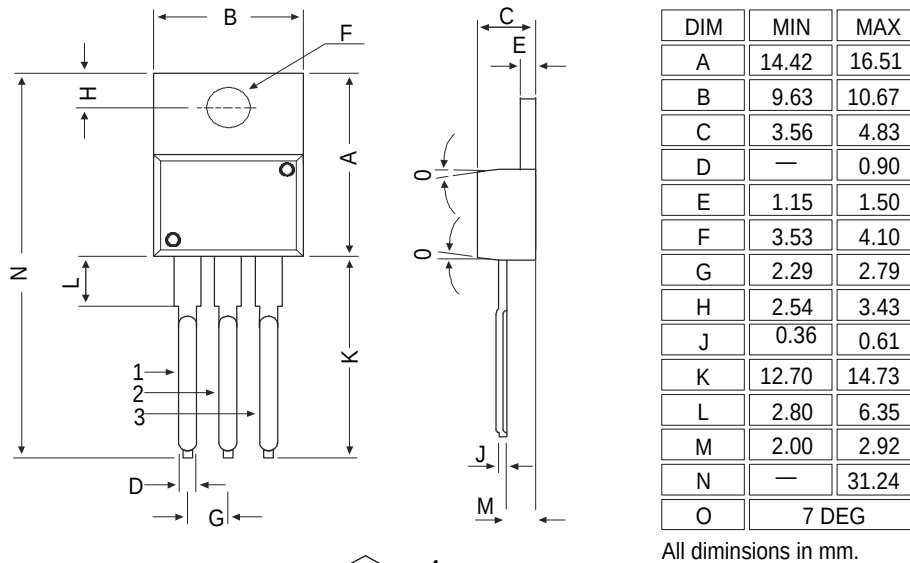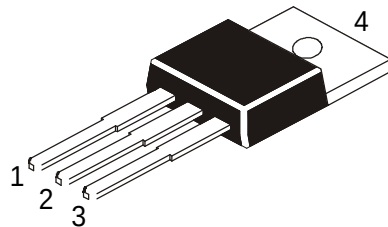

- Pin Configuration
1. Base
 2. Collector
 3. Emitter
 4. Collector

TO-220 Tube Packing

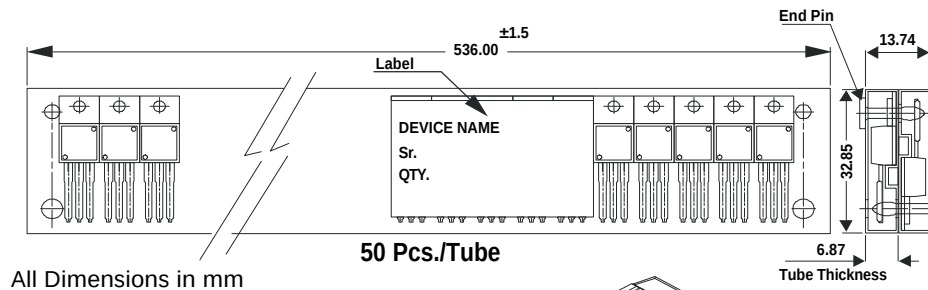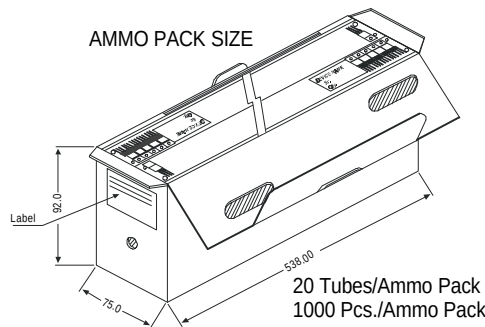

Packing Detail

PACKAGE	STANDARD PACK		INNER CARTON BOX		OUTER CARTON BOX		
	Details	Net Weight/Qty	Size	Qty	Size	Qty	Gr Wt
TO-220	200 pcs/polybag	396 gm/200 pcs	3" x 7.5" x 7.5"	1.0K	17" x 15" x 13.5"	16.0K	36 kgs
	50 pcs/tube	120 gm/50 pcs	3.5" x 3.7" x 21.5"	1.0K	19" x 19" x 19"	10.0K	29 kgs

BD901_902Rev261208E

Component Disposal Instructions

1. CDIL Semiconductor Devices are RoHS compliant, customers are requested to please dispose as per prevailing Environmental Legislation of their Country.
2. In Europe, please dispose as per EU Directive 2002/96/EC on Waste Electrical and

Disclaimer

The product information and the selection guides facilitate selection of the CDIL's Semiconductor Device(s) best suited for application in your product(s) as per your requirement. It is recommended that you completely review our Data Sheet(s) so as to confirm that the Device(s) meet functionality parameters for your application. The information furnished in the Data Sheet and on the CDIL Web Site/CD are believed to be accurate and reliable. CDIL however, does not assume responsibility for inaccuracies or incomplete information. Furthermore, CDIL does not assume liability whatsoever, arising out of the application or use of any CDIL product; neither does it convey any license under its patent rights nor rights of others. These products are not designed for use in life saving/support appliances or systems. CDIL customers selling these products (either as individual Semiconductor Devices or incorporated in their end products), in any life saving/support appliances or systems or applications do so at their own risk and CDIL will not be responsible for any damages resulting from such sale(s).

CDIL strives for continuous improvement and reserves the right to change the specifications of its products without prior notice.



CDIL is a registered Trademark of
Continental Device India Limited

C-120 Naraina Industrial Area, New Delhi 110 028, India.
Telephone + 91-11-2579 6150, 4141 1112 Fax + 91-11-2579 5290, 4141 1119
email@cdil.com www.cdilsemi.com

BD901_902Rev261208E