

6

5

4



3

2



1

APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	6/17/05	
A		CHANGE TERMINAL	8/15/08	
B		REDRAWN	3/12/09	SS
C		UPDATED MARKINGS	12/18/12	SS
D		REVISED SPEC.	12/20/12	
E		REDRAWN	12/20/12	

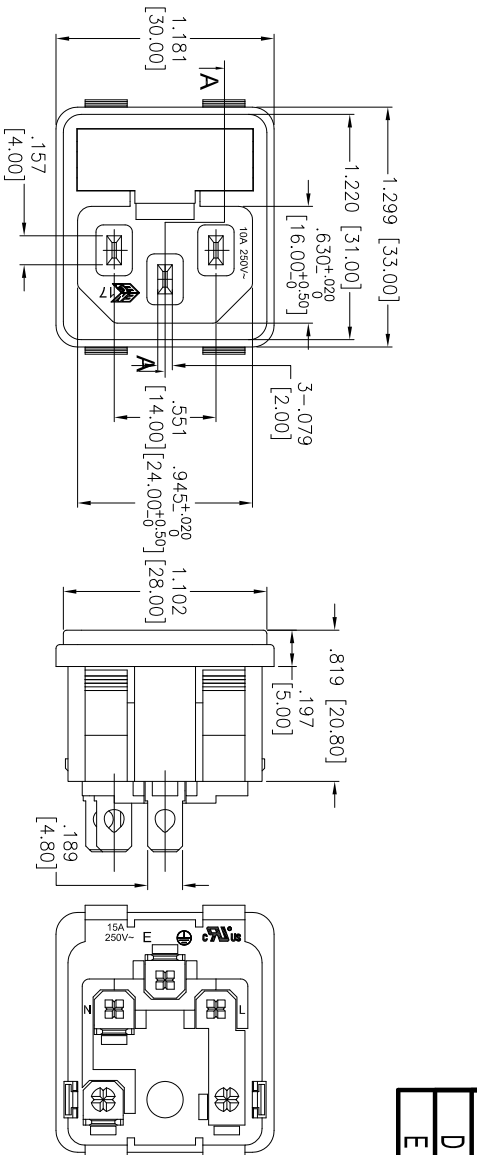

PANEL THICKNESS	DIMENSIONS	
	A	
.031-.071 [0.80-1.80]	1.240	[31.50]
.075-.126 [1.90-3.20]	1.248	[31.70]

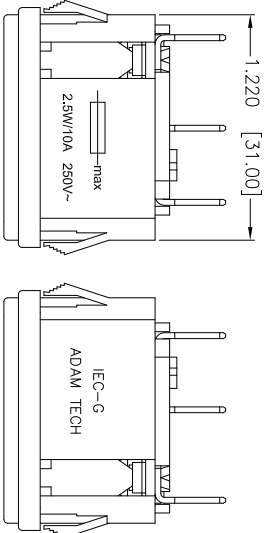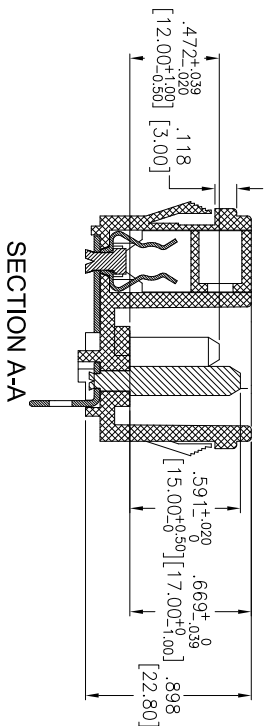

TERMINAL OPTIONS		
-1	-2	-3
.187 Q.C.	.250 Q.C.	.157 Solder

SPECIFICATIONS:
 Material: Insulator: Nylon 66, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Tin over Copper underplate overall
 Electrical: Operating voltage: 250 VAC
 Current rating: UL & CSA: 15 Amps max
 ENEC: 10 Amps max
 Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 3,000 VAC for 1 minute
 Environmental: Lead free, RoHS compliant

ADAM TECH

909 Railway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

**IEC MALE INLET, SNAP-IN PANEL MOUNT
5 X 20mm FUSE HOLDER**

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES		HOLE SIZE	
.X ± .10	ØXX ± .10	ØXX ± .10	± .10
.XX ± .020	ØXXX ± .015	ØXXX ± .015	± .015
.XXX ± .015	ØXXXX ± .010	ØXXXX ± .010	± .010
APPROVALS		DATE	
DRAWN	SS	6/17/05	
CHECKED			
APPROVED	SS	3/17/09	

TITLE		SIZE		PART NO.		REV.	
IEC MALE INLET, SNAP-IN PANEL MOUNT		X		IEC-G-X		E	
REF: S00087C		SCALE: NTS		SHEET 1 OF 1			

6

5

4

3

2

1

6

5

4

3

2

1

