
T1/E1 and ISDN-PRI Transformer

EPA4027S




- UL94V-0 Recognized Materials
- UL1446 Class B Insulating System
- Operating Temperature : 0°C to +70°C
- Surface Mount Package
- 1500 Vrms Isolation


Electrical Parameters @ 25°C

Primary Inductance (mH Typ.)		**Leakage Inductance** (μH Max.)		**Interwinding Capacitance** (pF Max.)		**DCR** (Ω Max.)		**Crosstalk** (dB Typ.)
		Pri.				Pri.	Pri.	0.1-10 MHz
Pins 16-14	Pins 6-8	A	B	A	B	A	B	-60
1.2	1.2	0.4	0.4	30	30	0.7	0.7	

Schematics

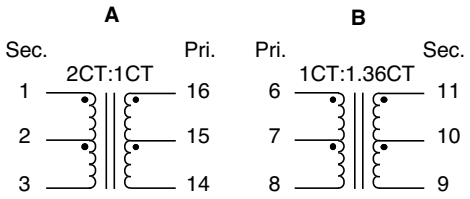

Package

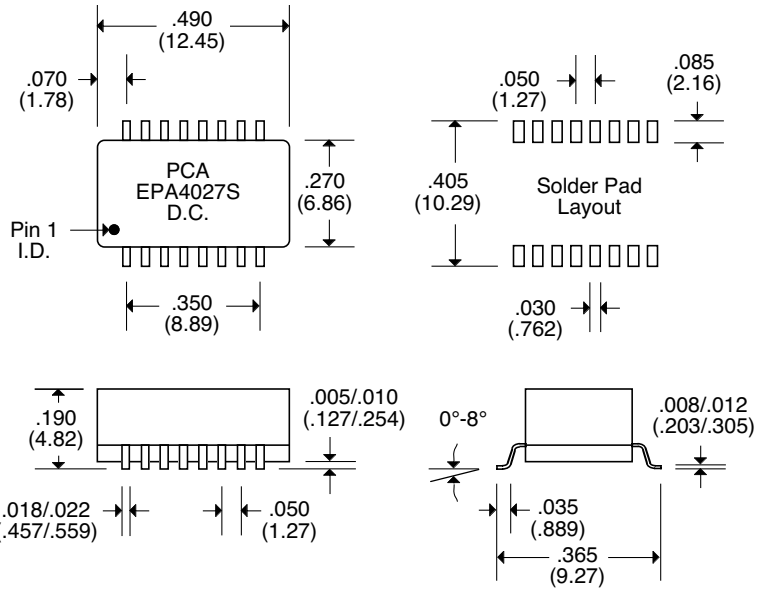

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com