


Z2 SMB1 ... Z2 SMB200 (2W)

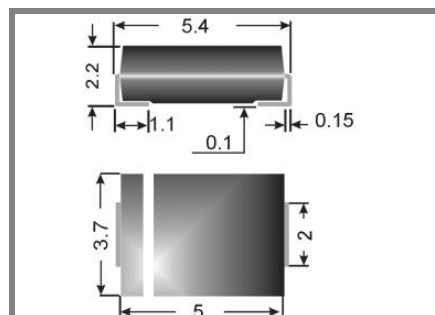

Surface mount diode

Zener silicon diodes

Z2 SMB1...Z2 SMB200 (2W)

**Maximum Power
Dissipation: 2 W**

Nominal Z-voltage: 1 to 200 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0
- Standard Zener voltage tolerance is graded to the international E 24 (5%) standard. Other voltage tolerances and higher Zener voltages on request.

Mechanical Data

- Plastic case SMB / DO-214AA
- Weight approx.: 0,1 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 3000 pieces per reel

¹⁾ Mounted on P.C. board with 50 mm² copper pads at each terminal

²⁾ Tested with pulses

³⁾ The Z2SMB1 is a diode operated in forward. Hence, the index of all parameters should be "F" instead of "Z". The cathode, indicated by a white band is to be connected to the negative pole.

Absolute Maximum Ratings T_c = 25 °C, unless otherwise specified			
Symbol	Conditions	Values	Units
P _{tot}	Power dissipation, T _A = 50 °C ¹⁾	2	W
P _{ZSM}	Non repetitive peak power dissipation, t < 10 ms	40	W
R _{thA}	Max. thermal resistance junction to ambient	60	K/W
R _{thT}	Max. thermal resistance junction to terminal	15	K/W
T _j	Operating junction temperature	- 50 ... + 150	°C
T _s	Storage temperature	- 50 ... + 175	°C

Type	Zener Voltage ²⁾ V _Z @I _{ZT}		Test curr. I _{ZT} mA	Dyn. Resistance Z _{ZT} @I _{ZT} Ω	Temp. Coeffiz. of V _Z a _{VZ} 10 ⁻⁴ /°C	Z- curr. ¹⁾ T _A = 50 °C	
	V _{Zmin} V	V _{Zmax} V				I _R μA	I _{Zmax} mA
Z2SMB1 ³⁾	0,71	0,82	100	0,5 (<1)	- 26 ... - 16	-	1000
Z2SMB10	9,4	10,6	50	2 (<4)	+ 5 ... + 9	1	189
Z2SMB11	10,4	11,6	50	4 (<7)	+ 5 ... + 10	1	172
Z2SMB12	11,4	12,7	50	4 (<7)	+ 5 ... + 10	1	157
Z2SMB13	12,4	14,1	50	5 (<10)	+ 5 ... + 10	1	142
Z2SMB15	13,8	15,6	50	5 (<10)	+ 5 ... + 10	1	128
Z2SMB16	15,3	17,1	25	6 (<15)	+ 6 ... + 11	1	117
Z2SMB18	16,8	19,1	25	6 (<15)	+ 6 ... + 11	1	105
Z2SMB20	18,8	21,2	25	6 (<15)	+ 6 ... + 11	1	94
Z2SMB22	20,8	23,3	25	6 (<15)	+ 6 ... + 11	1	86
Z2SMB24	22,8	25,6	25	7 (<15)	+ 6 ... + 11	1	78
Z2SMB27	25,1	28,9	25	7 (<15)	+ 6 ... + 11	1	69
Z2SMB30	28	32	25	8 (<15)	+ 6 ... + 11	1	63
Z2SMB33	31	35	25	8 (<15)	+ 6 ... + 11	1	57
Z2SMB36	34	38	10	16 (<40)	+ 6 ... + 11	1	53
Z2SMB39	37	41	10	20 (<40)	+ 6 ... + 11	1	49
Z2SMB43	40	46	10	24 (<45)	+ 7 ... + 12	1	43
Z2SMB47	44	50	10	24 (<45)	+ 7 ... + 12	1	40
Z2SMB51	48	54	10	25 (<60)	+ 7 ... + 12	1	37
Z2SMB56	52	60	10	25 (<60)	+ 7 ... + 12	1	33
Z2SMB62	58	66	10	25 (<80)	+ 8 ... + 13	1	30
Z2SMB68	64	72	10	25 (<80)	+ 8 ... + 13	1	28
Z2SMB75	70	79	10	30 (<100)	+ 8 ... + 13	1	25
Z2SMB82	77	88	10	30 (<100)	+ 8 ... + 13	1	23
Z2SMB91	85	96	5	40 (<200)	+ 9 ... + 13	1	21
Z2SMB100	94	106	5	60 (<200)	+ 9 ... + 13	1	19
Z2SMB110	104	116	5	80 (<250)	+ 9 ... + 13	1	17
Z2SMB120	114	127	5	80 (<250)	+ 9 ... + 13	1	16
Z2SMB130	124	141	5	90 (<300)	+ 9 ... + 13	1	14
Z2SMB150	138	156	5	100(<300)	+ 9 ... + 13	1	13
Z2SMB160	153	171	5	110(<350)	+ 9 ... + 13	1	12
Z2SMB180	168	191	5	120(<350)	+ 9 ... + 13	1	10
Z2SMB200	188	212	5	150(<350)	+ 9 ... + 13	1	9