

T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio ($\pm 5\%$)

1CT : 2CT & 1 : 1.36CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.6	μ H
Capacitance (C_{ww})		30	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		1.0 & 0.8	Ohms

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 33 pieces per tube


Tape & Reel Available

Primary Pins 14-16 & 6-8


Isolation 1500 V_{RMS} Min.

Operating Temperature Range: -40°C to +85°C

PHYSICAL DIMENSIONS inches (mm)

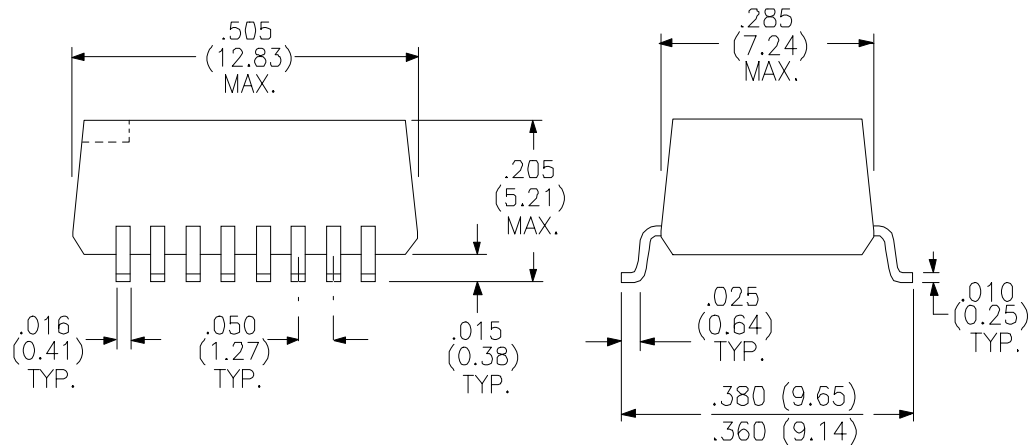

Schematic Diagram

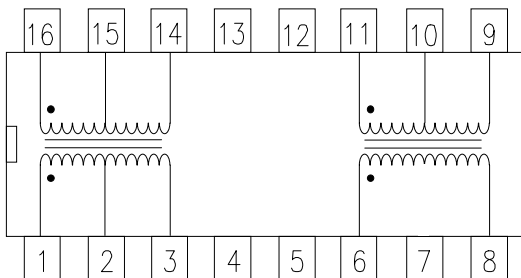

RHOMBUS P/N: **T-14115**

CUST P/N:

NAME:

DATE: 07/02/98

SHEET: 1 OF 1