




**PIN HEADERS**

**DUAL BODY SINGLE ROW 1.27mm**

- Industry compatible
- Competitively priced
- Various plated contacts available
- 1.27mm pitch
- Various pin lengths available

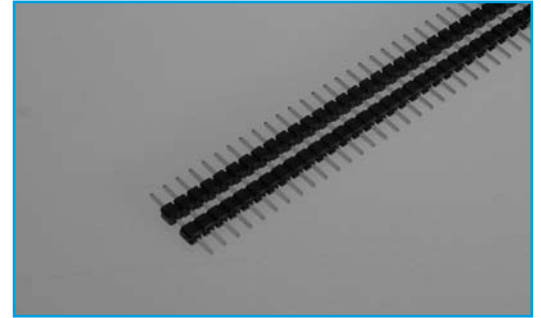


SECTION 8

**SPECIFICATION**

**Material & Finish**

<b>Contact Material:</b>	Brass
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30M $\Omega$ Max at 6V DC 0.3A
<b>Insulator Resistance:</b>	3000M $\Omega$ Min at 500V DC
<b>Dielectric Withstanding</b>	
<b>Voltage:</b>	500V AC for One Minute
<b>Operating Temperature:</b>	-40°C to + 105°C

**OUTLINE DRAWING**

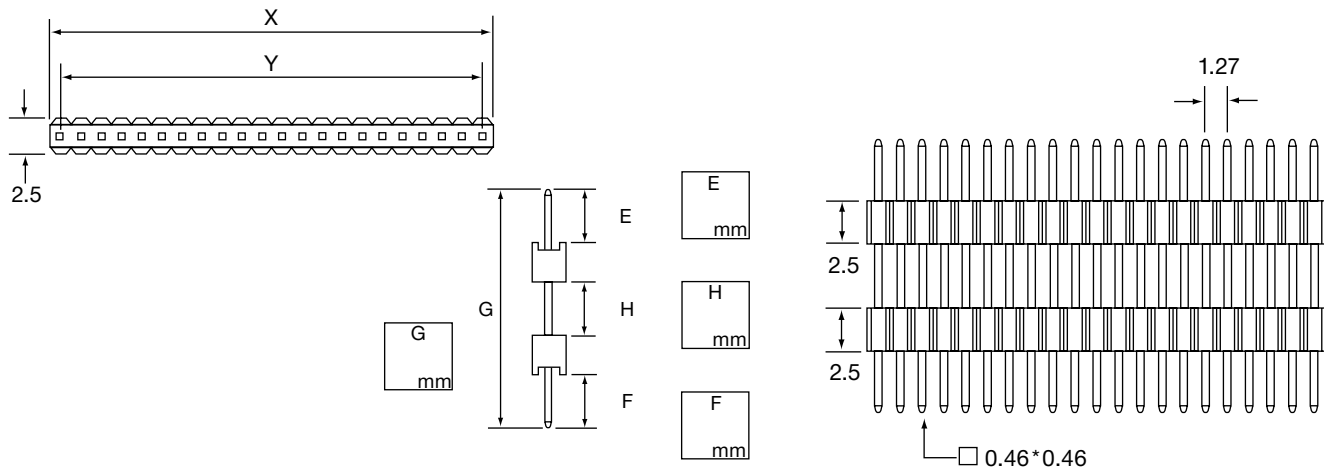

**ORDERING INFORMATION**

DBC	PH	C46	04	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	N° of Ways 02=02way Thro to 40=40way	Contact Material A=Brass	Contact Plating G= Gold Flash S=Selective T=Tin Plated other plating Available	Colour 1=Black	Unique Special Code *See Below

\*Dubilier will allocate a special code to distinguish pin lengths if required