Cable - CABLE-D37F/4XD15F/HF/4M/ETHA

1331987

https://www.phoenixcontact.com/us/products/1331987

Please be informed that the data shown in this PDF document is generated from our Online Catalog. Please find the complete data in the user documentation. Our General Terms of Use for Downloads are valid.



Assembled, halogen-free round cable; controller: Siemens SIMATIC® ET 200SP HA; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (4x 15-position); cable length: 4 m

Commercial Data

Item number	1331987
Packing unit	1 pc
Minimum order quantity	1 pc
Note	Made to Order (non-returnable)
Product Key	CK2155
GTIN	4063151628130
Country of origin	DE

Technical Data

Product properties

Product type	System cable

Insulation characteristics

Overvoltage category	II
Pollution degree	2
Insulation	Functional insulation

Ambient conditions

Degree of protection	IP00
	≥ IP54 (Installation location)
Ambient temperature (operation)	70 °C (fixed installation)
	-10 °C ... 70 °C (flexible installation)
Ambient temperature (storage/transport)	-40 °C ... 80 °C
Altitude	≤ 2000 m

Electrical properties

Max. permissible operating voltage	25 V AC
	60 V DC
Nominal operating mode	100% operating factor
Max. current carrying capacity per path	1 A (50 °C)
	0.6 A (70 °C)
Rated insulation voltage	63 V
Rated surge voltage	0.6 kV

Supported controller SIEMENS ET 200SP HA

Suitable terminal block	6DL1193-6TP00-0BH1
	6DL1193-6TP00-0DH1
	6DL1193-6TP00-0BM1
	6DL1193-6TP00-0DM1
Suitable I/O module	6DL1131-6BL00-0PH1 (Terminal Block H1/M1)
	6DL1132-6BL00-0PH1 (Terminal Block H1/M1)

Cable / line

Cable length	4 m
Number of positions	14
Shielded	no
Conductor type	Assembled, halogen-free round cable
Conductor structure signal line	7x 0.16 mm
AWG signal line	26
Conductor cross section	14x 0.14 mm²
Wire diameter incl. insulation	1 mm ±0.03 mm

External cable diameter	5.8 mm ±0.4 mm
Outer sheath, material	halogen-free (type 2)
External sheath, color	gray
Conductor material	Tin-plated Cu litz wires
Cable resistance	≤ 145 Ω/km (20 °C)
Insulation resistance	≥ 20 MΩ*km (20 °C)
Smallest bending radius, fixed installation	50 mm
Smallest bending radius, movable installation	93 mm
Max. bending cycles	5000 (at a radius of ≥ 15x outside diameter)
Halogen-free	yes
Flame resistance	IEC 60332-1-2 (raw cable)
	VDE 0842, Part 332-1-2 (raw cable)
	IEC 60332-3-22 (raw cable)
Resistance to oil	can withstand occasional splashes (raw cable)
Type	Splitting cable for four modules

Connection data

Field level

Connection method	D-SUB socket strip
Screw thread	UNC 4-40
Number of connections	4
Number of positions	15
Tightening torque	0.2 Nm
Insertion/withdrawal cycles	> 200

Controller level

Connection method	D-SUB socket strip
Screw thread	UNC 4-40
Number of connections	1
Number of positions	37
Tightening torque	0.2 Nm
Insertion/withdrawal cycles	> 200


Standards and regulations

Air clearances and creepage distances

Standards/regulations	DIN EN 50178

Drawings

Diagram

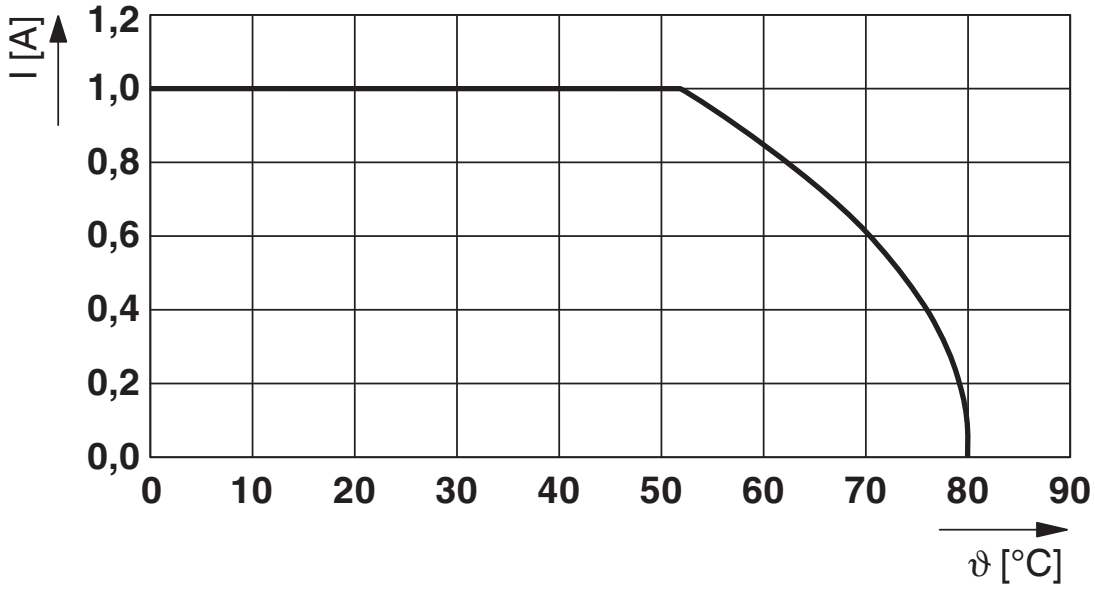

Approvals

UL Listed
Approval ID: FILE E 238705

cUL Listed
Approval ID: FILE E 238705

cULus Listed

Classifications

ECLASS

ECLASS-9.0	27242220
ECLASS-10.0.1	27242220
ECLASS-11.0	27242220

ETIM

ETIM 8.0	EC000237

UNSPSC

UNSPSC 21.0	26121600

Environmental Product Compliance

REACh SVHC	Lead 7439-92-1

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer’s declaration available under “Downloads”

Accessories

Front adapters

Front adapters - FLKM-PA-D37/ETHA - 1076338

https://www.phoenixcontact.com/us/products/1076338



VARIOFACE front adapter for Siemens SIMATIC® ET 200SP HA, with a 37-pos. D-SUB male strip for digital 24 V DC and analog peripheral modules, max. 32 channels can be connected

Adapter module

Adapter module - PLC-V8/D15S/OUT - 2296058

https://www.phoenixcontact.com/us/products/2296058



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of output cards, connection 1: Screw connection 1x, connection 2: D-SUB pin strip 1x 15-position, connection 3: Plug-in connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: plusschaltend

Adapter module

Adapter module - PLC-V8L/D15S/OUT - 1104789

https://www.phoenixcontact.com/us/products/1104789



V8 adapter for 8 x PLC-INTERFACE (14 mm), connection 1: Screw connection 1x, connection 2: D-SUB pin strip 1x 15-position, connection 3: Plug-in connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: plusschaltend

System connection

System connection - PLC-V8/D15S/IN - 2296074

https://www.phoenixcontact.com/us/products/2296074



V8 adapter for 8 x PLC-INTERFACE (6.2 mm), controller: PLC system cabling of input cards, connection 1: Screw connection 1x, connection 2: D-SUB pin strip 1x 15-position, connection 3: Plug-in connection (Can be snapped onto 8x PLC-INTERFACE terminals), number of channels: 8, control logic: plusschaltend

Phoenix Contact 2022 © - all rights reserved
https://www.phoenixcontact.com

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com