


SHEET OF

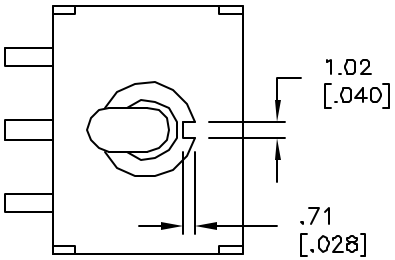


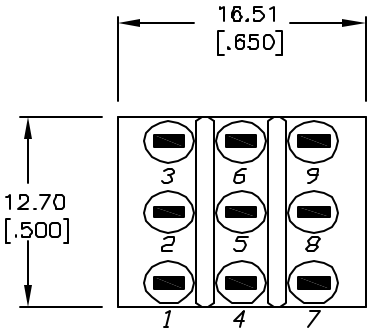


VIEW A-A

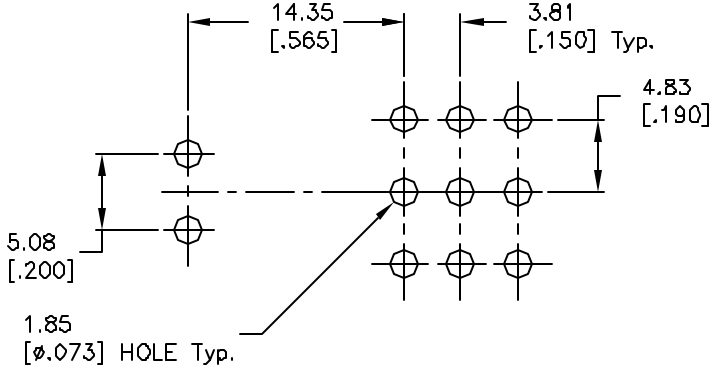

RECOMMENDED P.C.B. LAYOUT

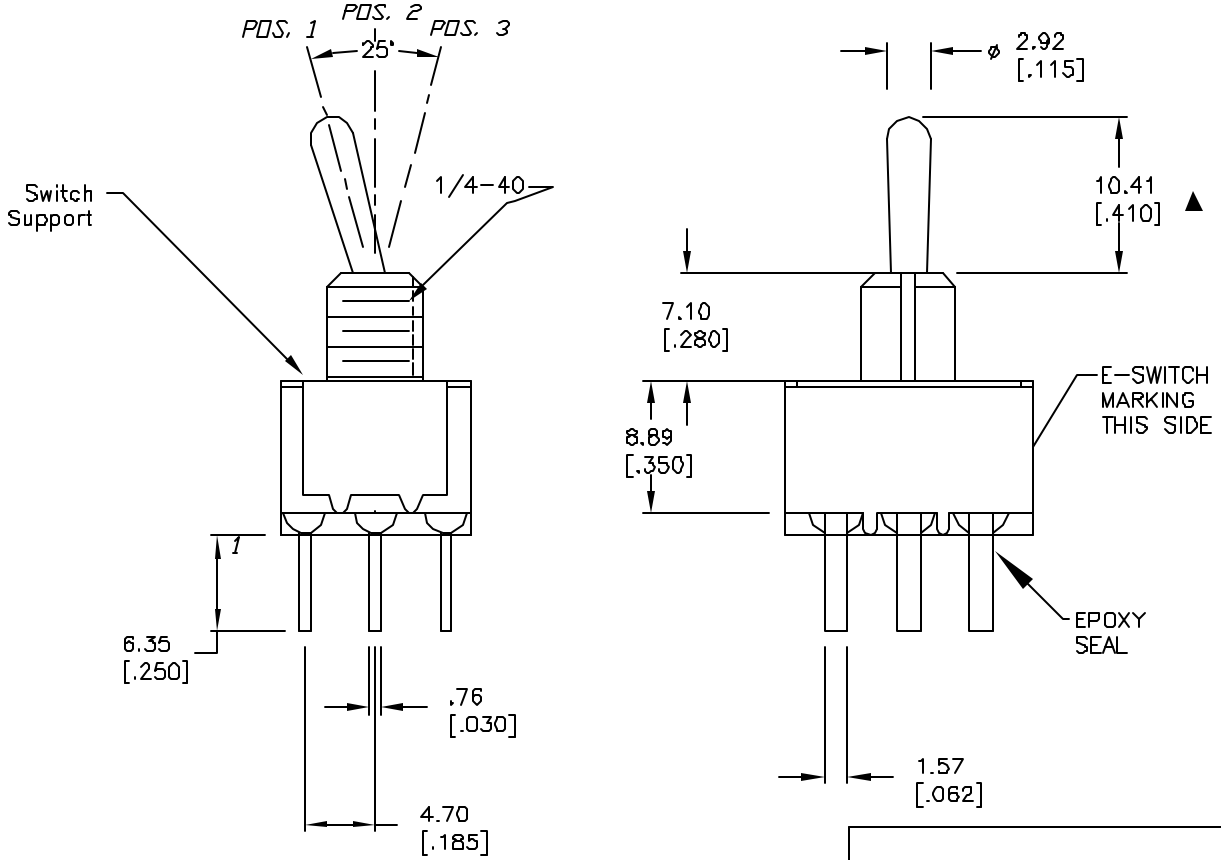

▲ SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
			
(ON)	NONE	(ON)	(ON)=MOMEMTARY
2-3,5-6 8-9	OPEN	2-1,5-4 8-7	



CIRCUIT: 3PDT

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 2A @250VAC; 5A @120VAC
5. CONTACT MATERIAL:
   Copper Alloy W/SILVER Plate over Nickel plate.
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12805	NEW RELEASE	2/11/03	RC

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: 100 3P-4 T1 B4 M3 Q E

SCALE	DATE	DR	DWG	REV
2:1	2/11/03	RC	T134005	A