
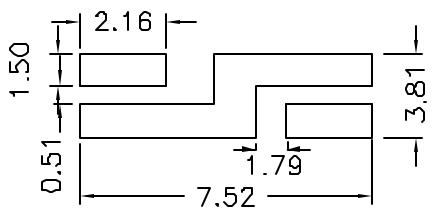

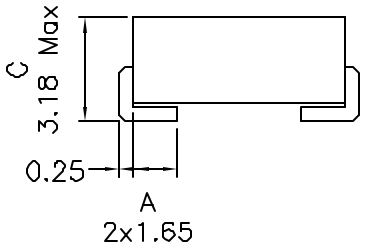


1. Dimensions:




PCB Layout
(Top View)

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004°(0.102mm)
9. Moisture Sensitivity: Level 3
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

DOC. REV: A/1

2. Schematic:



3. Electrical Specs:@25°C

- OCL: 700nH±20% @1MHz 0.1V
- OCL: 475nH±20% @1MHz 1V 7Adc
- Heating Current: 12A (Based on 30% Rise in Temp)
- DCR: 1.80 mOhms Max

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc www.XFMRS.com	Title: High Current Inductor		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM		P/N: XF070603-R70M DWN. Juan Mao CHK. YK Liao APP. BW
Scale 2.5:1 SHT 1 OF 1			