

AT-Cut Crystal - Square Wave - 12.0 Volts

- For high stability STRATUM 2 applications
- Low Jitter
- $< \pm 0.6$ ppm overall frequency tolerance over 15 years
- Full size 14 pin dual-in-line package
- Supply Voltage 12 Volts
- AT-Cut Crystal
- EFC (Voltage control) as standard




DESCRIPTION

OC14T12A series oven-controlled crystal oscillators are intended for Stratum 2 applications requiring low jitter and tight stability < 0.6 ppm overall frequency tolerance over 15 years.


SPECIFICATION

| | |
|--------------------------------|--|
| Crystal Cut: | AT-cut |
| Output Waveform: | Square Wave |
| Supply Voltage: | +12.0 VDC ± 0.5 V |
| Frequency Range: | 1.25MHz to 100.0MHz |
| Initial Calibration Tolerance: | ± 0.5 ppm maximum |
| Frequency Stability | |
| over 0° to +60°C: | ± 0.2 ppm typical ± 0.05 ppm available |
| over -20° to +70°C: | ± 0.3 ppm typical ± 0.1 available |
| over -40° to +85°C: | ± 0.5 ppm typical ± 0.2 ppm available |
| vs. Voltage Change: | < 0.1 ppm for ± 0.5 V change |
| vs. Ageing: | ± 0.7 ppm first year $< \pm 4$ ppm over 10 years |
| vs. Load Change: | < 0.01 ppm for $\pm 5\%$ change |
| Warm-up Time: | 3 minutes maximum |
| Voltage Control | |
| Control Voltage Centre: | +2.5 Volts (V _{CON}) |
| Freq. Deviation Range: | ± 4.0 ppm min., ref. to 25°C |
| Control Voltage Range: | 0V to +5.0Volts |
| Transfer Function: | Positive: Increasing control voltage increases output frequency. |
| Input Impedance: | 47k Ω minimum |
| EFC Linearity: | $\pm 10\%$ maximum |
| Power Dissipation: | 1.0W max. at steady state 2.0W max. at turn on |

OUTLINE & DIMENSIONS

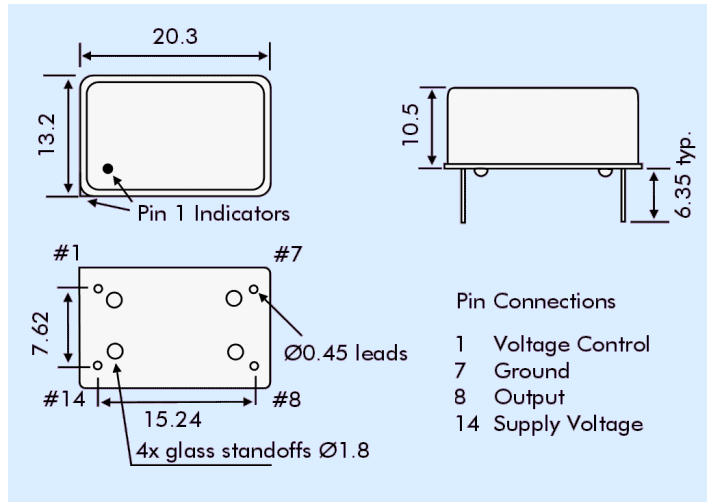

TEST CIRCUIT

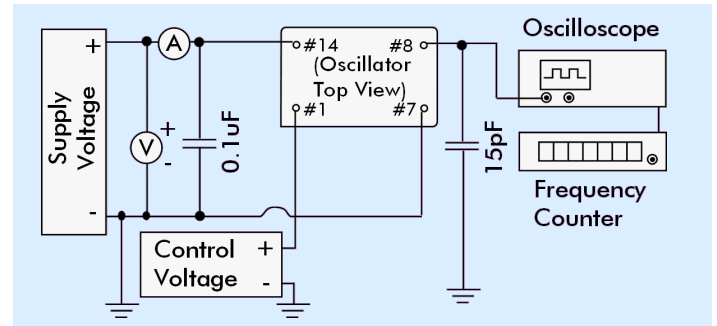

PART NUMBER FORMAT

Example: **OC14GT12A-10.000-0.10/-20+70**

OCXO Package: OC14

RoHS Compliance

G: RoHS Compliant

Blank: Non-compliant

T: Output Squarewave

12: Supply Voltage 12Volts

A: AT-Cut crystal

Nominal Frequency 10.0MHz

Stability in ppm

Operating Temperature Range °C

Lowest Temperature/Highest Temperature

PHASE NOISE (at 10MHz)

| Offset | dBc/Hz |
|--------|--------|
| 1Hz | -60 |
| 10Hz | -90 |
| 100Hz | -120 |
| 1kHz | -130 |
| 10kHz | -140 |