4 / 5 Pin Mini ISO Automotive Relay Socket SC792



-1 For Relay

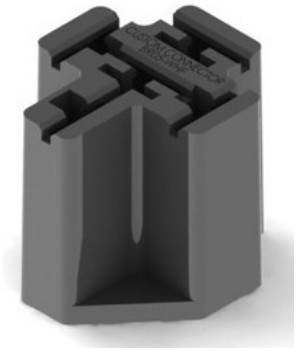

-2 For Relay or Flasher

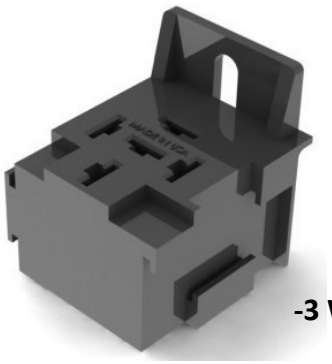

-3 With Bracket

FEATURES

- **Mini ISO Automotive Relay Socket**
- Heat Stabilized Thermoplastic
- -40 to 140°C Operating Temperature
- For Use with Wire Harnessing
- Three Versions
  - -1 No Mounting Bracket for Relay
  - -2 No Mounting Bracket for Relay or Flasher
  - -3 With Mounting Bracket for Relay
- RoHS Compliant

ORDERING INFORMATION

Part Number	Description	Terminal	Form
SC792-1	5 Pin Connector without Mounting Bracket for Wire Harness	Crimp	1A, 1C
SC792-2	5 Pin Connector for Relay or Flasher without Mounting Bracket for Wire Harness	Crimp	1A, 1C
SC792-3	5 Pin Connector with Mounting Bracket for Wire Harness	Crimp	1A, 1C

***For use with PC792A, PC792C, PC792H both 1 Form A (1A) and 1 Form C (1C) Contact Forms**

Order From	Part Number	AWG	Blade
TE Connectivity	42100	14-18	1/4"
TE Connectivity	42281	14-18	1/4"
TE Connectivity	42904	12-16	1/4"
TE Connectivity	60249	12-16	1/4"
TE Connectivity	60253	12-14	1/4"

Picker Components references these terminals to be used with our *Automotive Series Connectors. Current capability of the terminals depends on the gauge of wire used, the quality of the crimp, the addition of solder or a weld, operating conditions, temperature cycling, etc. Terminals to be purchased separately.

3220 Commander Drive, Suite 102 Carrollton, TX 75006 www.PickerComponents.com
Sales: (972) 713-6272 (888) 997-3933 Fax: (972)735-0964 e-mail: sales@pickercomponents.com

Dimensions are listed for reference purposes only. Specifications and Availability subject to change without notice.

DIMENSIONS (mm / inches)

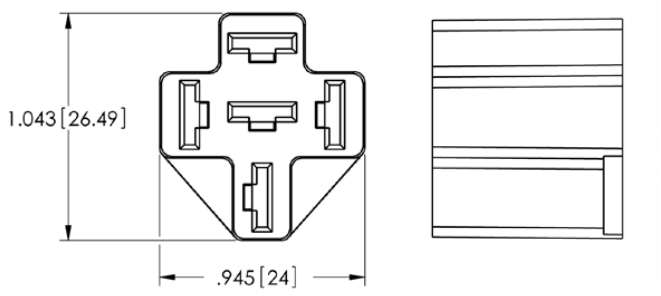

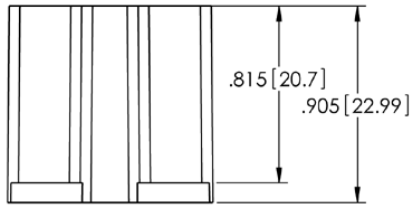

SC792-1

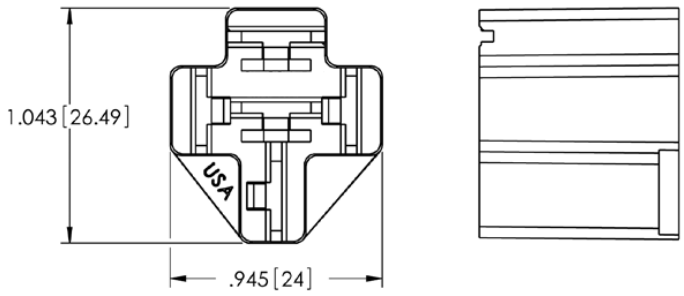

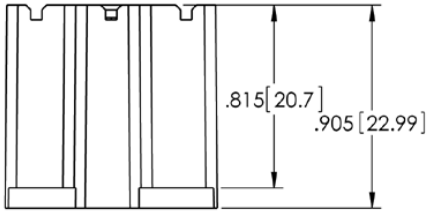

SC792-2

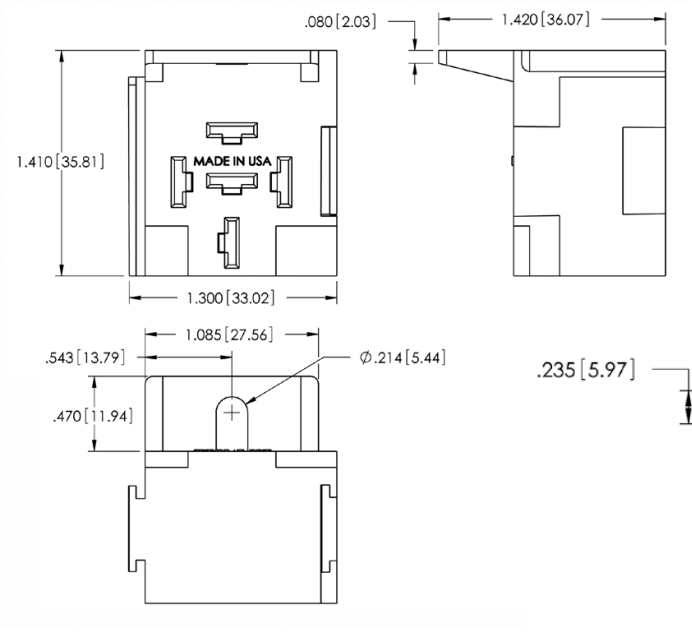

SC792-3 With Mounting Tab

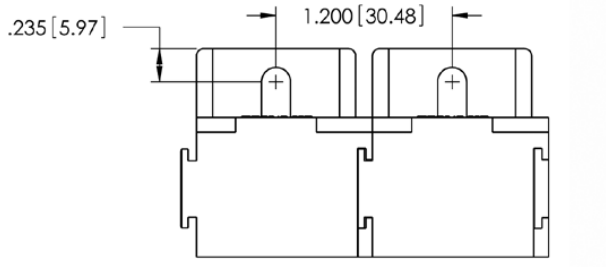

SC792-3 are Stackable

NOTES:

Dimensions are in mm, Inches are listed for reference only.

PICKER COMPONENTS
3220 Commander Drive, Suite 102 Carrollton, TX 75006 www.PickerComponents.com
Sales: (972) 713-6272 (888) 997-3933 Fax: (972)735-0964 e-mail: sales@pickercomponents.com