SPECIFICATION

SPEC. No. C-General-b

D A T E : 2014 June.

To

Non-Controlled Copy

CUSTOMER'S PRODUCT NAME	TDK PRODUCT NAME MULTILAYER CERAMIC CHIP CAPACITORS C Series / Commercial Grade General (Up to 50V) Mid voltage (100 to 630V)

Please return this specification to TDK representatives.
If orders are placed without returned specification, please allow us to judge that specification is accepted by your side.

RECEIPT CONFIRMATION

DATE: YEAR MONTH DAY

TDK Corporation
Sales
Electronic Components
Sales & Marketing Group

TDK-EPC Corporation
Engineering
Ceramic Capacitors Business Group

APPROVED	Person in charge

APPROVED	CHECKED	Person in charge

1. SCOPE

This specification is applicable to chip type multilayer ceramic capacitors with a priority over the other relevant specifications.

Production places defined in this specification shall be TDK-EPC Corporation Japan, TDK (Suzhou) Co., Ltd and TDK Components U.S.A. Inc.

EXPLANATORY NOTE:

This specification warrants the quality of the ceramic chip capacitors. The chips should be evaluated or confirmed a state of mounted on your product.

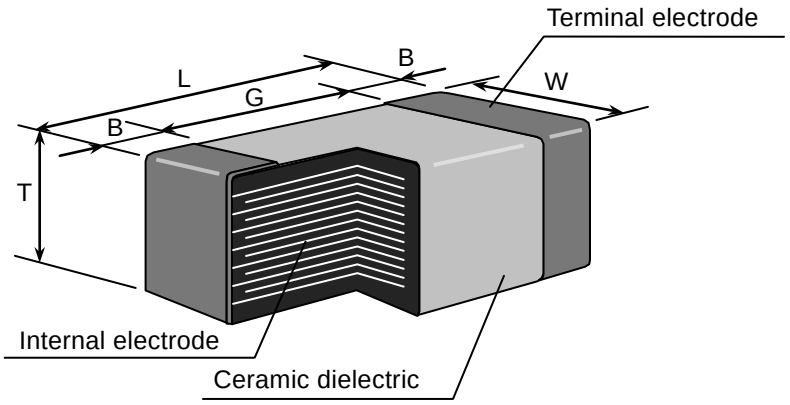
If the use of the chips goes beyond the bounds of the specification, we can not afford to guarantee.

2. CODE CONSTRUCTION

(Example)

Catalog Number :	C2012	X7R	1E	105	K	125	A	A
(Web)	(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)
Item Description :	C2012	X7R	1E	105	K	T	xxxx	
	(1)	(2)	(3)	(4)	(5)	(9)	(10)	

(1) Type



Please refer to product list for the dimension of each product.

(2) Temperature Characteristics (Details are shown in table 1 No.7 and No.8 at page 5)

(3) Rated Voltage

Symbol	Rated Voltage
2 J	DC 630 V
2 W	DC 450 V
2 V	DC 350 V
2 E	DC 250 V
2 A	DC 100 V
1 H	DC 50 V
1 V	DC 35 V
1 E	DC 25 V
1 C	DC 16 V
1 A	DC 10 V
0 J	DC 6.3 V
0 G	DC 4 V

(4) Rated Capacitance

Stated in three digits and in units of pico farads (pF).
The first and Second digits identify the first and second significant figures of the capacitance, the third digit identifies the multiplier.
R is designated for a decimal point.

Example 2R2 → 2.2pF
105 → 1,000,000pF

(5) Capacitance tolerance

Symbol	Tolerance	Capacitance
B	± 0.1 pF	10pF and under
C	± 0.25 pF	
D	± 0.5 pF	
J	± 5 %	Over 10pF
K	± 10 %	
M	± 20 %	

(6) Thickness code (Only Catalog Number)

(7) Package code (Only Catalog Number)

(8) Special code (Only Catalog Number)

(9) Packaging (Only Item Description)

Symbol	Packaging
B	Bulk
T	Taping

(10) Internal code (Only Item Description)

3. RATED CAPACITANCE AND CAPACITANCE TOLERANCE

3.1 Standard combination of rated capacitance and tolerances

Class	Temperature Characteristics	Capacitance tolerance		Rated capacitance
1	C H C0G	10pF and under	B (±0.1 pF) C (±0.25pF)	0.5, 1, 1.5, 2, 2.2, 3, 3.3, 4, 4.7, 5
			D (±0.5pF)	6, 6.8, 7, 8, 9, 10
		12pF to 10,000pF	J (± 5 %) K (± 10 %)	E – 12 series
		Over 10,000pF		E – 6 series
2	J B X5R X6S X7R X7S X7T	10uF and under	K (± 10 %) M (± 20 %)	E – 6 series
		Over 10uF	M (± 20 %)	

3.2 Capacitance Step in E series

E series	Capacitance Step											
E- 3	1.0				2.2				4.7			
E- 6	1.0		1.5		2.2		3.3		4.7		6.8	
E-12	1.0	1.2	1.5	1.8	2.2	2.7	3.3	3.9	4.7	5.6	6.8	8.2

4. OPERATING TEMPERATURE RANGE

T.C.	Min. operating Temperature	Max. operating Temperature	Reference Temperature
C H J B	-25°C	85°C	20°C
X5R	-55°C	85°C	25°C
X6S	-55°C	105°C	25°C
X7R X7S X7T C0G	-55°C	125°C	25°C

5. STORING CONDITION AND TERM

5 to 40°C at 20 to 70%RH

6 months Max.

6. P.C. BOARD

When mounting on an aluminum substrate, large case sizes such as C3225, C4532 and C5750 types are more likely to be affected by heat stress from the substrate.

Please inquire separate specification for the large case sizes when mounted on the substrate.

7. INDUSTRIAL WASTE DISPOSAL

Dispose this product as industrial waste in accordance with the Industrial Waste Law.

8. PERFORMANCE

table 1

<table>
<tr><th>No.</th><th>Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td>1</td><td>External Appearance</td><td>No defects which may affect performance.</td><td>Inspect with magnifying glass (3×), in case of C0402 and C0603 type, with magnifying glass (10×)</td></tr>
<tr><td>2</td><td>Insulation Resistance</td><td>10,000MΩ or 500MΩ·μF min.
(As for the capacitors of rated voltage 16, 10V DC and lower, 10,000 MΩ or 100MΩ·μF min.,) whichever smaller.</td><td>Apply rated voltage for 60s.</td></tr>
<tr><td>3</td><td>Voltage Proof</td><td>Withstand test voltage without insulation breakdown or other damage.</td><td>
<table>
<tr><th>Class</th><th>Rated voltage</th><th>Apply voltage</th></tr>
<tr><td rowspan="3">Class1</td><td>100V and under</td><td>3 × rated voltage</td></tr>
<tr><td>Over 100V
500V and under</td><td>1.5 × rated voltage</td></tr>
<tr><td>Over 500V</td><td>1.3 × rated voltage</td></tr>
<tr><td rowspan="3">Class2</td><td>100V and under</td><td>2.5 × rated voltage</td></tr>
<tr><td>Over 100V
500V and under</td><td>1.5 × rated voltage</td></tr>
<tr><td>Over 500V</td><td>1.3 × rated voltage</td></tr>
</table>
Above DC voltage shall be applied for 1s.
Charge / discharge current shall not exceed 50mA.</td></tr>
<tr><td>4</td><td>Capacitance</td><td>Within the specified tolerance.</td><td>
<table>
<tr><th>Class</th><th>Rated Capacitance</th><th>Measuring frequency</th><th>Measuring voltage</th></tr>
<tr><td rowspan="2">Class1</td><td>1000pF and under</td><td>1MHz±10%</td><td rowspan="2">0.5 - 5 Vrms.</td></tr>
<tr><td>Over 1000pF</td><td>1kHz±10%</td></tr>
<tr><td rowspan="3">Class2</td><td rowspan="2">10uF and under</td><td rowspan="2">1kHz±10%</td><td>0.5±0.2Vrms.</td></tr>
<tr><td>1.0±0.2Vrms.</td></tr>
<tr><td>Over 10uF</td><td>120Hz±20%</td><td>0.5±0.2Vrms.</td></tr>
</table>
For information which product has which measuring voltage, please contact with our sales representative.</td></tr>
<tr><td>5</td><td>Q
(Class1)</td><td>
<table>
<tr><th>Rated Capacitance</th><th>Q</th></tr>
<tr><td>30pF and over</td><td>1,000 min.</td></tr>
<tr><td>Under 30pF</td><td>400+20×C min.</td></tr>
</table>
C : Rated capacitance (pF)</td><td>See No.4 in this table for measuring condition.</td></tr>
<tr><td>6</td><td>Dissipation Factor
(Class2)</td><td>
<table>
<tr><th>T.C.</th><th>D.F.</th></tr>
<tr><td>J B</td><td>0.025 max.</td></tr>
<tr><td>X5R</td><td>0.03 max.</td></tr>
<tr><td>X6S</td><td>0.05 max.</td></tr>
<tr><td>X7R</td><td>0.075 max.</td></tr>
<tr><td>X7S</td><td>0.10 max.</td></tr>
<tr><td>X7T</td><td>0.15 max.</td></tr>
</table></td><td>See No.4 in this table for measuring condition.



For information which product has which Dissipation Factor, please contact with our sales representative.</td></tr>
</table>

(continued)

<table>
<tr><th>No.</th><th>Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td>7</td><td>Temperature Characteristics of Capacitance (Class1)</td><td>
<table>
<tr><th>T.C.</th><th>Temperature Coefficient (ppm/°C)</th></tr>
<tr><td>C H</td><td>0 ± 60</td></tr>
<tr><td>C0G</td><td>0 ± 30</td></tr>
</table>
Capacitance drift
Within ± 0.2% or ±0.05pF, whichever larger.
</td><td>Temperature coefficient shall be calculated based on values at 25°C and 85°C temperature.


Measuring temperature below 20°C shall be -10°C and -25°C.</td></tr>
<tr><td>8</td><td>Temperature Characteristics of Capacitance (Class2)</td><td>
Capacitance Change (%)
<table>
<tr><th>No voltage applied</th><th>With voltage applied</th></tr>
<tr><td>J B : ±10

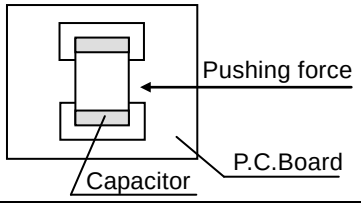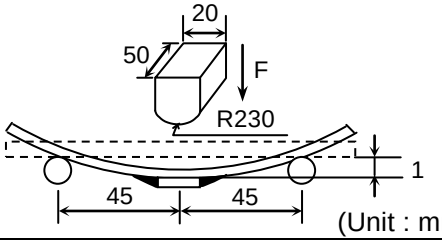X5R : ±15
X6S : ±22
X7R : ±15
X7S : ±22
X7T : +22
-33</td><td>J B : + 10
− 30
: + 10
− 50
: + 10
− 60
: ——

——</td></tr>
</table>
</td><td>Capacitance shall be measured by the steps shown in the following table after thermal equilibrium is obtained for each step.
ΔC be calculated ref. STEP3 reading
<table>
<tr><th>Step</th><th>Temperature(°C)</th></tr>
<tr><td>1</td><td>Reference temp. ± 2</td></tr>
<tr><td>2</td><td>Min. operating temp. ± 2</td></tr>
<tr><td>3</td><td>Reference temp. ± 2</td></tr>
<tr><td>4</td><td>Max. operating temp. ± 2</td></tr>
</table>
Measuring voltage: 0.1, 0.2, 0.5, 1.0Vrms.
For information which product has which applied voltage, please contact with our sales representative.</td></tr>
<tr><td>9</td><td>Robustness of Terminations</td><td>No sign of termination coming off, breakage of ceramic, or other abnormal signs.</td><td>Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b and apply a pushing force of 2N (C0603, C1005) or 5N (C1608, C2012, C3216, C3225, C4532, C5750) with 10±1s.
(Not applicable to C0402.)

</td></tr>
<tr><td>10</td><td>Bending</td><td>No mechanical damage.</td><td>Reflow solder the capacitors on a P.C.Board shown in Appendix 2a or Appendix 2b and bend it for 1mm.


(Unit : mm)</td></tr>
</table>

(continued)

No.	Item	Performance	Test or inspection method
11	Solderability	(C0402) Both end faces and the contact areas shall be covered with a smooth and bright solder coating with no more than a small amount of scattered imperfections such as pinholes or un-wetted or de-wetted areas. These imperfections shall not be concentrated in one area. (Others) New solder to cover over 75% of termination. 25% may have pin holes or rough spots but not concentrated in one spot. Ceramic surface of A sections shall not be exposed due to melting or shifting of termination material.  	Completely soak both terminations in solder at 235±5°C for 2 ± 0.5s. Solder : H63A (JIS Z 3282) Flux: Isopropyl alcohol (JIS K 8839) Rosin (JIS K 5902) 25% solid solution. Only reflow soldering applicable to C0402. Peak condition Temp. : 235±5°C Time: 2±0.5s. Preheating condition Temp. : 150±10°C Time: 1 to 2min.

(continued)

<table>
<tr><th>No.</th><th colspan="2">Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td rowspan="7">12</td><td rowspan="7">Resistance to solder heat</td><td>External appearance</td><td>No cracks are allowed and terminations shall be covered at least 60% with new solder.</td><td rowspan="7">Completely soak both terminations in solder at 260±5°C for 5±1s.

Preheating condition
Temp. : 150±10°C
Time: 1 to 2min.

Solder : H63A (JIS Z 3282)

Flux : Isopropyl alcohol (JIS K 8839)
Rosin (JIS K 5902) 25% solid solution.

Leave the capacitors in ambient condition for 6 to 24h (Class1) or 24±2h (Class2) before measurement.

Only reflow soldering applicable to C0402.
Peak condition
Temp. : 235±5°C
Time: 2±0.5s.
Preheating condition
Temp. : 150±10°C
Time : 1 to 2min.</td></tr>
<tr><td>Capacitance</td><td><table><tr><th colspan="2">Characteristics</th><th>Change from the value before test</th></tr><tr><td>Class 1</td><td>C H
C0G</td><td>Capacitance drift within ±2.5% or ±0.25pF, whichever larger.</td></tr><tr><td rowspan="6">Class 2</td><td>J B</td><td>± 7.5 %</td></tr><tr><td>X5R</td><td>± 7.5 %</td></tr><tr><td>X6S</td><td>± 7.5 %</td></tr><tr><td>X7R</td><td>± 7.5 %</td></tr><tr><td>X7S</td><td>± 7.5 %</td></tr><tr><td>X7T</td><td>± 7.5 %</td></tr></table></td></tr>
<tr><td>Q
(Class1)</td><td><table><tr><th>Rated Capacitance</th><th>Q</th></tr><tr><td>30pF and over</td><td>1,000 min.</td></tr><tr><td>Under 30pF</td><td>400+20×C min.</td></tr></table>C : Rated capacitance (pF)</td></tr>
<tr><td>D.F.
(Class2)</td><td>Meet the initial spec.</td></tr>
<tr><td>Insulation Resistance</td><td>Meet the initial spec.</td></tr>
<tr><td>Voltage proof</td><td>No insulation breakdown or other damage.</td></tr>
<tr><td rowspan="4">13</td><td rowspan="4">Vibration</td><td>External appearance</td><td>No mechanical damage.</td><td rowspan="4">Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.

Vibrate the capacitors with amplitude of 1.5mm P-P changing the frequencies from 10Hz to 55Hz and back to 10Hz in about 1min.
Repeat this for 2h each in 3 perpendicular directions.</td></tr>
<tr><td>Capacitance</td><td><table><tr><th colspan="2">Characteristics</th><th>Change from the value before test</th></tr><tr><td>Class1</td><td>C H
C0G</td><td>±2.5% or ±0.25pF, whichever larger.</td></tr><tr><td rowspan="6">Class2</td><td>J B</td><td>± 7.5 %</td></tr><tr><td>X5R</td><td>± 7.5 %</td></tr><tr><td>X6S</td><td>± 7.5 %</td></tr><tr><td>X7R</td><td>± 7.5 %</td></tr><tr><td>X7S</td><td>± 7.5 %</td></tr><tr><td>X7T</td><td>± 7.5 %</td></tr></table></td></tr>
<tr><td>Q
(Class1)</td><td><table><tr><th>Rated Capacitance</th><th>Q</th></tr><tr><td>30pF and over</td><td>1,000 min.</td></tr><tr><td>Under 30pF</td><td>400+20×C min.</td></tr></table>C : Rated capacitance (pF)</td></tr>
<tr><td>D.F.
(Class2)</td><td>Meet the initial spec.</td></tr>
</table>

(continued)

<table>
<tr><th>No.</th><th colspan="2">Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td rowspan="6">14</td><td rowspan="6">Temperature cycle</td><td>External appearance</td><td>No mechanical damage.</td><td rowspan="6">Reflow solder the capacitors on a P.C.Board shown in Appendix1a or Appendix1b before testing.

Expose the capacitors in the condition step1 through step 4 and repeat 5 times consecutively.

Leave the capacitors in ambient condition for 6 to 24h (Class 1) or 24±2h (Class 2) before measurement.

<table><tr><th>Step</th><th>Temperature(°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>Min. operating temp. ± 3</td><td>30 ± 3</td></tr><tr><td>2</td><td>Reference Temp.</td><td>2 - 5</td></tr><tr><td>3</td><td>Max. operating temp. ± 2</td><td>30 ± 2</td></tr><tr><td>4</td><td>Reference Temp.</td><td>2 - 5</td></tr></table></td></tr>
<tr><td>Capacitance</td><td><table><tr><th colspan="2">Characteristics</th><th>Change from the value before test</th></tr><tr><td>Class1</td><td>C H C0G</td><td>±2.5% or ±0.25pF, whichever larger.</td></tr><tr><td>*Class2</td><td>J B X5R X6S X7R X7S X7T</td><td>± 7.5 %
± 10 %
± 12.5 %</td></tr></table>* Applied for some parts.</td></tr>
<tr><td>Q (Class1)</td><td><table><tr><th>Rated Capacitance</th><th>Q</th></tr><tr><td>30pF and over</td><td>1,000 min.</td></tr><tr><td>Under 30pF</td><td>400+20×C min.</td></tr></table>C : Rated capacitance (pF)</td></tr>
<tr><td>D.F. (Class2)</td><td>Meet the initial spec.</td></tr>
<tr><td>Insulation Resistance</td><td>Meet the initial spec.</td></tr>
<tr><td>Voltage proof</td><td>No insulation breakdown or other damage.</td></tr>
</table>

(continued)

<table>
<tr><th>No.</th><th colspan="2">Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td rowspan="5">15</td><td rowspan="5">Moisture Resistance (Steady State)</td><td>External appearance</td><td>No mechanical damage.</td><td rowspan="5">Reflow solder the capacitors on a P.C.Board shown in Appendix 1a or Appendix 1b before testing.

Leave at temperature 40 ± 2°C, 90 to 95%RH for 500 +24,0h.

Leave the capacitors in ambient condition for 6 to 24h (Class1) or 24 ± 2h (Class2) before measurement.</td></tr>
<tr><td>Capacitance</td><td>
<table>
<tr><th colspan="2">Characteristics</th><th>Change from the value before test</th></tr>
<tr><td>Class1</td><td>C H
C0G</td><td>±5% or ±0.5pF, whichever larger.</td></tr>
<tr><td>*Class2</td><td>J B
X5R
X6S
X7R
X7S
X7T</td><td>± 10 %
± 12.5 %
± 25 %</td></tr>
</table>
* Applied for some parts.
</td></tr>
<tr><td>Q
(Class1)</td><td>
<table>
<tr><th>Rated Capacitance</th><th>Q</th></tr>
<tr><td>30pF and over</td><td>350 min.</td></tr>
<tr><td>10pF and over under 30pF</td><td>275+5/2×C min.</td></tr>
<tr><td>Under 10pF</td><td>200+10×C min.</td></tr>
</table>
C : Rated capacitance (pF)
</td></tr>
<tr><td>D.F.
(Class2)</td><td>200% of initial spec. max.</td></tr>
<tr><td>Insulation Resistance</td><td>1,000MΩ or 50MΩ·μF min.
(As for the capacitors of rated voltage 16, 10V DC and lower, 1,000 MΩ or 10MΩ·μF min.,) whichever smaller.</td></tr>
</table>

(continued)

<table>
<tr><th>No.</th><th colspan="2">Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td rowspan="5">16</td><td rowspan="5">Moisture Resistance</td><td>External appearance</td><td>No mechanical damage.</td><td rowspan="5">Reflow solder the capacitors on a P.C.Board shown in Appendix1a or Appendix 1b before testing.
Apply the rated voltage at temperature 40±2°C and 90 to 95%RH for 500 +24,0h.
Charge/discharge current shall not exceed 50mA.
Leave the capacitors in ambient condition for 6 to 24h (Class1) or 24±2h (Class2) before measurement.
Voltage conditioning (only for class 2) Voltage treat the capacitors under testing temperature and voltage for 1 hour.
Leave the capacitors in ambient condition for 24±2h before measurement.
Use this measurement for initial value.</td></tr>
<tr><td>Capacitance</td><td><table><tr><th colspan="2">Characteristics</th><th>Change from the value before test</th></tr><tr><td>Class1</td><td>C H
C0G</td><td>±7.5% or ±0.75pF, whichever larger.</td></tr><tr><td>*Class2</td><td>J B
X5R
X6S
X7R
X7S
X7T</td><td>± 10 %
± 12.5 %
± 25 %</td></tr></table>* Applied for some parts.</td></tr>
<tr><td>Q
(Class1)</td><td><table><tr><th>Rated Capacitance</th><th>Q</th></tr><tr><td>30pF and over</td><td>200 min.</td></tr><tr><td>Under 30pF</td><td>100+10/3×C min.</td></tr></table>C : Rated capacitance (pF)</td></tr>
<tr><td>D.F.
(Class2)</td><td>200% of initial spec. max.</td></tr>
<tr><td>Insulation Resistance</td><td>500MΩ or 25MΩ·μF min.
(As for the capacitors of rated voltage 16, 10V DC and lower, 500 MΩ or 5MΩ·μF min.,) whichever smaller.</td></tr>
</table>

(continued)


<table>
<tr><th>No.</th><th colspan="2">Item</th><th>Performance</th><th>Test or inspection method</th></tr>
<tr><td rowspan="5">17</td><td rowspan="5">Life</td><td>External appearance</td><td>No mechanical damage.</td><td rowspan="5">Reflow solder the capacitors on a P.C.Board shown in Appendix1a or Appendix 1b before testing.
Below the voltage shall be applied at maximum operating temperature ±2°C for 1,000 +48, 0h.
<table><tr><th>Applied voltage</th></tr><tr><td>Rated voltage x2</td></tr><tr><td>Rated voltage x1.5</td></tr><tr><td>Rated voltage x1.2</td></tr><tr><td>Rated voltage x1</td></tr></table>
For information which product has which applied voltage, please contact with our sales representative.
Charge/discharge current shall not exceed 50mA.
Leave the capacitors in ambient condition for 6 to 24h (Class1) or 24±2h (Class2) before measurement.
Voltage conditioning (only for class 2)
Voltage treat the capacitors under testing temperature and voltage for 1 hour.
Leave the capacitors in ambient condition for 24±2h before measurement.
Use this measurement for initial value.</td></tr>
<tr><td>Capacitance</td><td><table><tr><th colspan="2">Characteristics</th><th>Change from the value before test</th></tr><tr><td>Class1</td><td>C H
C0G</td><td>±3% or ±0.3pF, whichever larger.</td></tr><tr><td>*Class2</td><td>J B
X5R
X6S
X7R
X7S
X7T</td><td>± 10 %
± 12.5 %
± 25 %</td></tr></table>* Applied for some parts.</td></tr>
<tr><td>Q
(Class1)</td><td><table><tr><th>Rated Capacitance</th><th>Q</th></tr><tr><td>30pF and over</td><td>350 min.</td></tr><tr><td>10pF and over under 30pF</td><td>275+5/2×C min.</td></tr><tr><td>Under 10pF</td><td>200+10×C min.</td></tr></table>C : Rated capacitance (pF)</td></tr>
<tr><td>D.F.
(Class2)</td><td>200% of initial spec. max.</td></tr>
<tr><td>Insulation Resistance</td><td>1,000MΩ or 50MΩ·μF min.
(As for the capacitors of rated voltage 16, 10V DC and lower, 1,000 MΩ or 10MΩ·μF min.,) whichever smaller.</td></tr>
</table>

*As for the initial measurement of capacitors (Class2) on number 8,12,13,14 and 15, leave capacitors at 150 -10,0°C for 1 hour and measure the value after leaving capacitors for 24 ± 2h in ambient condition.

Appendix - 1a

P.C. Board for reliability test

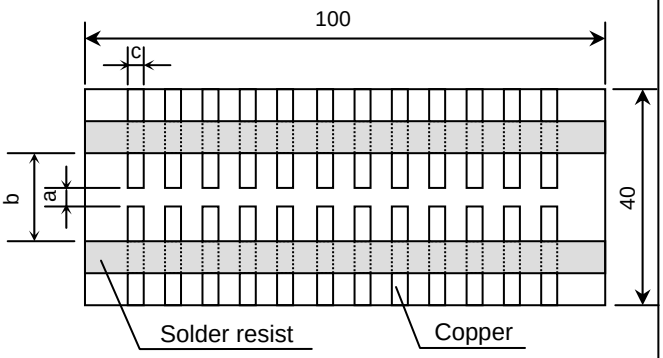Applied for C0402, C0603, C1005, C1608, C2012, C3216




(Unit : mm)

Appendix - 1b

P.C. Board for reliability test

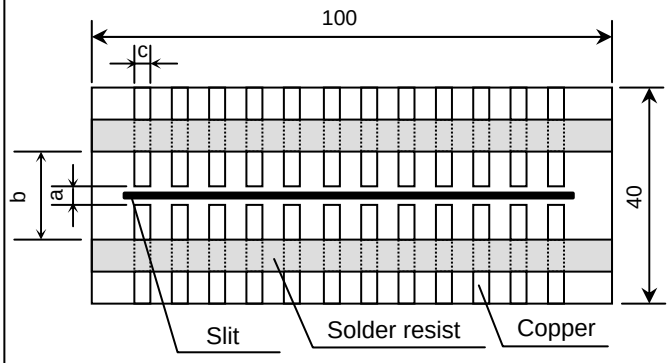Applied for C3225, C4532, C5750




(Unit : mm)

Appendix - 2a

P.C. Board for bending test

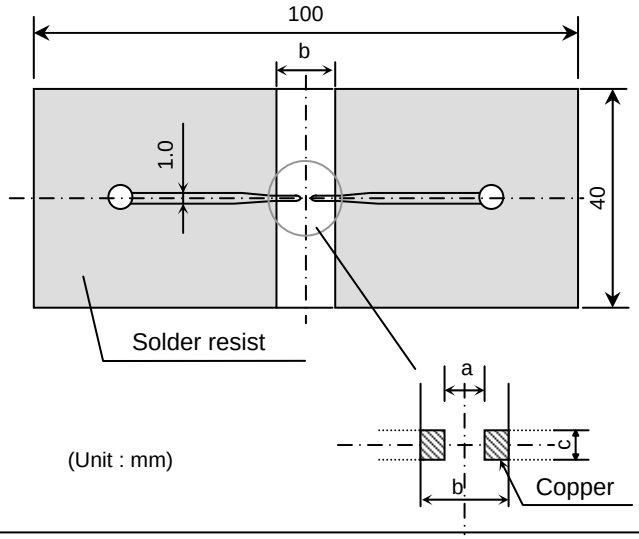Applied for C0402, C0603, C1005




(Unit : mm)

Appendix - 2b

P.C. Board for bending test

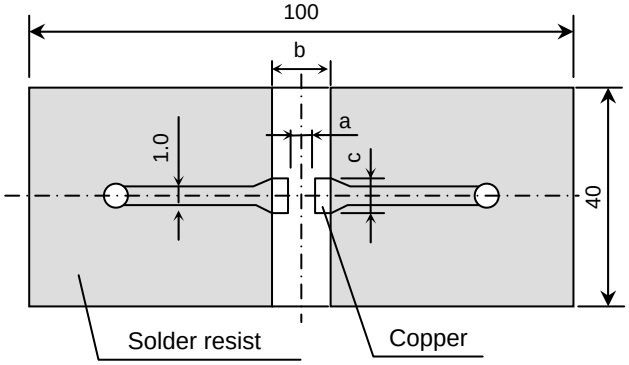Applied for C1608, C2012, C3216, C3225, C4532, C5750



(Unit : mm)

Material : Glass Epoxy (As per JIS C6484 GE4)

P.C. Board thickness : Appendix-2a 0.8mm


Appendix-1a, 1b, 2b 1.6mm

Copper (thickness 0.035mm)

Solder resist

TDK (EIA style)	Dimensions (mm)		
	a	b	c
C0402 (CC01005)	0.2	0.8	0.2
C0603 (CC0201)	0.3	0.8	0.3
C1005 (CC0402)	0.4	1.5	0.5
C1608 (CC0603)	1.0	3.0	1.2
C2012 (CC0805)	1.2	4.0	1.65
C3216 (CC1206)	2.2	5.0	2.0
C3225 (CC1210)	2.2	5.0	2.9
C4532 (CC1812)	3.5	7.0	3.7
C5750 (CC2220)	4.5	8.0	5.6

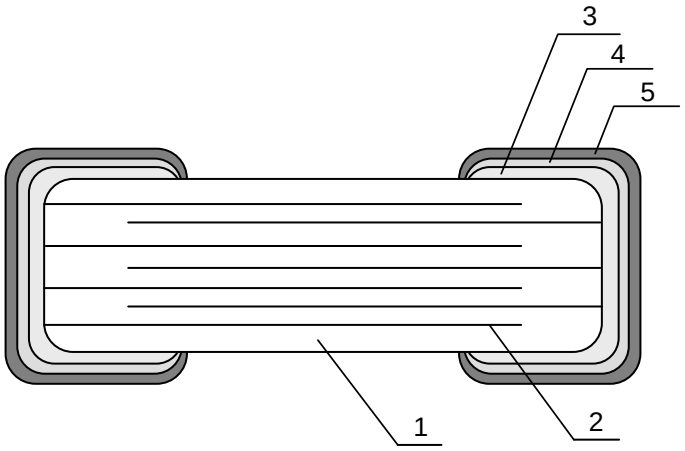9. INSIDE STRUCTURE AND MATERIAL



No.	NAME	MATERIAL	
		Class1	Class2
1	Dielectric	$CaZrO_3$	$BaTiO_3$
2	Electrode	Nickel (Ni)	
3	Termination	Copper (Cu)	
4		Nickel (Ni)	
5		Tin (Sn)	






10. RECOMMENDATION

As for C3225, C4532 and C5750 types, It is recommended to provide a slit (about 1mm wide) in the board under the components to improve washing Flux. And please make sure to dry detergent up completely before.


11. SOLDERING CONDITION

As for C0402, C0603, C1005, C3225, C4532 and C5750 types, reflow soldering only.







12. Caution

<table>
<tr><th>No.</th><th>Process</th><th>Condition</th></tr>
<tr><td>1</td><td>Operating Condition (Storage, Transportation)</td><td>1-1. Storage
1) The capacitors must be stored in an ambient temperature of 5 to 40°C with a relative humidity of 20 to 70%RH. The products should be used within 6 months upon receipt.
2) The capacitors must be operated and stored in an environment free of dew condensation and these gases such as Hydrogen Sulphide, Hydrogen Sulphate, Chlorine, Ammonia and sulfur.
3) Avoid storing in sun light and falling of dew.
4) Do not use capacitors under high humidity and high and low atmospheric pressure which may affect capacitors reliability.
5) Capacitors should be tested for the solderability when they are stored for long time.
1-2. Handling in transportation
In case of the transportation of the capacitors, the performance of the capacitors may be deteriorated depending on the transportation condition.
(Refer to JEITA RCR-2335B 9.2 Handling in transportation)</td></tr>
<tr><td>2</td><td>Circuit design
⚠ Caution</td><td>2-1. Operating temperature
Operating temperature should be followed strictly within this specification, especially be careful with maximum temperature.
1) Do not use capacitors above the maximum allowable operating temperature.
2) Surface temperature including self heating should be below maximum operating temperature.
(Due to dielectric loss, capacitors will heat itself when AC is applied. Especially at high frequencies around its SRF, the heat might be so extreme that it may damage itself or the product mounted on. Please design the circuit so that the maximum temperature of the capacitors including the self heating to be below the maximum allowable operating temperature. Temperature rise at capacitor surface shall be below 20°C)
3) The electrical characteristics of the capacitors will vary depending on the temperature. The capacitors should be selected and designed in taking the temperature into consideration.
2-2. Operating voltage
1) Operating voltage across the terminals should be below the rated voltage.
When AC and DC are super imposed, $V_{0\text{-}P}$ must be below the rated voltage.
— (1) and (2)
AC or pulse with overshooting, $V_{P\text{-}P}$ must be below the rated voltage.
— (3), (4) and (5)
When the voltage is started to apply to the circuit or it is stopped applying, the irregular voltage may be generated for a transit period because of resonance or switching. Be sure to use the capacitors within rated voltage containing these Irregular voltage.
<table><tr><td>Voltage</td><td>(1) DC voltage</td><td>(2) DC+AC voltage</td><td>(3) AC voltage</td></tr><tr><td>Positional Measurement (Rated voltage)</td><td></td><td></td><td></td></tr></table>
<table><tr><td>Voltage</td><td>(4) Pulse voltage (A)</td><td>(5) Pulse voltage (B)</td></tr><tr><td>Positional Measurement (Rated voltage)</td><td></td><td></td></tr></table></td></tr>
</table>


<table>
<tr><th>No.</th><th>Process</th><th>Condition</th></tr>
<tr><td>2</td><td>Circuit design
⚠ Caution</td><td>2) Even below the rated voltage, if repetitive high frequency AC or pulse is applied, the reliability of the capacitors may be reduced.
3) The effective capacitance will vary depending on applied DC and AC voltages. The capacitors should be selected and designed in taking the voltages into consideration.

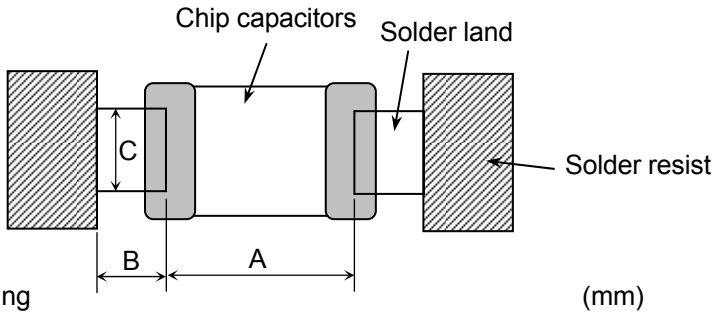2-3. Frequency
When the capacitors (Class 2) are used in AC and/or pulse voltages, the capacitors may vibrate themselves and generate audible sound.</td></tr>
<tr><td>3</td><td>Designing
P.C.board</td><td>The amount of solder at the terminations has a direct effect on the reliability of the capacitors.
1) The greater the amount of solder, the higher the stress on the chip capacitors, and the more likely that it will break. When designing a P.C.board, determine the shape and size of the solder lands to have proper amount of solder on the terminations.
2) Avoid using common solder land for multiple terminations and provide individual solder land for each terminations.
3) Size and recommended land dimensions.


Flow soldering (mm)
<table>
<tr><th>Symbol \ Type</th><th>C1608 (CC0603)</th><th>C2012 (CC0805)</th><th>C3216 (CC1206)</th></tr>
<tr><td>A</td><td>0.7 - 1.0</td><td>1.0 - 1.3</td><td>2.1 - 2.5</td></tr>
<tr><td>B</td><td>0.8 - 1.0</td><td>1.0 - 1.2</td><td>1.1 - 1.3</td></tr>
<tr><td>C</td><td>0.6 - 0.8</td><td>0.8 - 1.1</td><td>1.0 - 1.3</td></tr>
</table>
Reflow soldering (mm)
<table>
<tr><th>Symbol \ Type</th><th>C0402 (CC01005)</th><th>C0603 (CC0201)</th><th>C1005 (CC0402)</th><th>C1608 (CC0603)</th><th>C2012 (CC0805)</th></tr>
<tr><td>A</td><td>0.15 - 0.25</td><td>0.25 - 0.35</td><td>0.3 - 0.5</td><td>0.6 - 0.8</td><td>0.9 - 1.2</td></tr>
<tr><td>B</td><td>0.15 - 0.25</td><td>0.2 - 0.3</td><td>0.35 - 0.45</td><td>0.6 - 0.8</td><td>0.7 - 0.9</td></tr>
<tr><td>C</td><td>0.15 - 0.25</td><td>0.25 - 0.35</td><td>0.4 - 0.6</td><td>0.6 - 0.8</td><td>0.9 - 1.2</td></tr>
</table>
<table>
<tr><th>Symbol \ Type</th><th>C3216 (CC1206)</th><th>C3225 (CC1210)</th><th>C4532 (CC1812)</th><th>C5750 (CC2220)</th></tr>
<tr><td>A</td><td>2.0 - 2.4</td><td>2.0 - 2.4</td><td>3.1 - 3.7</td><td>4.1 - 4.8</td></tr>
<tr><td>B</td><td>1.0 - 1.2</td><td>1.0 - 1.2</td><td>1.2 - 1.4</td><td>1.2 - 1.4</td></tr>
<tr><td>C</td><td>1.1 - 1.6</td><td>1.9 - 2.5</td><td>2.4 - 3.2</td><td>4.0 - 5.0</td></tr>
</table></td></tr>
</table>


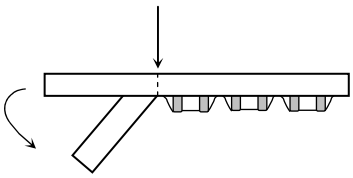




<table>
<tr><th>No.</th><th>Process</th><th>Condition</th></tr>
<tr><td>3</td><td>Designing
P.C.board</td><td>4) Recommended chip capacitors layout is as following.
<table>
<tr><th></th><th>Disadvantage against bending stress</th><th>Advantage against bending stress</th></tr>
<tr><td>Mounting face</td><td>Perforation or slit

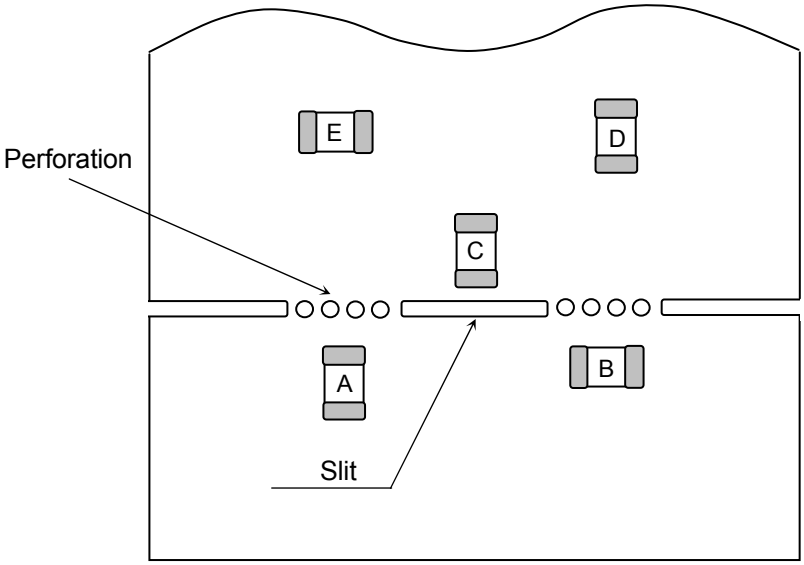Break P.C.board with mounted side up.</td><td>Perforation or slit

Break P.C.board with mounted side down.</td></tr>
<tr><td>Chip arrangement (Direction)</td><td>Mount perpendicularly to perforation or slit
Perforation or slit
</td><td>Mount in parallel with perforation or slit
Perforation or slit
</td></tr>
<tr><td>Distance from slit</td><td>Closer to slit is higher stress

($\ell_1 < \ell_2$)</td><td>Away from slit is less stress

($\ell_1 < \ell_2$)</td></tr>
</table></td></tr>
</table>

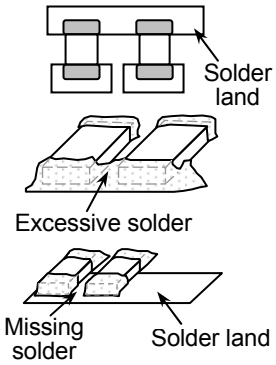No.	Process	Condition
3	Designing P.C.board	5) Mechanical stress varies according to location of chip capacitors on the P.C.board.







The stress in capacitors is in the following order.
A > B = C > D > E

6) Layout recommendation


Example	Use of common solder land	Soldering with chassis	Use of common solder land with other SMD
Need to avoid			
Recommen-dation			

No.	Process	Condition
4	Mounting	4-1. Stress from mounting head If the mounting head is adjusted too low, it may induce excessive stress in the chip capacitors to result in cracking. Please take following precautions. 1) Adjust the bottom dead center of the mounting head to reach on the P.C.board surface and not press it. 2) Adjust the mounting head pressure to be 1 to 3N of static weight. 3) To minimize the impact energy from mounting head, it is important to provide support from the bottom side of the P.C.board. See following examples.

	Not recommended	Recommended
Single sided mounting		
Double-sides mounting		




When the centering jaw is worn out, it may give mechanical impact on the capacitors to cause crack. Please control the close up dimension of the centering jaw and provide sufficient preventive maintenance and replacement of it.

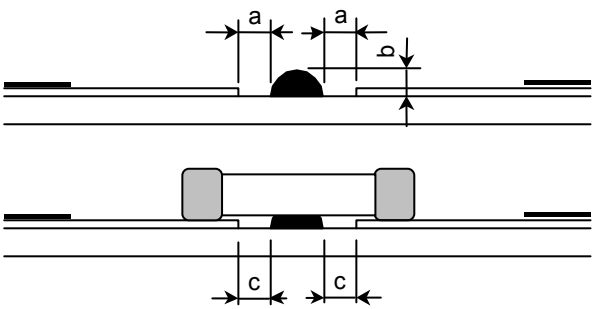4-2. Amount of adhesive



Example : C2012 (CC0805), C3216 (CC1206)

a	0.2mm min.
b	70 - 100μm
c	Do not touch the solder land

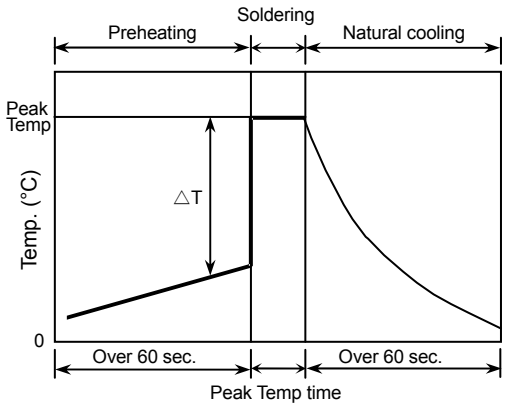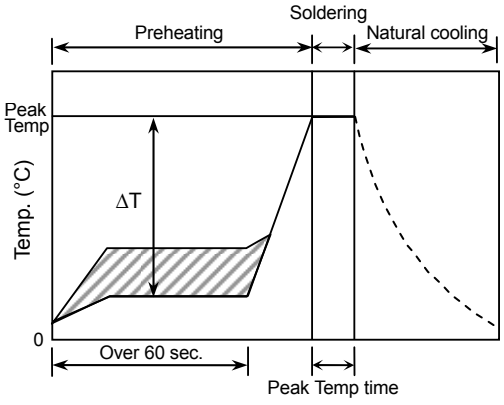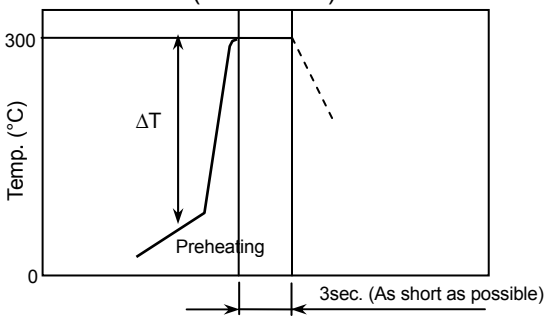No.	Process	Condition
5	Soldering	5-1. Flux selection Although highly-activated flux gives better solderability, substances which increase activity may also degrade the insulation of the chip capacitors. To avoid such degradation, it is recommended following. 1) It is recommended to use a mildly activated rosin flux (less than 0.1wt% chlorine). Strong flux is not recommended. 2) Excessive flux must be avoided. Please provide proper amount of flux. 3) When water-soluble flux is used, enough washing is necessary. 5-2. Recommended soldering profile by various methods Wave soldering  Reflow soldering  Manual soldering (Solder iron)  APPLICATION As for C1608 (CC0603), C2012 (CC0805) and C3216 (CC1206), applied to wave soldering and reflow soldering. As for C0402 (CC01005), C0603 (CC0201), C1005 (CC0402), C3225 (CC1210), C4532 (CC1812), C5750 (CC2220), applied only to reflow soldering. 5-3. Recommended soldering peak temp and peak temp duration

Temp./Duration / Solder	Wave soldering		Reflow soldering	
	Peak temp(°C)	Duration(sec.)	Peak temp(°C)	Duration(sec.)
Sn-Pb Solder	250 max.	3 max.	230 max.	20 max.
Lead Free Solder	260 max.	5 max.	260 max.	10 max.

Recommended solder compositions
Sn-37Pb (Sn-Pb solder)
Sn-3.0Ag-0.5Cu (Lead Free Solder)

No.	Process	Condition
5	Soldering	5-4. Avoiding thermal shock 1) Preheating condition




Soldering	Type	Temp. (°C)
Wave soldering	C1608(CC0603), C2012(CC0805), C3216(CC1206)	ΔT ≤ 150
Reflow soldering	C0402(CC01005),C0603(CC0201), C1005(CC0402), C1608(CC0603), C2012(CC0805), C3216(CC1206)	ΔT ≤ 150
	C3225(CC1210), C4532(CC1812), C5750(CC2220)	ΔT ≤ 130
Manual soldering	C0402(CC01005),C0603(CC0201), C1005(CC0402), C1608(CC0603), C2012(CC0805), C3216(CC1206)	ΔT ≤ 150
	C3225(CC1210), C4532(CC1812), C5750(CC2220)	ΔT ≤ 130

2) Cooling condition

Natural cooling using air is recommended. If the chips are dipped into a solvent for cleaning, the temperature difference (ΔT) must be less than 100°C.

5-5. Amount of solder

Excessive solder will induce higher tensile force in chip capacitors when temperature changes and it may result in chip cracking. In sufficient solder may detach the capacitors from the P.C.board.

Excessive solder		Higher tensile force in chip capacitors to cause crack
Adequate		
Insufficient solder		Low robustness may cause contact failure or chip capacitors come off the P.C.board.

5-6. Solder repair by solder iron

1) Selection of the soldering iron tip





Tip temperature of solder iron varies by its type, P.C.board material and solder land size. The higher the tip temperature, the quicker the operation. However, heat shock may cause a crack in the chip capacitors.


Please make sure the tip temp. before soldering and keep the peak temp and time in accordance with following recommended condition. (Please preheat the chip capacitors with the condition in 5-4 to avoid the thermal shock.)

Recommended solder iron condition (Sn-Pb Solder and Lead Free Solder)

Temp. (°C)	Duration (sec.)	Wattage (W)	Shape (mm)
300 max.	3 max.	20 max.	Ø 3.0 max.

No.	Process	Condition
5	Soldering	2) Direct contact of the soldering iron with ceramic dielectric of chip capacitors may cause crack. Do not touch the ceramic dielectric and the terminations by solder iron. 5-7. Sn-Zn solder Sn-Zn solder affects product reliability. Please contact TDK in advance when utilize Sn-Zn solder. 5-8. Countermeasure for tombstone The misalignment between the mounted positions of the capacitors and the land patterns should be minimized. The tombstone phenomenon may occur especially the capacitors are mounted (in longitudinal direction) in the same direction of the reflow soldering. (Refer to JEITA RCR-2335B Annex 1 (Informative) Recommendations to prevent the tombstone phenomenon)
6	Cleaning	1) If an unsuitable cleaning fluid is used, flux residue or some foreign articles may stick to chip capacitors surface to deteriorate especially the insulation resistance. 2) If cleaning condition is not suitable, it may damage the chip capacitors. 2)-1. Insufficient washing (1) Terminal electrodes may corrode by Halogen in the flux. (2) Halogen in the flux may adhere on the surface of capacitors, and lower the insulation resistance. (3) Water soluble flux has higher tendency to have above mentioned problems (1) and (2). 2)-2. Excessive washing When ultrasonic cleaning is used, excessively high ultrasonic energy output can affect the connection between the ceramic chip capacitor's body and the terminal electrode. To avoid this, following is the recommended condition. Power : 20 W/ℓ max. Frequency : 40 kHz max. Washing time : 5 minutes max. 2)-3. If the cleaning fluid is contaminated, density of Halogen increases, and it may bring the same result as insufficient cleaning.
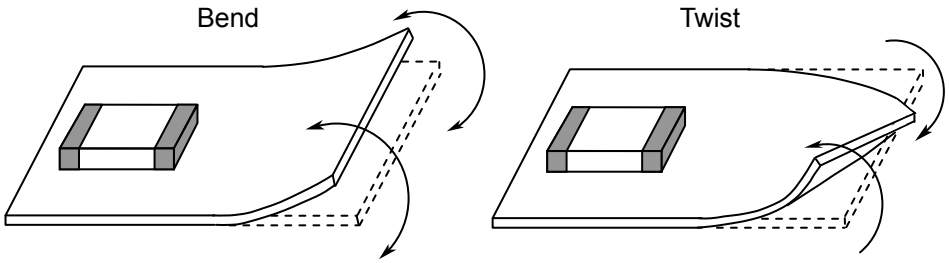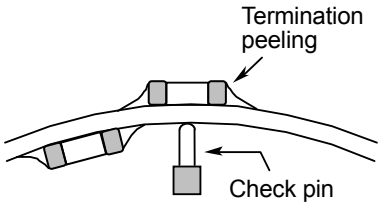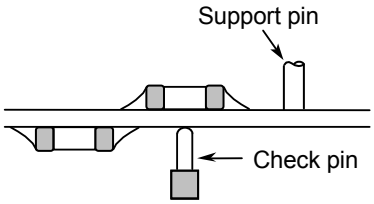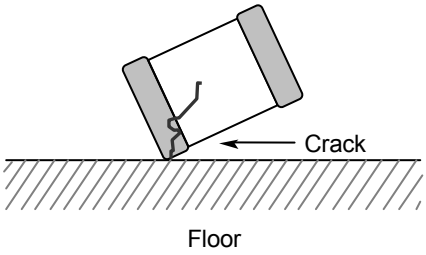
<table>
<tr><th>No.</th><th>Process</th><th>Condition</th></tr>
<tr><td>7</td><td>Coating and molding of the P.C.board</td><td>1) When the P.C.board is coated, please verify the quality influence on the product.
2) Please verify carefully that there is no harmful decomposing or reaction gas emission during curing which may damage the chip capacitors.
3) Please verify the curing temperature.</td></tr>
<tr><td rowspan="2">8</td><td rowspan="2">Handling after chip mounted
⚠ Caution</td><td>1) Please pay attention not to bend or distort the P.C.board after soldering in handling otherwise the chip capacitors may crack.
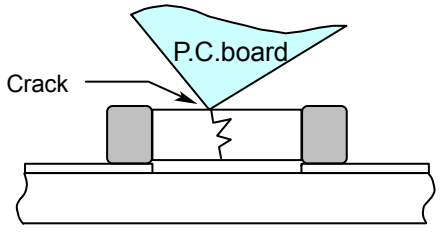
</td></tr>
<tr><td>2) When functional check of the P.C.board is performed, check pin pressure tends to be adjusted higher for fear of loose contact. But if the pressure is excessive and bend the P.C.board, it may crack the chip capacitors or peel the terminations off. Please adjust the check pins not to bend the P.C.board.
<table><tr><th>Item</th><th>Not recommended</th><th>Recommended</th></tr><tr><td>Board bending</td><td>
</td><td>
</td></tr></table></td></tr>
<tr><td>9</td><td>Handling of loose chip capacitors</td><td>1) If dropped the chip capacitors may crack. Once dropped do not use it. Especially, the large case sized chip capacitors are tendency to have cracks easily, so please handle with care.


2) Piling the P.C.board after mounting for storage or handling, the corner of the P.C. board may hit the chip capacitors of another board to cause crack.

</td></tr>
</table>

No.	Process	Condition
10	Capacitance aging	The capacitors (Class 2) have aging in the capacitance. They may not be used in precision time constant circuit. In case of the time constant circuit, the evaluation should be done well.
11	Estimated life and estimated failure rate of capacitors	As per the estimated life and the estimated failure rate depend on the temperature and the voltage. This can be calculated by the equation described in JEITA RCR-2335B Annex 6 (Informative) Calculation of the estimated lifetime and the estimated failure rate (Voltage acceleration coefficient : 3 multiplication rule, Temperature acceleration coefficient : 10°C rule) The failure rate can be decreased by reducing the temperature and the voltage but they will not be guaranteed.
12	Others ⚠ Caution	The products listed on this specification sheet are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property. Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us. (1) Aerospace/Aviation equipment (2) Transportation equipment (cars, electric trains, ships, etc.) (3) Medical equipment (4) Power-generation control equipment (5) Atomic energy-related equipment (6) Seabed equipment (7) Transportation control equipment (8) Public information-processing equipment (9) Military equipment (10) Electric heating apparatus, burning equipment (11) Disaster prevention/crime prevention equipment (12) Safety equipment (13) Other applications that are not considered general-purpose applications When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

13. Packaging label

Packaging shall be done to protect the components from the damage during transportation and storing, and a label which has the following information shall be attached.

1) Inspection No.
2) TDK P/N
3) Customer's P/N
4) Quantity

*Composition of Inspection No.

Example M 2 A – OO – OOO
(a) (b) (c) (d) (e)

a) Line code
b) Last digit of the year
c) Month and A for January and B for February and so on. (Skip I)
d) Inspection Date of the month.
e) Serial No. of the day

14. Bulk packaging quantity

Total number of components in a plastic bag for bulk packaging: 1,000pcs.
As for C0402, C0603 and C1005 types, not available for bulk packaging.

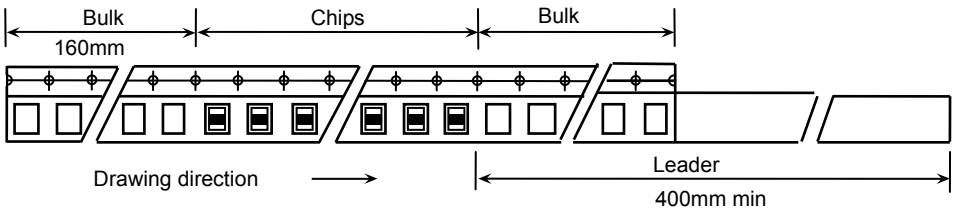
15. TAPE PACKAGING SPECIFICATION

1. CONSTRUCTION AND DIMENSION OF TAPING

1-1. Dimensions of carrier tape

Dimensions of paper tape shall be according to Appendix 3, 4.
Dimensions of plastic tape shall be according to Appendix 5, 6.


1-2. Bulk part and leader of taping




1-3. Dimensions of reel

Dimensions of Ø178 reel shall be according to Appendix 7, 8.
Dimensions of Ø330 reel shall be according to Appendix 9, 10.

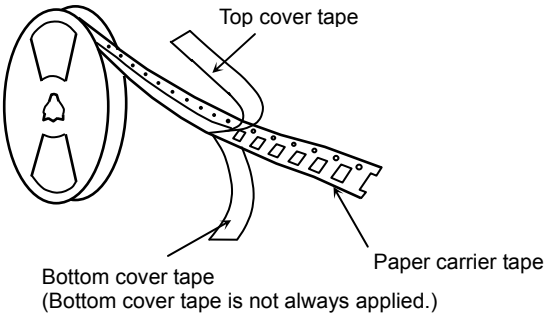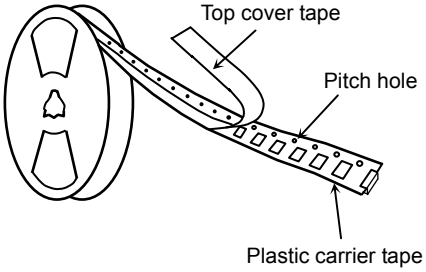1-4. Structure of taping






2. CHIP QUANTITY

Type	Thickness of chip	Taping Material	Chip quantity (pcs.)	
			φ178mm reel	φ330mm reel
C0402	0.20 mm	Paper	20,000	-
C0603	0.30 mm	Paper	15,000	-
C1005	0.50 mm	Paper	10,000	50,000
C1608	0.80 mm	Paper	4,000	10,000
C2012	0.60 mm	Paper	4,000	10,000
	0.85 mm	Paper or Plastic		
	1.25 mm	Plastic	2,000	
C3216	0.60 mm	Paper	4,000	10,000
	0.85 mm	Paper or Plastic		
	1.15 mm	Plastic	2,000	
	1.30 mm			
	1.60 mm			8,000
C3225	1.15 mm	Plastic	2,000	10,000
	1.25 mm		2,000	8,000
	1.30 mm			
	1.60 mm			
	2.00 mm		1,000	5,000
	2.30 mm			
	2.50 mm			
C4532	1.60 mm	Plastic	1,000	3,000
	2.00 mm			
	2.30 mm		500	
	2.50 mm			
	2.80 mm			2,000
	3.20 mm			
C5750	2.00 mm	Plastic	500	3,000
	2.30 mm			
	2.50 mm			
	2.80 mm			2,000

3. PERFORMANCE SPECIFICATIONS

3-1. Fixing peeling strength (top tape)

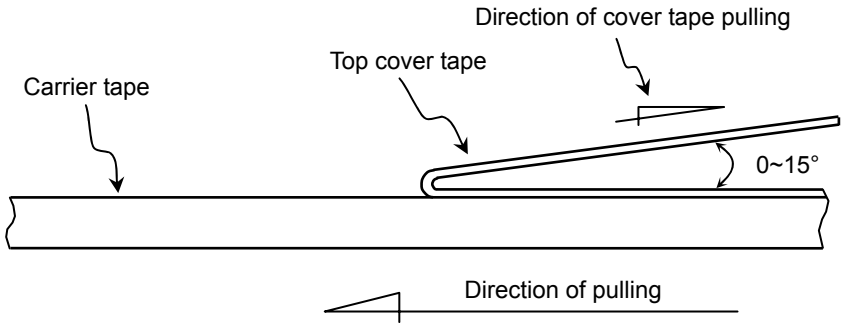0.05-0.7N. (See the following figure.)



3-2. Carrier tape shall be flexible enough to be wound around a minimum radius of 30mm with components in tape.


3-3. The missing of components shall be less than 0.1%

3-4. Components shall not stick to fixing tape.

3-5. The fixing tapes shall not protrude beyond the edges of the carrier tape not shall cover the sprocket holes.

Appendix 3

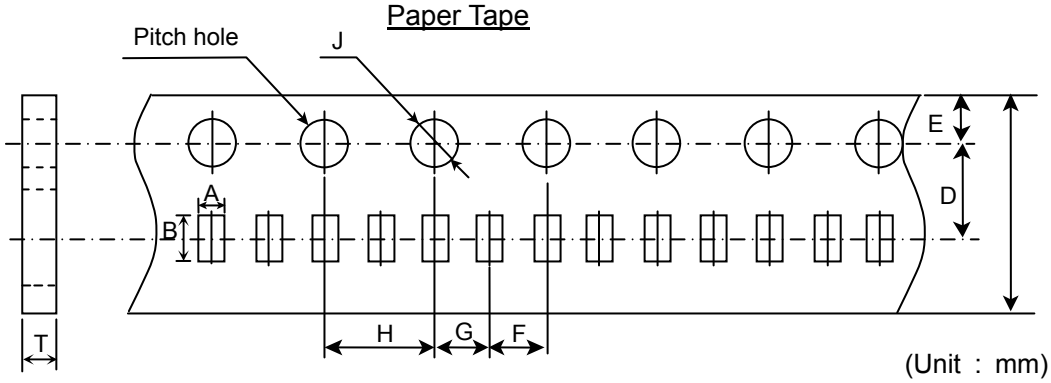Paper Tape



(Unit : mm)


Symbol / Type	A	B	C	D	E	F
C0402 (C01005)	(0.25)	(0.45)	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	2.00 ± 0.05
C0603 (CC0201)	(0.38)	(0.68)				
C1005 (CC0402)	(0.65)	(1.15)				

Symbol / Type	G	H	J	T
C0402 (C01005)	2.00 ± 0.05	4.00 ± 0.10	Ø 1.5 $^{+0.10}_{0}$	0.29 min.
C0603 (CC0201)				0.40 min.
C1005 (CC0402)				0.60±0.15

* The values in the parentheses ( ) are for reference.

Appendix 4

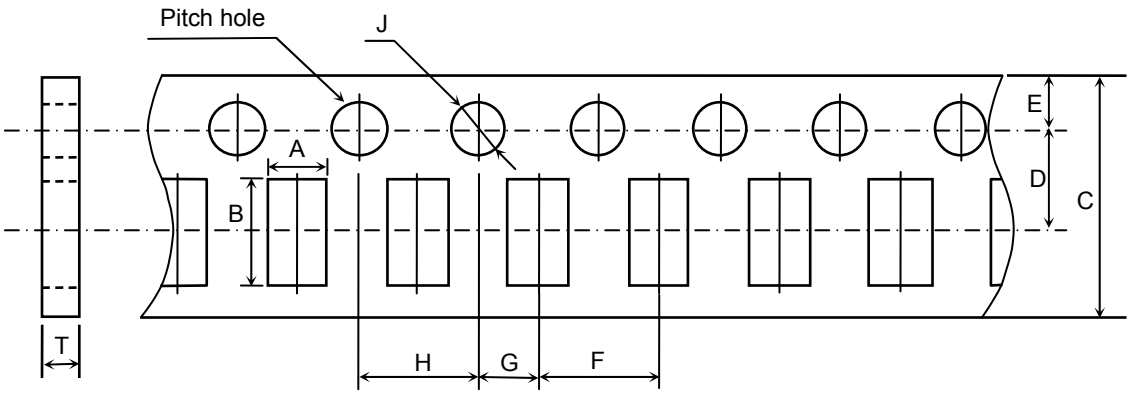Paper Tape



(Unit : mm)


Symbol / Type	A	B	C	D	E	F
C1608 (CC0603)	(1.10)	(1.90)	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10
C2012 (CC0805)	(1.50)	(2.30)				
C3216 (CC1206)	(1.90)	(3.50)				

Symbol / Type	G	H	J	T
C1608 (CC0603)	2.00 ± 0.05	4.00 ± 0.10	Ø 1.5 $^{+0.10}_{0}$	1.10 max.
C2012 (CC0805)				
C3216 (CC1206)				

* The values in the parentheses ( ) are for reference.

Appendix 5

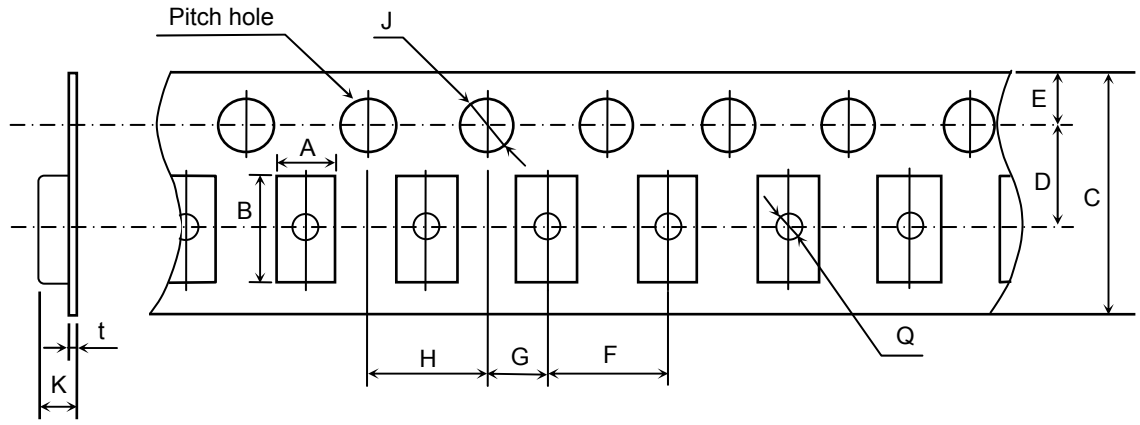Plastic Tape



(Unit : mm)

Symbol / Type	A	B	C	D	E	F
C2012 (CC0805)	(1.50)	(2.30)	8.00 ± 0.30 [12.0 ± 0.30]	3.50 ± 0.05 [5.50 ± 0.05]	1.75 ± 0.10	4.00 ± 0.10
C3216 (CC1206)	(1.90)	(3.50)				
C3225 (CC1210)	(2.90)	(3.60)				


Symbol / Type	G	H	J	K	t	Q
C2012 (CC0805)	2.00 ± 0.05	4.00 ± 0.10	Ø 1.5 +0.10 0	2.50 max.	0.30 max.	Ø 0.50 min.
C3216 (CC1206)						
C3225 (CC1210)				3.20 max.	0.60 max.	

* The values in the parentheses ( ) are for reference.

* As for 2.5mm thickness products, apply values in the brackets [ ].

Appendix 6

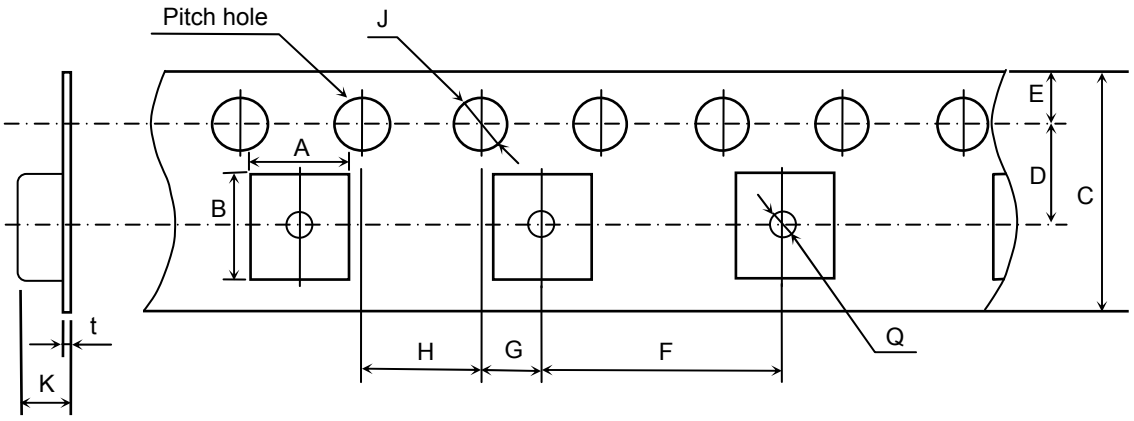Plastic Tape



(Unit : mm)


Symbol / Type	A	B	C	D	E	F
C4532 (CC1812)	(3.60)	(4.90)	12.0 ± 0.30	5.50 ± 0.05	1.75 ± 0.10	8.00 ± 0.10
C5750 (CC2220)	(5.40)	(6.10)				

Symbol / Type	G	H	J	K	t	Q
C4532 (CC1812)	2.00 ± 0.05	4.00 ± 0.10	Ø 1.5 $^{+0.10}_{0}$	6.50 max.	0.60 max.	Ø 1.50 min.
C5750 (CC2220)						

* The values in the parentheses ( ) are for reference.

Appendix 7

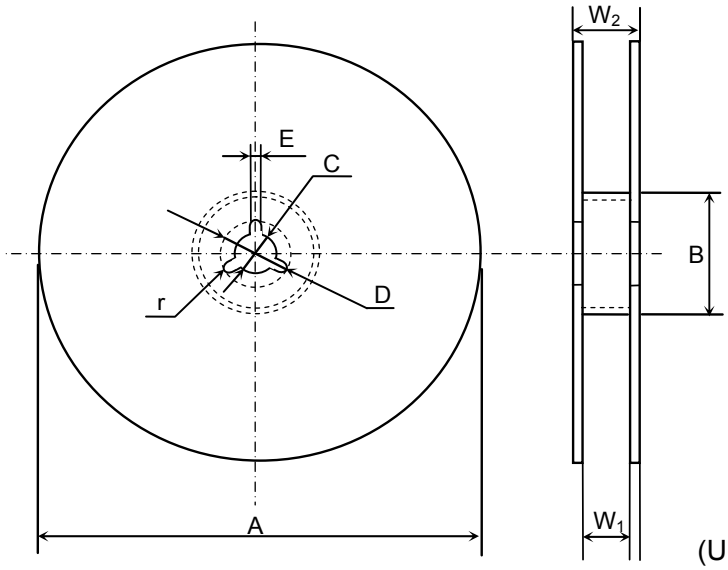C0402, C0603, C1005, C1608, C2012, C3216, C3225
(As for C3225 type, any thickness of the item except 2.5mm)
(Material : Polystyrene)




(Unit : mm)

Symbol	A	B	C	D	E	W_1
Dimension	Ø178 ± 2.0	Ø60 ± 2.0	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	9.0 ± 0.3

Symbol	W_2	r
Dimension	13.0 ± 1.4	1.0

Appendix 8

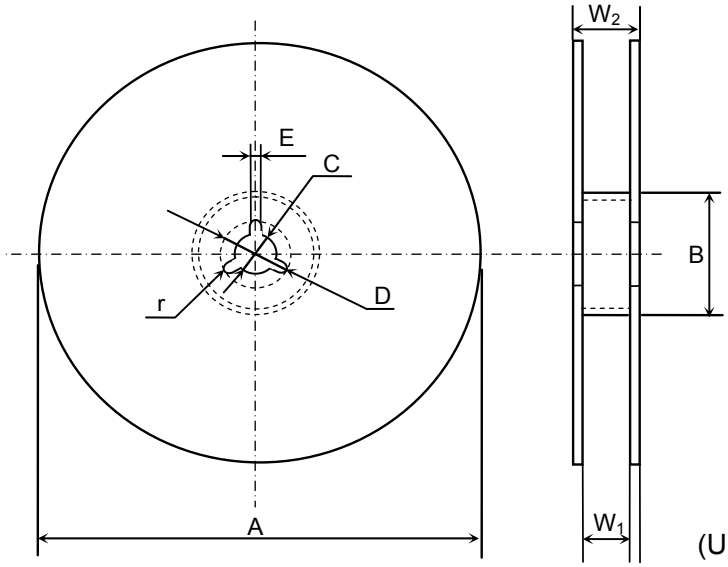C3225, C4532, C5750 (As for C3225 type, applied to 2.5mm thickness products)
(Material : Polystyrene)




(Unit : mm)

Symbol	A	B	C	D	E	W_1
Dimension	Ø178 ± 2.0	Ø60 ± 2.0	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	13.0 ± 0.3

Symbol	W_2	r
Dimension	17.0 ± 1.4	1.0

Appendix 9

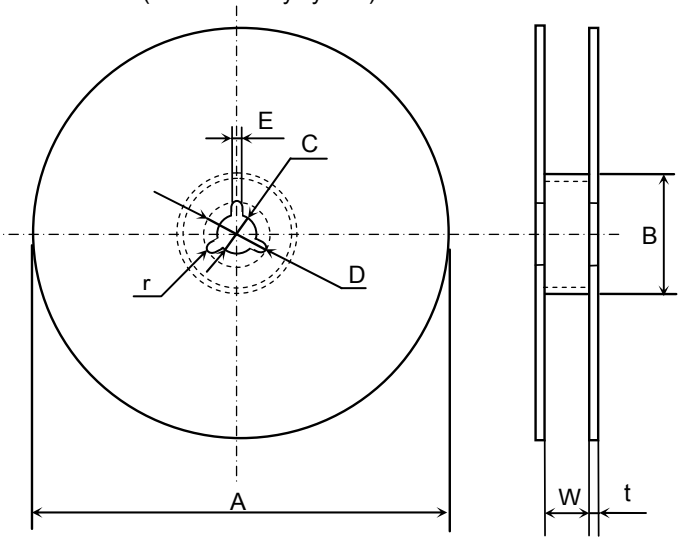C0603, C1005, C1608, C2012, C3216, C3225
(As for C3225 type, any thickness of the item except 2.5mm)
(Material : Polystyrene)




(Unit : mm)

Symbol	A	B	C	D	E	W
Dimension	Ø382 max. (Nominal Ø330)	Ø50 min.	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	10.0 ± 1.5

Symbol	t	r
Dimension	2.0 ± 0.5	1.0

Appendix 10

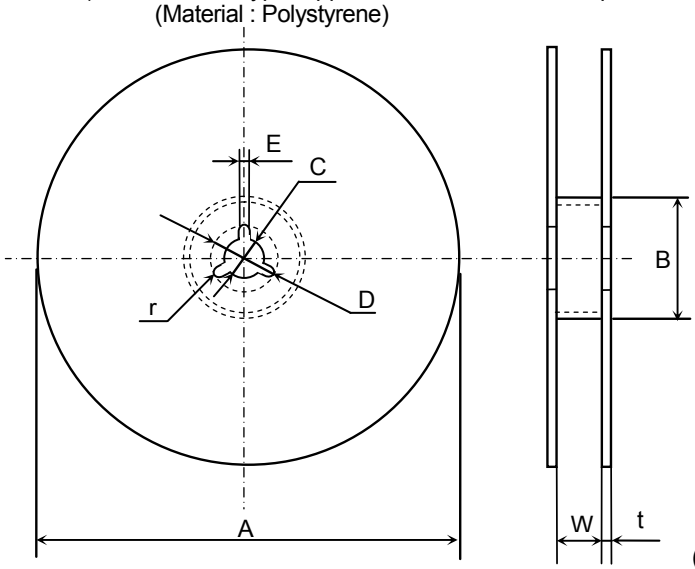C3225, C4532, C5750 (As for C3225 type, applied to 2.5mm thickness products)
(Material : Polystyrene)



(Unit : mm)

Symbol	A	B	C	D	E	W
Dimension	Ø382 max. (Nominal Ø330)	Ø50 min.	Ø13 ± 0.5	Ø21 ± 0.8	2.0 ± 0.5	14.0 ± 1.5

Symbol	t	r
Dimension	2.0 ± 0.5	1.0