


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/5/06	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

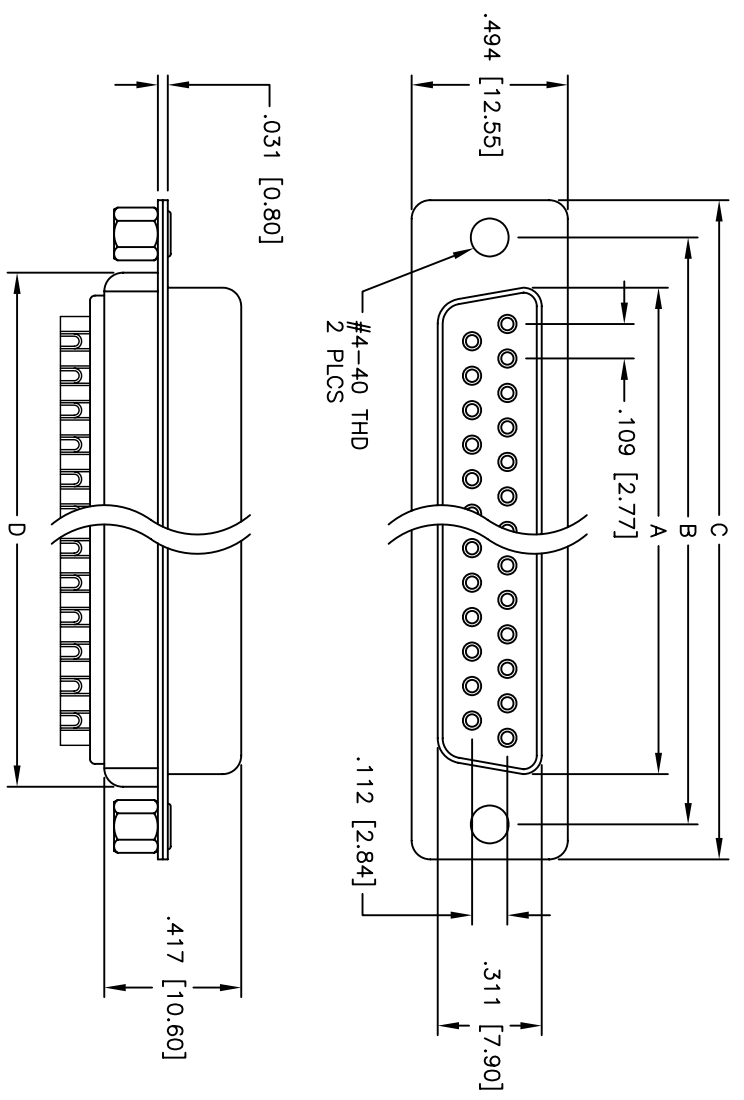

DXXX	NO. OF CONTACTS	DIMENSIONS			
		A	B	C	D
DE09	9	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.759 [19.28]
DA15	15	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]
DB25	25	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]
DC37	37	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]

**SPECIFICATIONS:**  
 Material: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Shell: Steel, Tin plated  
 Plating: Gold flash over Nickel underplate overall  
 Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 5 Amps max  
 Contact resistance: 20 mohms max  
 Insulation resistance: 5,000 Mohms min  
 Dielectric withstanding voltage: 1,000 VAC for 1 minute  
 Temperature Rating: Operating temperature: -65°C to +125°C  
 Environmental: Lead free, RoHS compliant



**ADAM TECH**  
 909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: D-SUB SOCKET, SOLDER CUP RIVETED #4-40 CLINCH NUTS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	INCHES	HOLDS	±.10	±.015	±.010
.X	±.10	ØXX	±.10	ØXXX	±.015
.XX	±.020	ØXXX	±.015	ØXXX	±.010
.XXX	±.015	ØXXX	±.010	ØXXX	±.010
APPROVALS		DATE			
DRAWN	SS	9/5/06			
CHECKED					
APPROVED					
SIZE	PART NO.	DXXX-SD-SL	SCALE:	NTS	SHEET 1 OF 1
REV.					