



DC Block on Inner and Outer Conductor 75 Ohm F Male
to F Female Operating From 10 MHz to 2 GHz

TECHNICAL DATA SHEET

PE8242

DC Block on Inner and Outer Conductor 75 Ohm F Male to F Female Operating From 10 MHz to 2 GHz

Configuration

Design	Inner/Outer DC Block
Body Style	Straight
Impedance	75 Ohms
Connector 1	F Male
Connector 2	F Female

Electrical Specifications

Frequency Range, GHz	0.01 to 2
Impedance, Ohms	75
Maximum VSWR	1.35:1
Maximum Insertion Loss, dB	0.5
Maximum Operating Voltage, Vrms	200

Mechanical Specifications

Size

Length, in [mm]	1.46 [37.08]
Width/Dia., in [mm]	0.437 [11.1]
Body Material and Plating	Passivated Stainless Steel

Connector 1

Type	F Male
Inner Conductor Material and Plating	Brass, Nickel
Outer Conductor Material and Plating	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel
Hex Size, Inch	7/16
Body Material and Plating	Passivated Stainless Steel

Connector 2

Type	F Female
Inner Conductor Material and Plating	Brass, Nickel
Outer Conductor Material and Plating	Brass, Nickel
Body Material and Plating	Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [DC Block on Inner and Outer Conductor 75 Ohm F Male to F Female Operating From 10 MHz to 2 GHz PE8242](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.





DC Block on Inner and Outer Conductor 75 Ohm F Male
to F Female Operating From 10 MHz to 2 GHz

TECHNICAL DATA SHEET

PE8242

Plotted and Other Data

Notes:

Values at 25 °C, sea level

DC Block on Inner and Outer Conductor 75 Ohm F Male to F Female Operating From 10 MHz to 2 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [DC Block on Inner and Outer Conductor 75 Ohm F Male to F Female Operating From 10 MHz to 2 GHz PE8242](http://www.pasternack.com/75-ohm-f-inner-outer-dc-block-0.1-2-ghz-pe8242-p.aspx)


URL: <http://www.pasternack.com/75-ohm-f-inner-outer-dc-block-0.1-2-ghz-pe8242-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



PE8242 CAD Drawing

DC Block on Inner and Outer Conductor 75 Ohm F Male to
F Female Operating From 10 MHz to 2 GHz

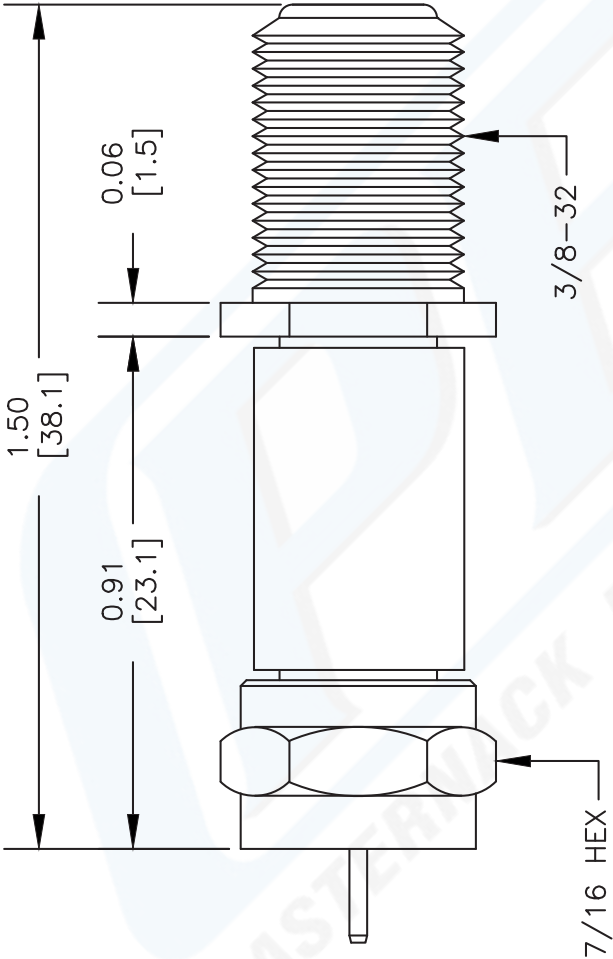

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE8242

FSCM NO. 53919

PE PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

XXXX

SIZE A

SCALE N/A

CAD FILE 080902