
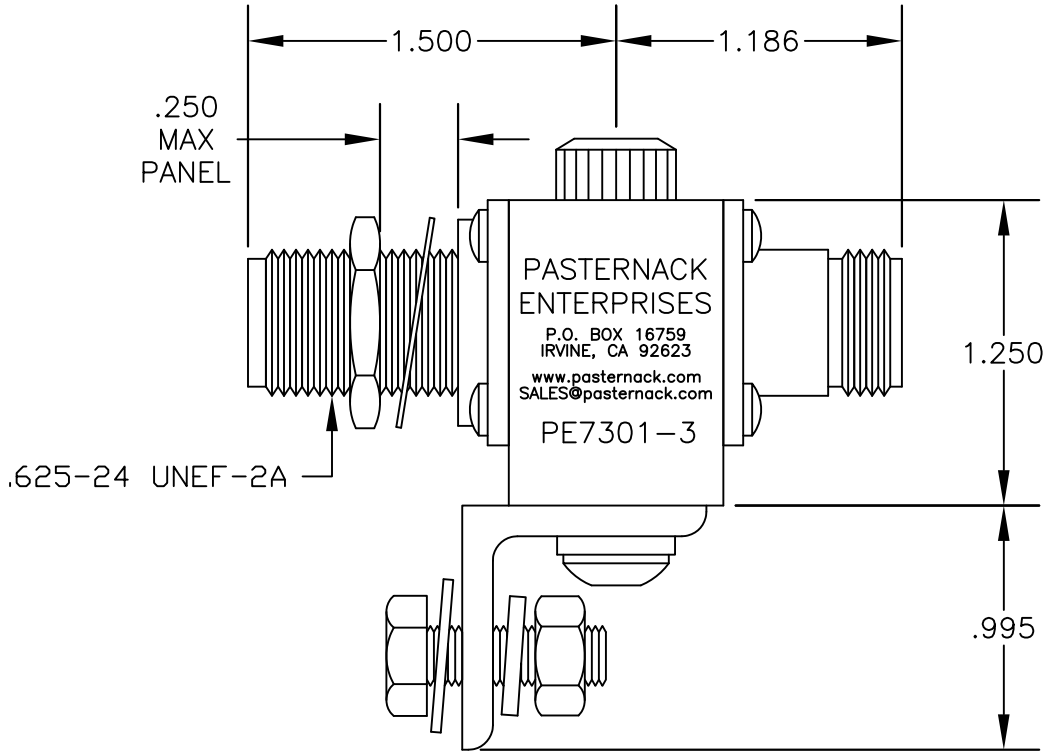


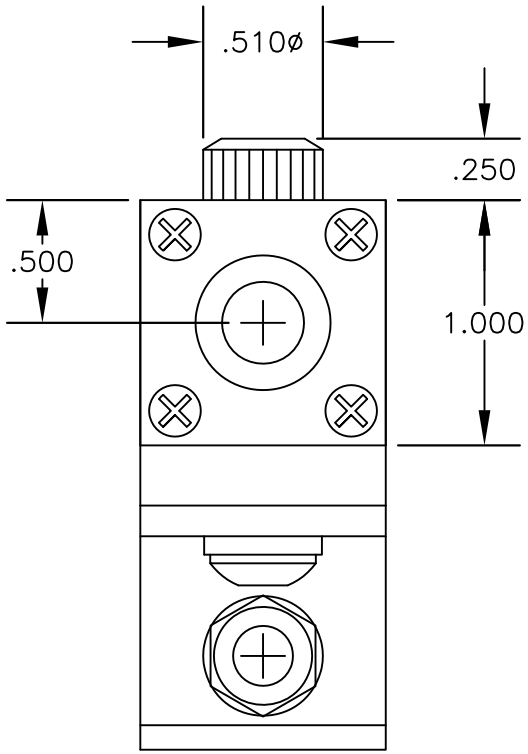

SPECIFICATIONS

FREQUENCY RANGE: DC – 3 GHz
INSERTION LOSS: .5 dB
IMPEDANCE: 50 OHMS
DC BLOCKING: NONE. WILL PASS DC FOR POWER AND CONTROL PURPOSES.
MAX DC OR PEAK AC IS 150V
FIRING POINT: 350V ± 15%@<100V/S>1000@5kv/µsRISE
BREAKDOWN VOLTAGE: 20 TO 30V
SURGE CURRENT: 5000A (8/20 µs PLUS)
PLUG LIFE: >600 TIMES @ 500A PLUSE(FIELD REPLACEABLE)
POWER HANDLING: 200 WATTS

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

DWG TITLE	DES.
PE7301-3	N FEMALE BULKHEAD, COAX SURGE PROTECTOR

REV. A	FSCM NO. 53919	CAD FILE 051109	SCALE N/A	SIZE A	127

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.