



LED Display Product Data Sheet LTP-3362E

Spec No.: DS30-2001-490

Effective Date: 09/16/2003

Revision: C

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

FEATURES

- * 0.3 inch (7.62 mm) DIGIT HEIGHT
- * CONTINUOUS UNIFORM SEGMENTS
- * LOW POWER REQUIREMENT
- * EXCELLENT CHARACTERS APPEARANCE
- * HIGH BRIGHTNESS & HIGH CONTRAST
- * WIDE VIEWING ANGLE
- * SOLID STATE RELIABILITY
- * CATEGORIZED FOR LUMINOUS INTENSITY


DESCRIPTION

The LTP-3362E is a 0.3 inch (7.62 mm) digit height dual digit 17-segment alphanumeric display. This device uses Red Orange LED chips (GaAsP epi on GaP substrate). The display has black face and white segments.

DEVICE


| PART NO. | DESCRIPTION |
|-----------------|--------------------------|
| RED ORANGE | Multiplex Common Cathode |
| LTP-3362E | Rt. Hand Decimal |

PACKAGE DIMENSIONS

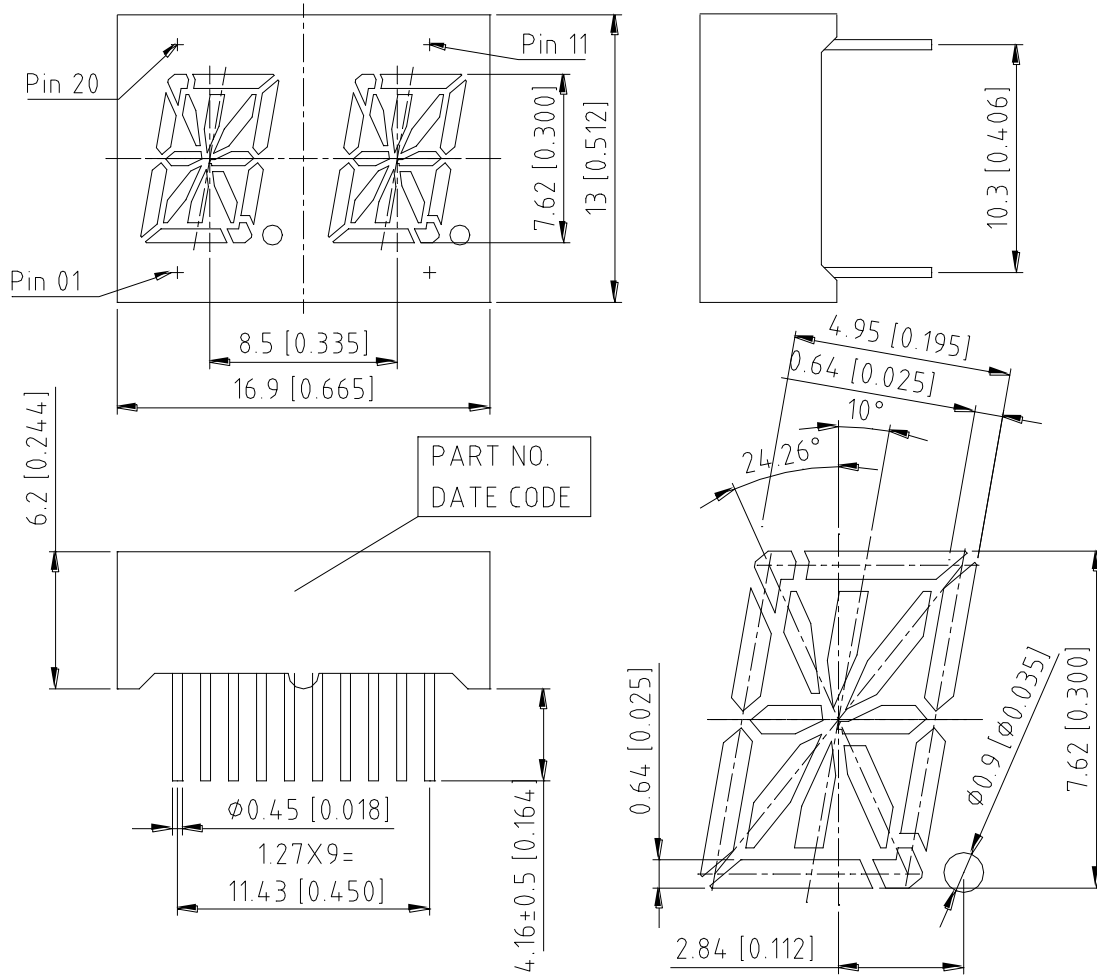

NOTES: All dimensions are in millimeters. Tolerances are $\pm 0.25\text{mm}$ (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

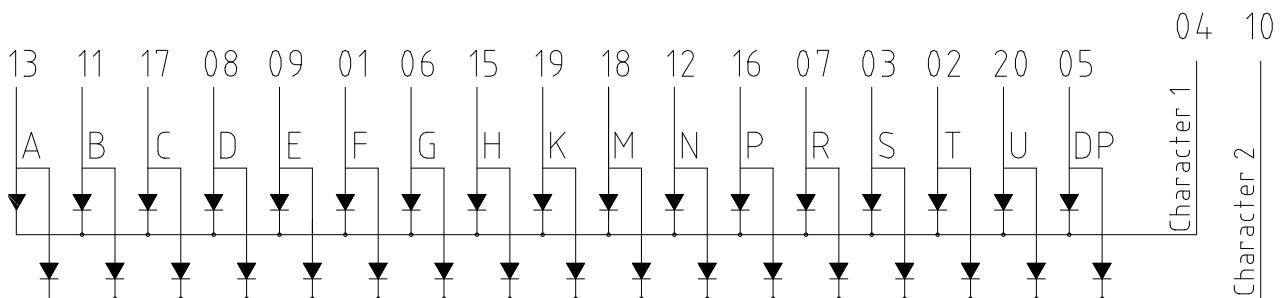

PIN CONNECTION

| No. | CONNECTION |
|------------|--------------------------|
| 1 | ANODE F |
| 2 | ANODE T |
| 3 | ANODE S |
| 4 | COMMON CATHODE (Digit 1) |
| 5 | ANODE DP |
| 6 | ANODE G |
| 7 | ANODE R |
| 8 | ANODE D |
| 9 | ANODE E |
| 10 | COMMON CATHODE (Digit 2) |
| 11 | ANODE B |
| 12 | ANODE N |
| 13 | ANODE A |
| 14 | NO CONNECTION |
| 15 | ANODE H |
| 16 | ANODE P |
| 17 | ANODE C |
| 18 | ANODE M |
| 19 | ANODE K |
| 20 | ANODE U |

ABSOLUTE MAXIMUM RATING

| PARAMETER | MAXIMUM RATING | UNIT |
|------------------------------------------------------------------------------------------|------------------------------------------|--------------------|
| Power Dissipation Per Segment | 75 | mW |
| Peak Forward Current Per Segment (Frequency 1Khz, 10% duty cycle) | 100* | mA |
| Continuous Forward Current Per Segment | 25 | mA |
| Forward Current Derating from 25 ⁰ C | 0.33 | mA/ ⁰ C |
| Reverse Voltage Per Segment | 5 | V |
| Operating Temperature Range | -35 ⁰ C to +85 ⁰ C | |
| Storage Temperature Range | -35 ⁰ C to +85 ⁰ C | |
| Soldering Conditions : 1/16 inch below seating plane for 3 seconds at 260 ⁰ C | | |

* see figure 5 to establish pulsed condition






ELECTRICAL / OPTICAL CHARACTERISTICS AT T_A=25⁰C

| PARAMETER | SYMBOL | MIN. | TYP. | MAX. | UNIT | TEST CONDITION |
|-------------------------------------------|-------------------|------|------|------|------|----------------------|
| Average Luminous Intensity Per Segment | I _v | 800 | 2000 | | μcd | I _F =10mA |
| Peak Emission Wavelength | λ _p | | 630 | | nm | I _F =20mA |
| Spectral Line Half-Width | Δλ | | 40 | | nm | I _F =20mA |
| Dominant Wavelength | λ _d | | 621 | | nm | I _F =20mA |
| Forward Voltage Per Segment | V _F | | 2.0 | 2.6 | V | I _F =20mA |
| Reverse Current Per Segment | I _R | | | 100 | μA | V _R =5V |
| Luminous Intensity Matching Ratio | I _v -m | | | 2:1 | | I _F =10mA |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

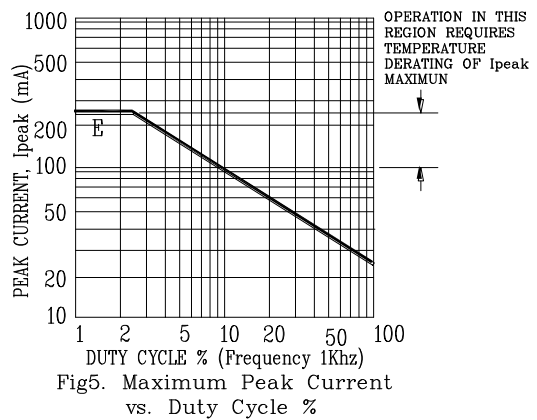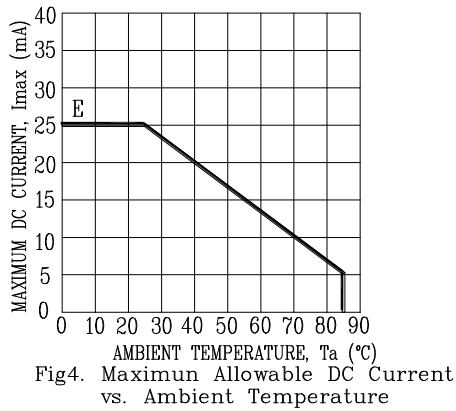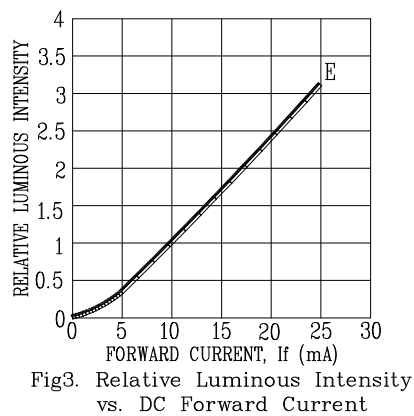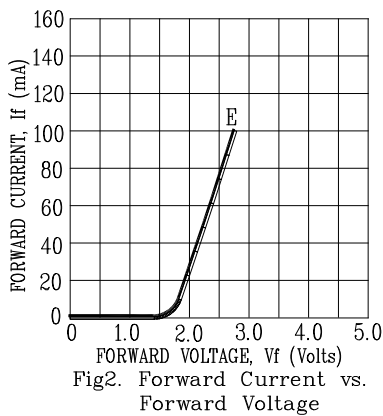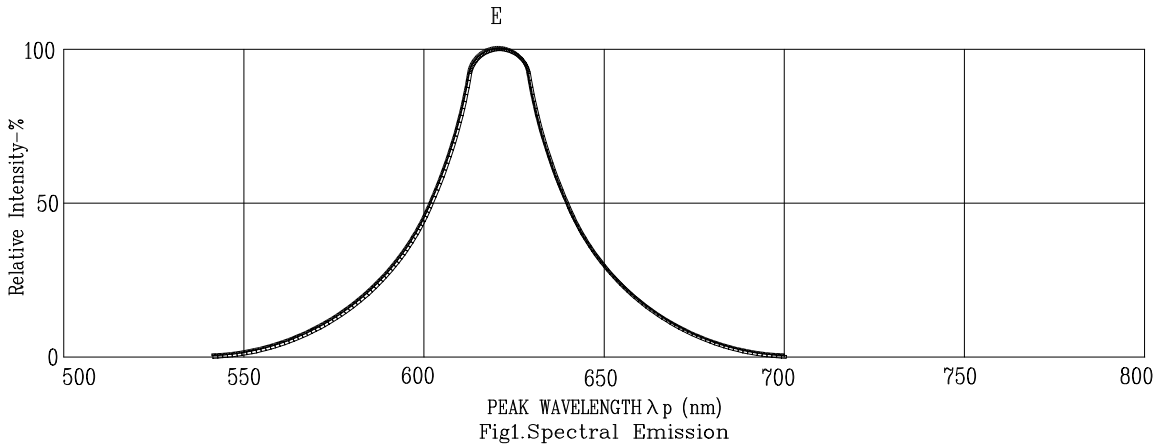

NOTE: E=RED ORANGE