

## FEATURES

- N+1 or N+R Parallel Redundancy for power guarantee
- Modular design decreases MTTR
- High scalability
- Built-in maintenance bypass switch for easy maintenance without interruptible
- High efficiency double conversion online UPS
- Adjustable battery numbers
- Adjustable charging current
- Graphic 5.7" LCD design for easy configuration

## PHASE (ONLY FOR ONLINE UPS)

**Phase:** 3-phase in / 3-phase out

## INPUT


**Capacity:** 120 KW  
**Voltage:** 3 x 400 VAC (3Ph+N)  
**Voltage Range:** 305-478 VAC (3-phase) @ 100% load  
 190-520 VAC (3-phase) @ 50% load  
**Frequency Range:** 40Hz ~ 70 Hz

## OUTPUT

**AC Voltage Regulation (Batt. Mode):** ±5 %  
**Frequency Range (Batt. Mode):** 46~54Hz or 56~64Hz  
**Waveform (Batt. Mode):** Pure Sine Wave

## BATTERY

**Battery Type:** NONE  
**Battery Number:** NONE  
**Typical Recharge Time:** NONE

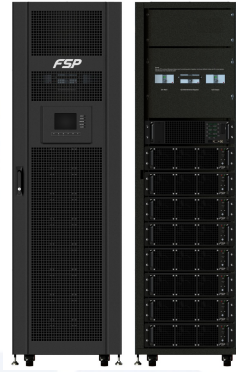

## SAFETY STANDARD APPROVAL



## PROTECTION

**Full Protection:** Full Protection

## PHYSICAL

**Output Receptacles:** India, French, Schuko, NEMA, and IEC selections  
 600mm(L) x 1100mm(W) x 2030mm(H)  
**Dimension:**  
**Net Weight (kgs):** NONE

## OPERATING ENVIRONMENT

**Humidity:** 0-90 % RH @ 0- 40°C (non-condensing)  
**Noise Level:** NONE

## MANAGEMENT

**Optional USB/RS-232 Port:** Support Windows 98/2000/2003/XP/Vista/2008, Windows 7, Linux, and MAC 8

This content is subject to change, please refer to specification for more detail.  
 FSP reserve the right to change the content without prior notice