

SOT-23 Plastic-Encapsulate Transistors


TRANSISTOR(PNP)

Features

- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BC817 (NPN)

Limiting Values (Absolute Maximum Rating)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-50	V
V_{CEO}	Collector-Emitter Voltage	-45	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current	-0.5	A
P_C	Collector Power Dissipation	300	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	417	$^{\circ}C/W$
T_j	Junction Temperature	150	$^{\circ}C$
T_{stg}	Storage Temperature	-55~+150	$^{\circ}C$

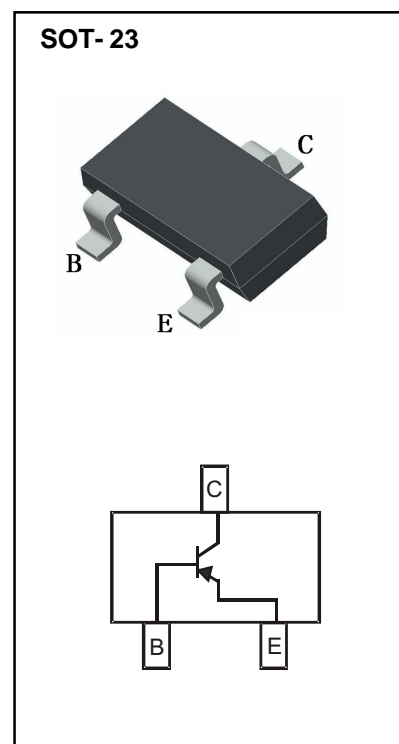









Electrical Characteristics (Ta=25 $^{\circ}C$ Unless otherwise specified)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_{CBO}	Collector-Base Voltage	$I_C = -10\mu A, I_E = 0$	-50			V
V_{CEO}	Collector-Emitter Voltage	$I_C = -10mA, I_B = 0$	-45			V
V_{EBO}	Emitter-Base Voltage	$I_E = -1\mu A, I_C = 0$	-5			V
I_{CBO}	Collector-Base Current	$V_{CB} = -45V, I_E = 0$			0.1	μA
I_{EBO}	Emitter-Base Current	$V_{EB} = -4V, I_C = 0$			0.1	μA
$h_{FE(1)}$	DC Current Gain	$V_{CE} = -1V, I_C = -100mA$	100		600	
		$V_{CE} = -1V, I_C = -500mA$	40			
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -500mA, I_B = 50mA$			0.7	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = -500mA, I_B = -50mA$			1.2	V
f_T	Transition Frequency	$V_{CE} = -5V, I_C = -10mA$ $f = 100MHz$	100			MHz


CLASSIFICATION OF h_{FE}

Rank	BC807-16	BC807-25	BC807-40
Range	100-250	160-400	250-600
Marking	5A	5B	5C

Typical Characteristics

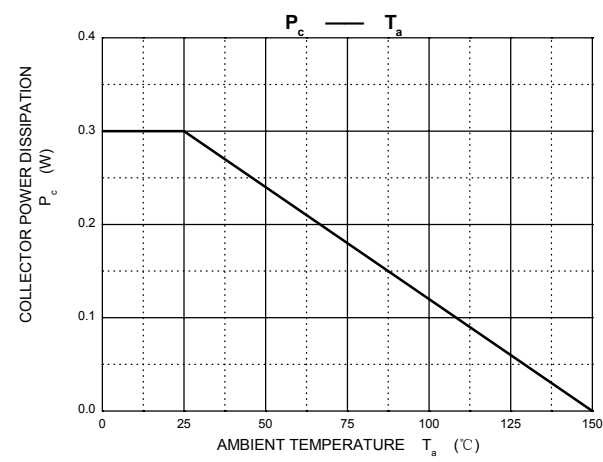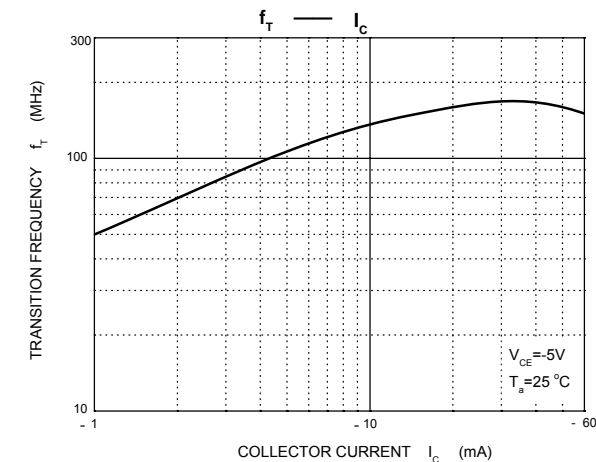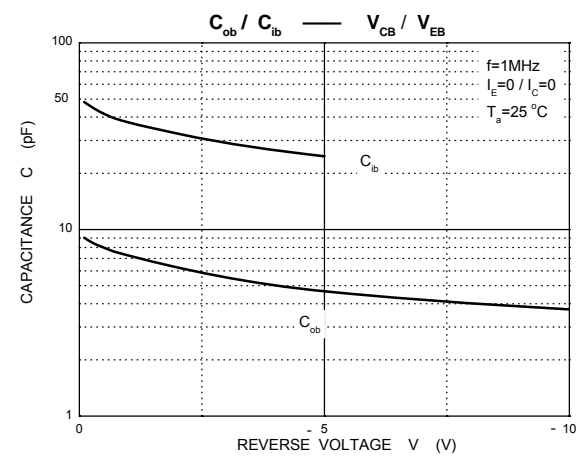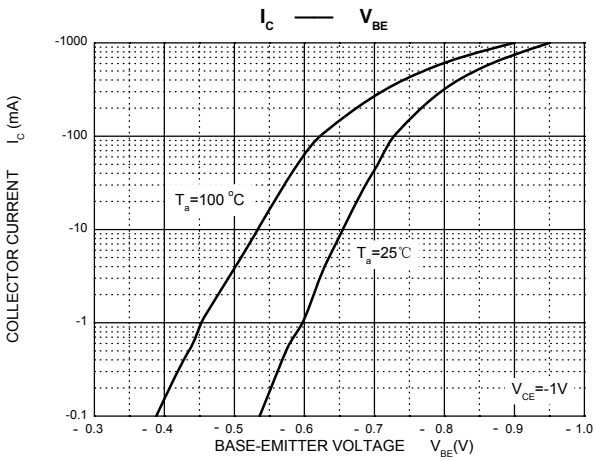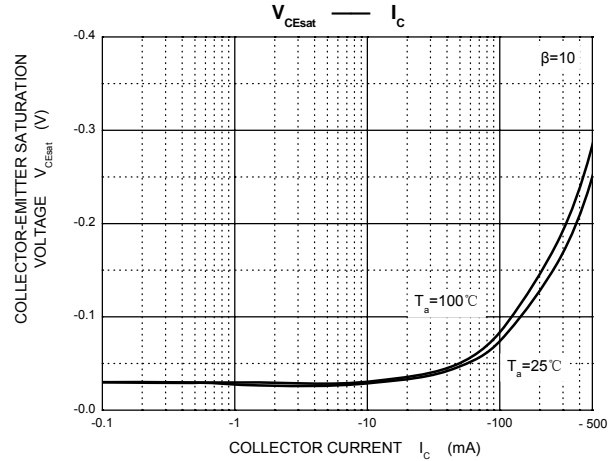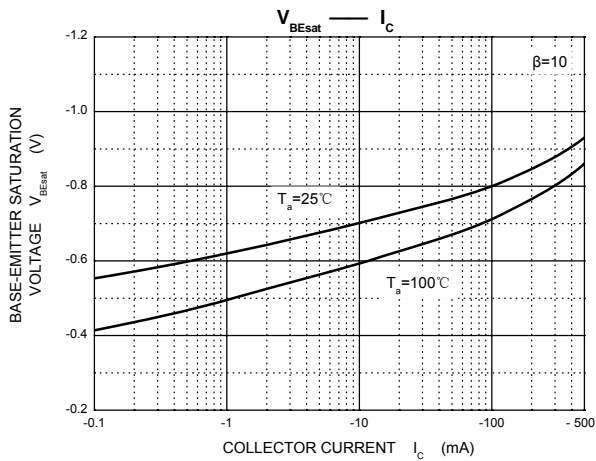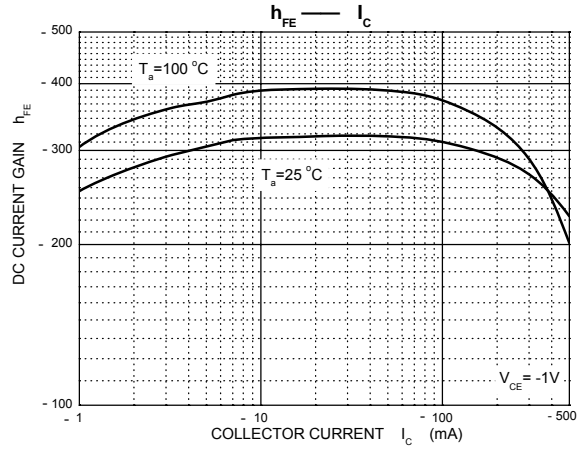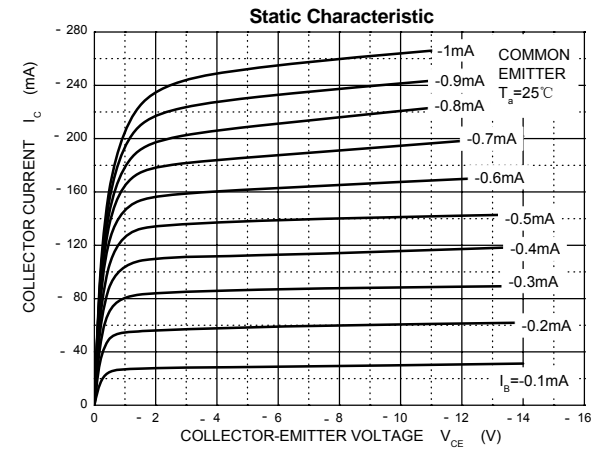


SOT-23 Package Outline Dimensions

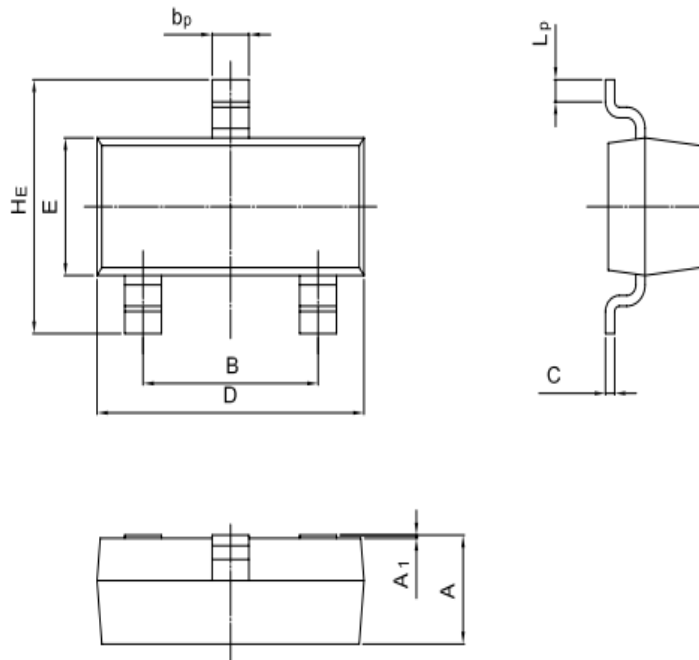

UNIT	A	B	bp	C	D	E	HE	A1	Lp
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20

SOT-23 Suggested Pad Layout

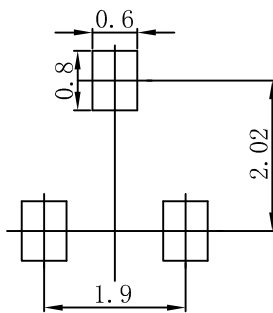

Note:


1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSJD reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSJD does not assume any liability arising out of the application or use of any product described herein.

Reel Taping Specifications For Surface Mount Devices-SOT-23

SOT-23 Embossed Carrier Tape

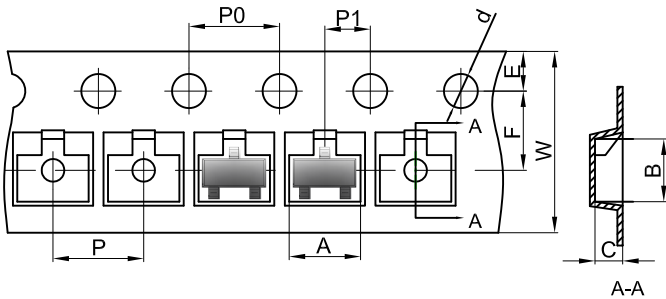


Packaging Description:

SOT-23 parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 17.8cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).


Dimensions are in millimeter

Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

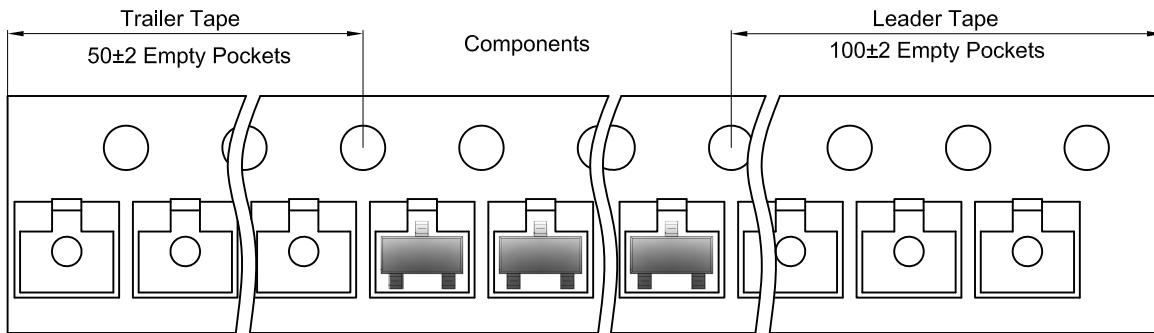

SOT-23 Reel

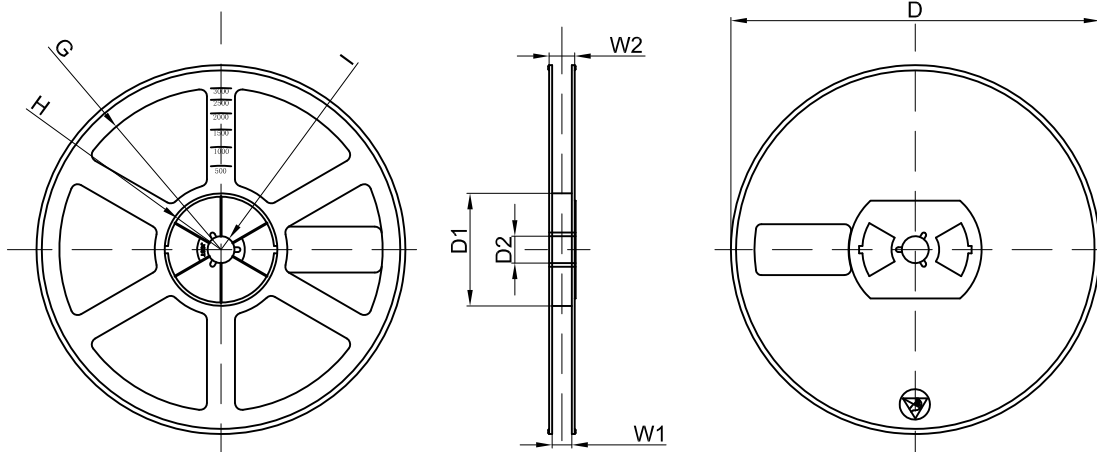

Dimensions are in millimeter

Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	203×203×195	180,000 pcs	438×438×230	