



Bridge Rectifiers

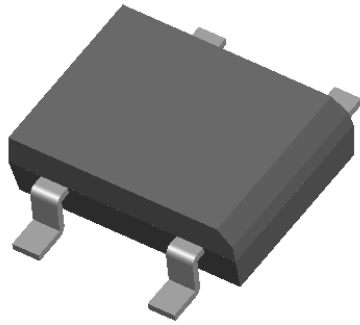

Features

- UL recognition, file #E313149
- Ideal for automated placement
- High surge current capability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260 °C

Typical Applications

General purpose use in AC/DC bridge full wave rectification for SMPS, lighting ballast, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

Mechanical Data

- **Package:** DBS
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, Halogen free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** As marked on body

■ Maximum Ratings (T_a=25 °C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	DF 2005S	DF 201S	DF 202S	DF 204S	DF 206S	DF 208S	DF 210S
Repetitive peak reverse voltage	V _{RRM}	V	50	100	200	400	600	800	1000
Average rectified output current @60Hz sine wave, R-load, T _a =40 °C	I _O	A	2.0						
Surge(non-repetitive)forward current @60Hz half sine wave, 1 cycle, T _j =25 °C	I _{FSM}	A	60						
Current squared time @1ms≤t<8.3ms T _j =25 °C, Rating of per diode	i ² t	A ² s	15						
Storage temperature	T _{stg}	°C	-55 ~+150						
Junction temperature	T _j	°C	-55 ~+150						

■ Electrical Characteristics (T_a=25 °C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	DF 2005S	DF 201S	DF 202S	DF 204S	DF 206S	DF 208S	DF 210S
Maximum instantaneous forward voltage drop per diode	V _F	V	I _F M=1.0A	1.00						
Maximum DC reverse current at rated DC blocking voltage per diode	I _{RRM}	μA	V _{RM} =V _{RRM}	5						

■ Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER		SYMBOL	UNIT	DF 2005S	DF 201S	DF 202S	DF 204S	DF 206S	DF 208S	DF 210S
Thermal Resistance	Between junction and ambient, On glass-epoxy substrate	R _{θJA}	°C/W	68.0						
	Between junction and lead	R _{θJL}		15.0						

■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
DF2005S ~ DF210S	B1	Approximate 0.34	50	5000	20000	TUBE
DF2005S ~ DF210S	F1	Approximate 0.34	1500	3000	21000	REEL

■ Characteristics(Typical)

FIG1: I_o-T_a Curve

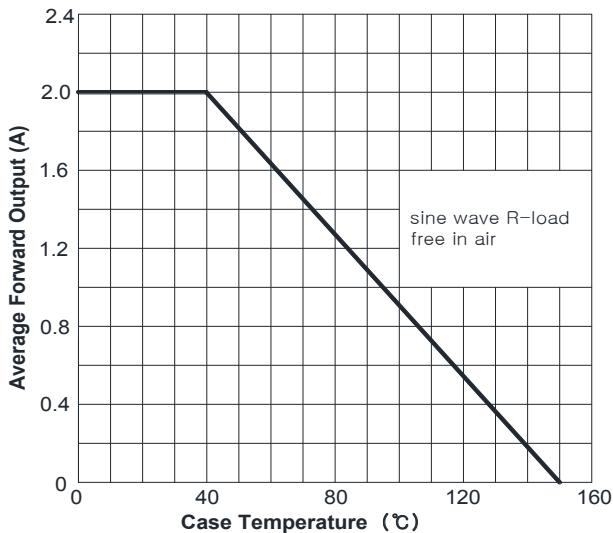


FIG2: Surge Forward Current Capability

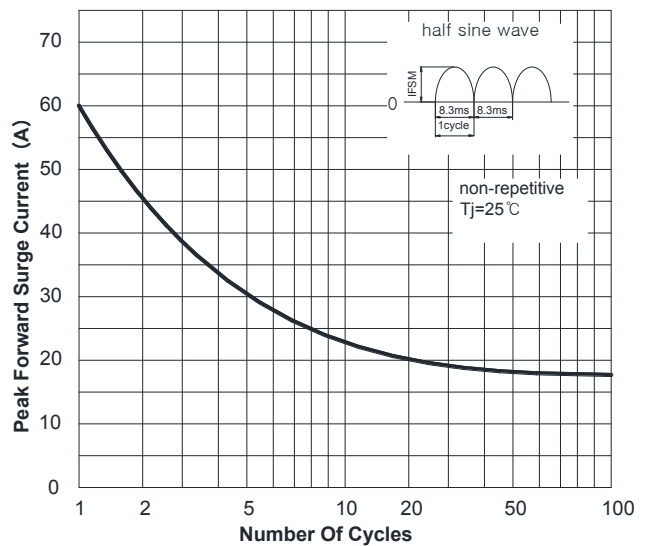


FIG3: Forward Voltage



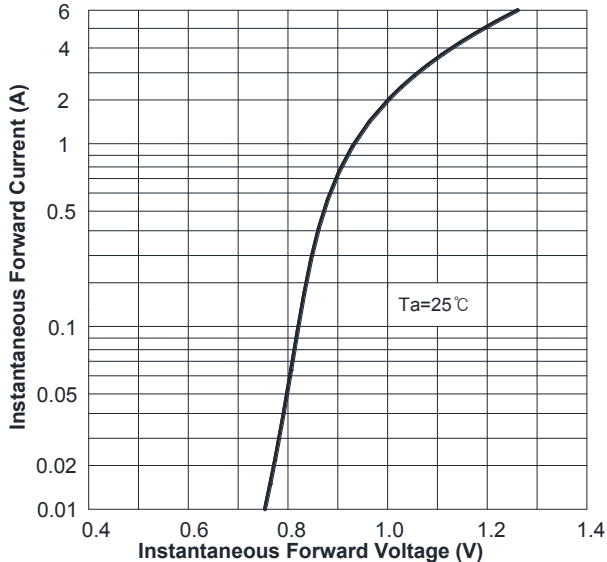


FIG4: Typical Reverse Characteristics

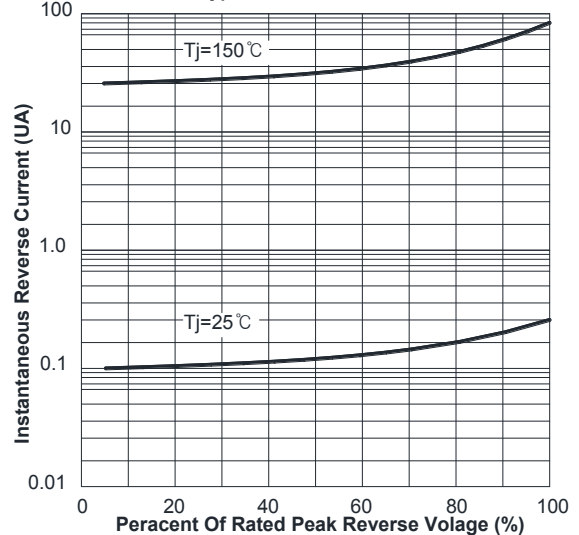


■ **Outline Dimensions**

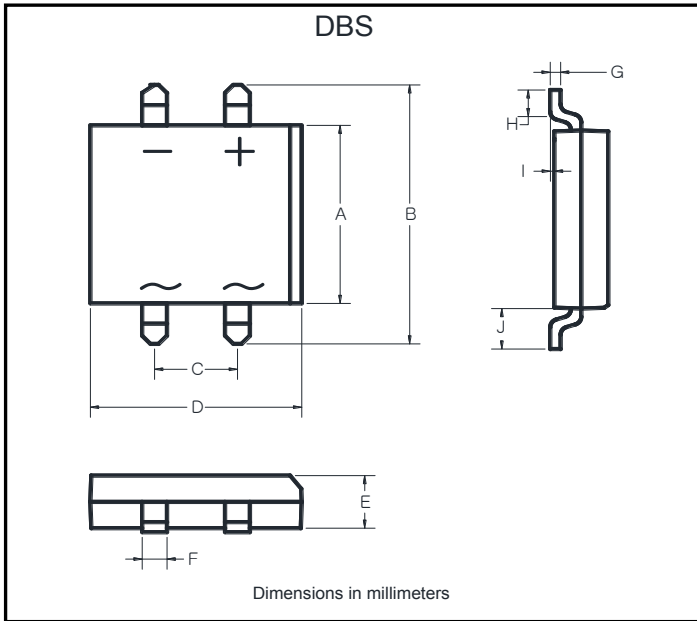

DBS		
Dim	Min	Max
A	6.20	6.50
B	9.60	10.30
C	5.00	5.20
D	8.13	8.51
E	2.80	3.30
F	1.02	1.2
G	0.22	0.33
H	1.02	1.53
I	0.076	0.33
J	1.80	2.10

■ **Suggested pad layout**

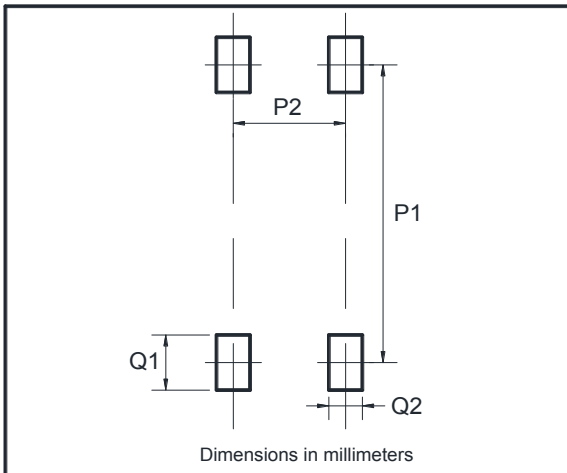

Dim	Min
P1	8.73
P2	5.12
Q1	2.22
Q2	1.2