SP 6.3x32

Miniature Fuse, 6.3 x 32 mm, Quick-Acting F, Sand, 250 VAC



250 VAC · Quick-Acting F

See below:
Approvals and Compliances

Description

- H = High Breaking Capacity

Weblinks

pdf datasheet, html-datasheet, General Product Information, Packaging details, Distributor-Stock-Check, Detailed request for product

Technical Data

Rated Voltage	250 VAC
Rated current	0.5 - 20 A
Breaking Capacity	1000 A - 1500 A
Characteristic	Quick-Acting F
Mounting	Fuseholder / Clip
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Tube	Glass with sand filling
Material: Endcaps	Nickel-Plated Copper Alloy
Unit Weight	2.51 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	, Rated current, Rated Voltage, Characteristic, Approvals

Resistance to Vibration	acc. to IEC 60068-2-6, test Fc

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Application standards

Application standards where the product can be used

Organization	Design	Standard	Description
IEC	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technologyequipment.


Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
CE	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
50	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimension [mm]




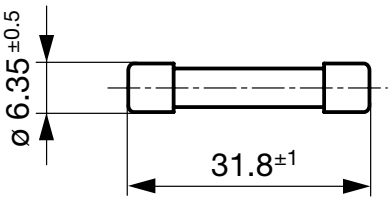

Pre-Arcing Time

Rated Current In	1.5 x In min.	2.1 x In max.	2.75 x In min.	2.75 x In max.	4.0 x In min.	4.0 x In max.	10.0 x In max.
0.5 A - 4 A	60 min	60 min	70 ms	5 s	10 ms	150 ms	10 ms
5 A - 20 A	60 min	60 min	150 ms	2 s	25 ms	200 ms	20 ms

Time-Current-Curves

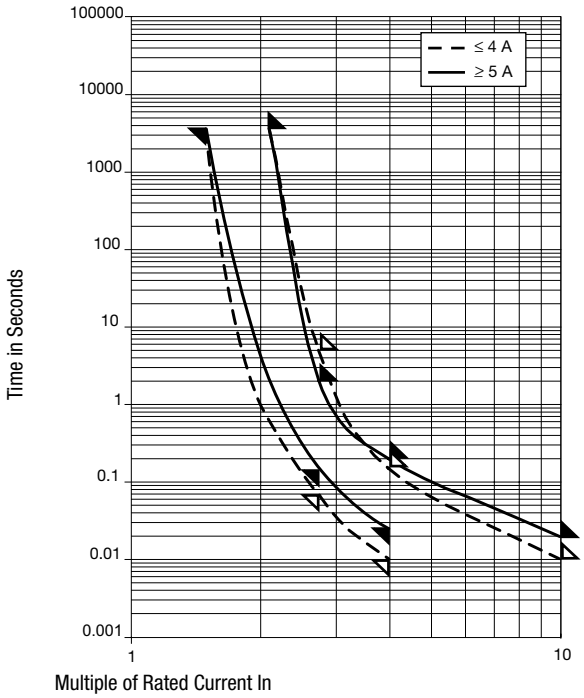

All Variants

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In max. [mV]	Voltage Drop 1.0 In typ. [mV]	Power Dissipation 1.5 I_n typ. [mW]	Melting I^2t 10.0 Intyp. [A^2s]	Order Number
0.5	250	1)	3000	1000	3000	0.13	0001.1021
0.63	250	1)	2500	2500	3800	0.003	0001.1022
0.8	250	1)	2200	520	1200	0.06	0001.1023
1	250	1)	1900	410	1200	0.4	0001.1024
1.25	250	1)	1600	1600	5400	-	0001.1025

Rated Current [A]	Rated Voltage [VAC]	Breaking Capacity	Voltage Drop 1.0 In max. [mV]	Voltage Drop 1.0 In typ. [mV]	Power Dissipation 1.5 I_n typ. [mW]	Melting I^2t 10.0 Intyp. [A^2s]	Order Number	
1.6	250	1)	1300	460	2100	1.2	0001.1026	
2	250	1)	1000	340	2000	2.4	0001.1027	
2.5	250	1)	700	350	2800	4.1	0001.1028	
3.15	250	1)	600	270	3000	7.9	0001.1029	■
4	250	1)	550	270	3500	15	0001.1030	
5	250	1)	500	240	3700	32	0001.1031	
6.3	250	1)	450	170	4700	38	0001.1032	
8	250	1)	400	250	6700	62	0001.1033	
10	250	1)	350	150	5200	140	0001.1034	■
12.5	250	2)	300	150	7600	230	0001.1035	■
16	250	2)	250	130	8400	455	0001.1036	■
20	250	2)	250	130	11500	846	0001.1037	■

■ Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

1) 1500 A @ 250 VAC , p.f. = 0.7 - 0.8

2) 1000 A @ 250 VAC , p.f. = 0.7 - 0.8

Packaging Unit Small Box Pack (10 pcs.)

26.02.2018

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.