
REV.	AUTH.	DATE		APPROVED
–	R.L.	5/18/04	INITIAL RELEASE	

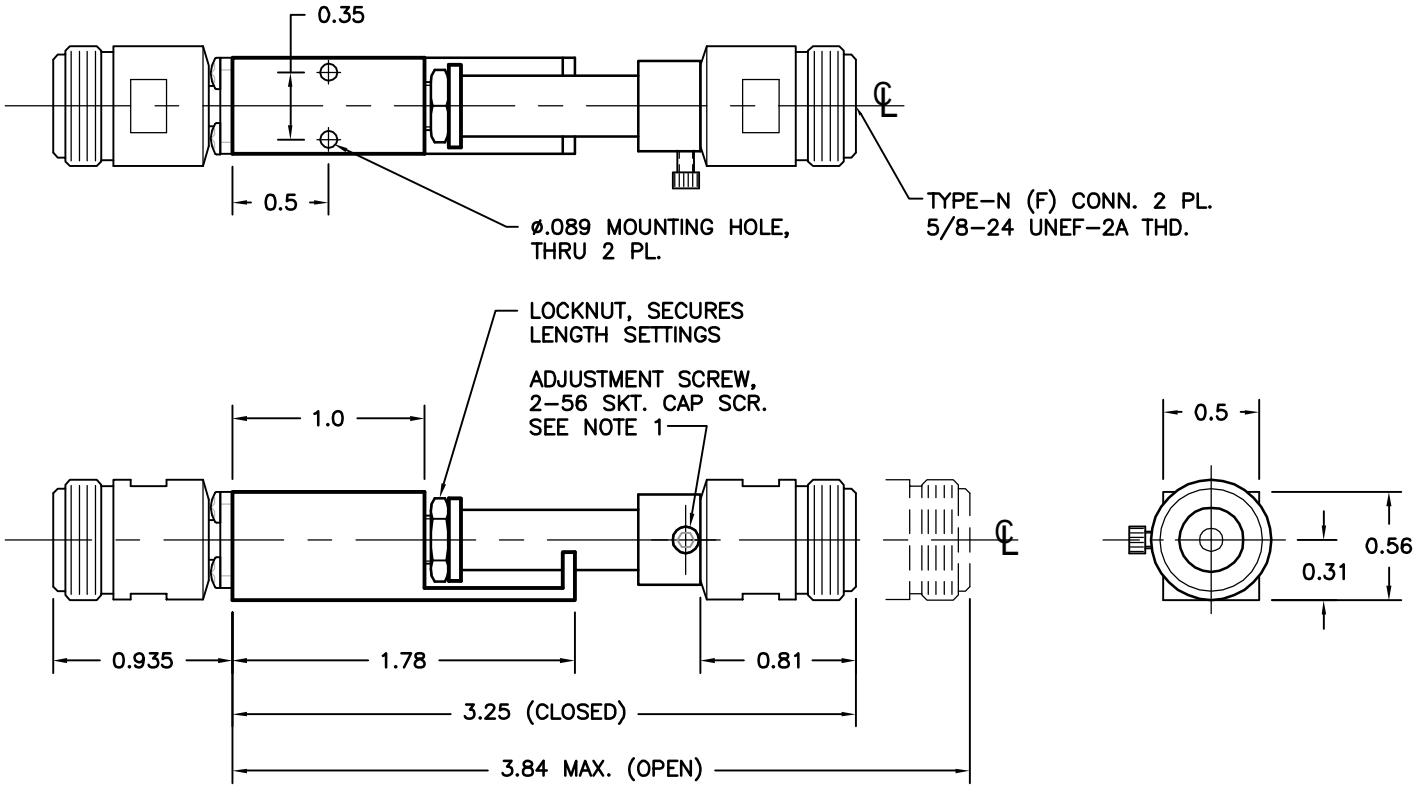

NOTES:

1. LOOSENING THUMBSCREW ALLOWS LENGTH ADJUSTMENT WITHOUT DISCONNECTING CABLE.

FREQ. (GHz)	VSWR (MAX.)	MIN. PHASE ADJUST	I.L. dB (MAX.)	MODEL #
DC – 2.3	1.35	15°/GHz	0.2	P2913
DC – 4.3	1.4	15°/GHz	0.3	P2914
DC – 8.2	1.5	15°/GHz	0.5	P2915
DC – 12.7	1.6	15°/GHz	0.5	P2916
DC – 18.0	1.7	15°/GHz	0.7	P2917

MATERIAL _	TREATMENT _	DRAWN R. LYNCH	DATE 5/18/04
FINISH BRIGHT NICKEL	MOD NO. P291_	CHECKED	DATE
OUTLINE, P291_ LINE STRETCHER		APPROVED	DATE
		CAGE CODE: 0R8N4	DO NOT SCALE DWG

ADVANCED TECHNICAL MATERIALS, INC.
49 RIDER AVE., PATCHOGUE N.Y. 11772
TEL: (631) 289–0363 FAX: (631) 289–0358
http://www.atmmicrowave.com

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	FRACTIONS ±1/64	DECIMALS ±.01 ±.005	ANGLES ±1/2°	SHEET. 1/1
	SCALE 1 : 1	DWG. NO. 3934		REV. A