

Construction

- Dielectric: polypropylene film
- Plastic case
- Polyurethane resin
- Internal discharge resistor

Features

- Self-healing properties
- Low dissipation factor
- High insulation resistance

Typical applications


For general sine wave applications, mainly as series and parallel connection lighting capacitor

Terminals

- Push-in terminals

Mounting parts

- Metal stud (max. torque = 5 Nm)
- Plastic stud (max. torque = 3 Nm)

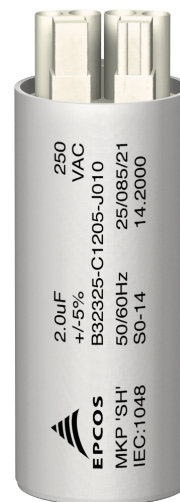

Technical data and specifications

Standard	IEC / EN 61048 / 61049 (except destruction test)
Rated capacitance C_N	2 .. 25 µF
Tolerance	± 5% , ±10%
Rated voltage U_N	250 Vac
Rated frequency f_N	50.. 60 Hz
Life expectancy	10 years
Maximum ratings	
Maximum permissible voltage U_{max}	1,1 x U_N (U_N : rated voltage)
Maximum permissible current I_{max}	1,3 x I_N (I_N : rated current)

Technical data (cont`d)

Test data

AC test voltage terminal to terminal U_{TT}	$2.0 \times U_N$, 60s
Insulation voltage terminals to case	2000 Vac
Insulation resistance R_{is} or time τ constant at 20 °C	
Rel. Humidity ≤ 65 °C (minimum value)	3000 s
Dissipation factor $\tan\delta$ at 20 °C	$\leq 1,0 \times 10^{-3}$ (120 Hz)
Maximum rate of voltage rise du/dt_{max}	10 V/ μ s


Climatic data

Climatic category	25/085/21 in accordance with IEC 60068-1
Lower category T_{min}	-25 °C
Upper category T_{max}	+85 °C
Damp heat test t_{test}	21 days
Permitted capacitance $\Delta C/C$	≤ 3 %

Note :

- 1) It should be noted that presence of harmonics produces over voltage & over current on capacitors. Resonance may cause serious damage to installation if a significant level of total harmonic distortion level exists for voltage or current. In such cases, series reactors must be considered.
- 2) Operating temperature class: In accordance with the reference standards, these temperatures are those measured on the surface on the capacitor

Dimensional drawings

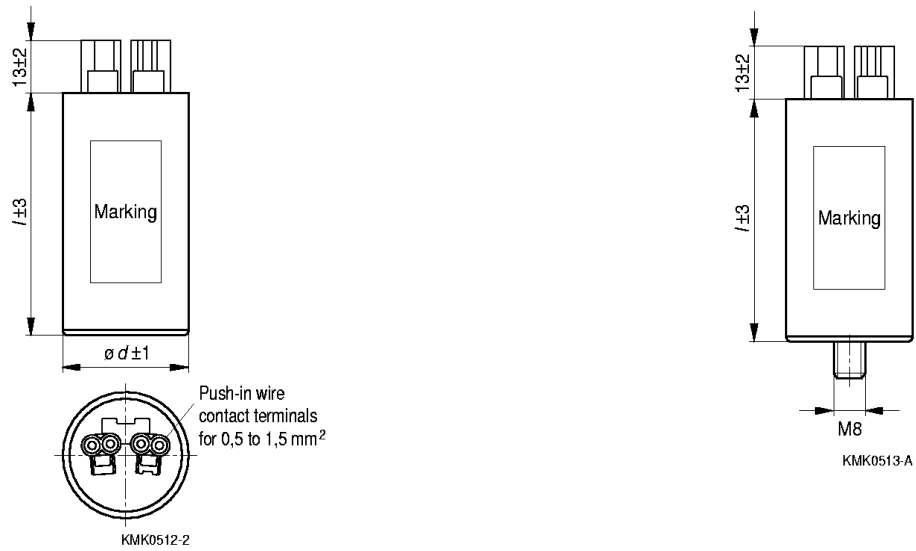

Ordering codes and packing units

U_N Vac	C_N μF	Max. dimensions $d \times l$ (mm)	Ordering code	Packing unit (pcs.)
250	2	25 x 58	B32325-A1205-+0\$0	112
	3	25 x 58	B32325-A1305-+0\$0	112
	3.25	25 x 58	B32325-A1325-+5\$0	112
	3.5	25 x 58	B32325-A1355-+0\$0	112
	4	25 x 58	B32325-A1405-+0\$0	112
	5	25 x 58	B32325-A1505-+0\$0	112
	6	30 x 60	B32325-A1605-+0\$0	112
	7	30 x 60	B32325-A1705-+0\$0	112
	8	30 x 60	B32325-A1805-+0\$0	112
	9	30 x 60	B32325-A1905-+0\$0	112
	10	35 x 60	B32325-A1106-+0\$0	84
	12	35 x 60	B32325-A1126-+0\$0	84
	15	35 x 70	B32325-A1156-+0\$0	84
	20	35 x 70	B32325-A1206-+0\$0	84
	22	40 x 70	B32325-A1226-+0\$0	45
	25	40 x 70	B32325-A1256-+0\$0	45

Notes for ordering code:

+ Replace for capacitance tolerance

J - $\pm 5\%$

K - $\pm 10\%$

\$ Replace for construction

1 - Plastic case FR (UL94 V-1)

3 - Plastic case FR (UL94 V-1) and M8 bolt

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this data sheet describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.