
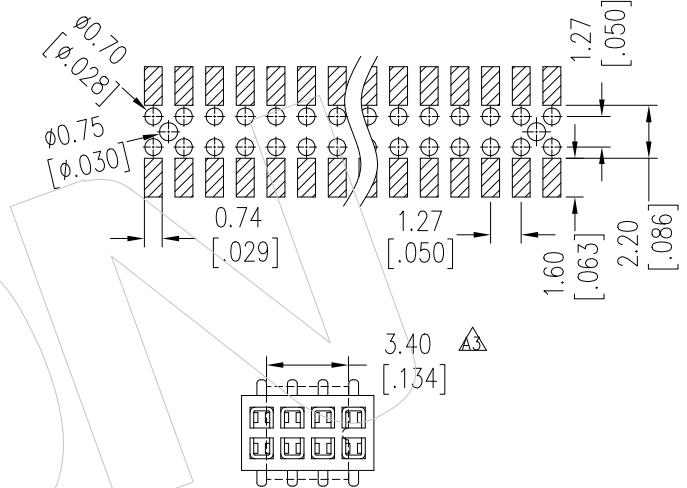


HSF

NOTES:
 Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40℃ to +125℃(Au)
 Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+33%GF UL94V-0



Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

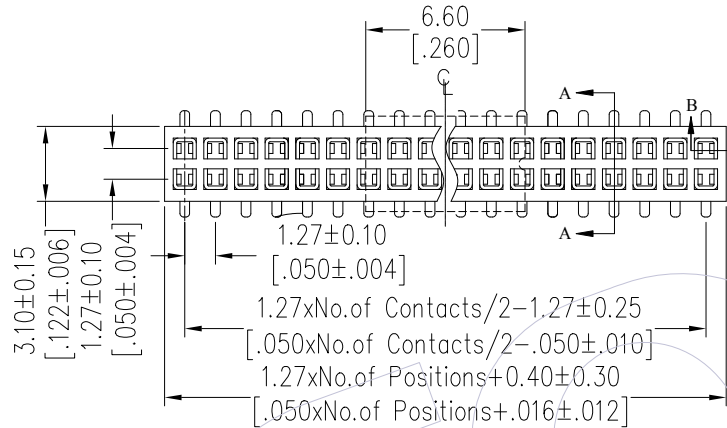

Ordering Information

2320T - 2 XX M XX CUN X X

AA: No. of Pins per ROW: 02~40PIN
 Contact Plating: G0=Gold Flash, G3=10μ"Gold, G4=15μ"Gold, G5=30μ"Gold
 Packing: T=Tube, R=Tape&Reel+CAP, P=Tube+CAP
 Series No. 1=TYPE 1, 2=TYPE 2

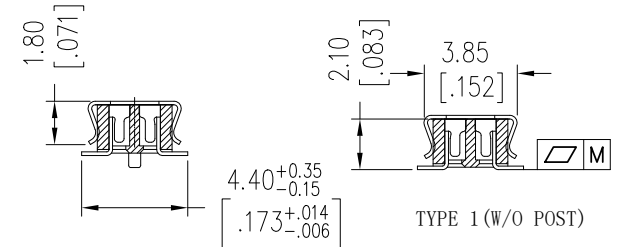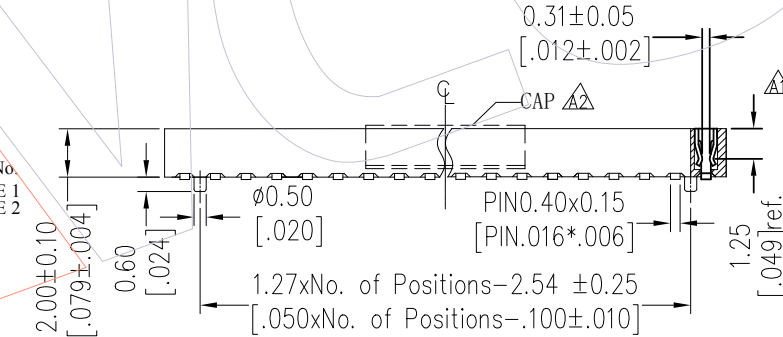

SECTION B-B

SECTION A-A

Item	Pitch	Mating
Standard	1.27	1310/1315/1320
Alternate		

			TYPE		PART NO.	
PIN	2-15P	16-30P	31-50P	TYPE 1	2320T-2XXMXXCUNX1	
M	0.10	0.12	0.18	TYPE 2	2320T-2XXMXXCUNX2	

A4	2020/06/24	Add DIM.&Table;Modify 02~50PIN to 02~40PIN AA	XSR	OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
A3	2016/05/30	Modify CAP 3.00 → 3.40 A3	XSR	x.x	±0.40	XSR		2020/06/24		UNIT		mm		SEE TABLE	
A2	2014/12/30	Modify CAP	XSR	x.xx	±0.25	CHECK		DATE		SIZE		A4		TITLE: 1.27mm Female Header Dual Bottom Enter SMT H=2.0	
A0	2012/07/05	NEW	-----	x.xxx	±0.15	APPROVE		DATE		SHEET		1/1		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3°	APPROVE		DATE		PROJ.		Customer NO.			
				DIM	TOL										

WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com