SP6850
Green-Mode PWM Controller


DESCRIPTION
The SP6850 is the current mode PWM controller with green-mode power-saving operation, to meet the low standby-power needs of low-power SMPS. This green-mode function enables the power supply to easily meet even the strictest power conservation requirements. The functions such as the leading-edge blanking of the current sensing, internal slope compensation and the small package provide the high efficiency / low cost for SMPS power applications. SP6850 is processed by BiCMOS fabrication, that enables reducing the start-up current and the operating current. SP6850 is available by SOT-23-6L / DIP-8P packages.

APPLICATIONS
- AC/DC Switching Power Adaptor
- Battery Charger
- PC 5V Standby Power.
- Open-Frame Switching Power Supply


FEATURES
- High-Voltage BiCMOS Process
- Very Low Startup Current (Typ ~ 8μA)
- Under Voltage Lockout (UVLO)
- Current Mode Control with Cycle Peak
- Current Limiting
- Leading-Edge Blanking
- Programmable Switching Frequency
- Internal Slope Compensation
- Green-Mode Control for Power Saving
- Non-audible-noise Green Mode Control
- 300mA Driving Capability
- OVP (Over Voltage Protection) on Vcc Pin

PIN CONFIGURATION

SOT-23-6L




DIP-8P

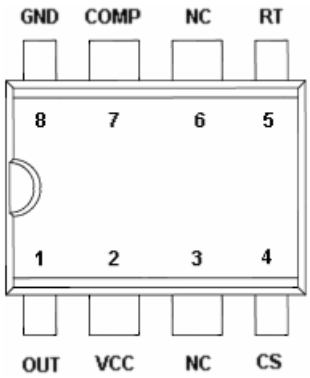

PART MARKING


SOT-23-6L




DIP-8P



TYPICAL APPLCATION CIRCUIT

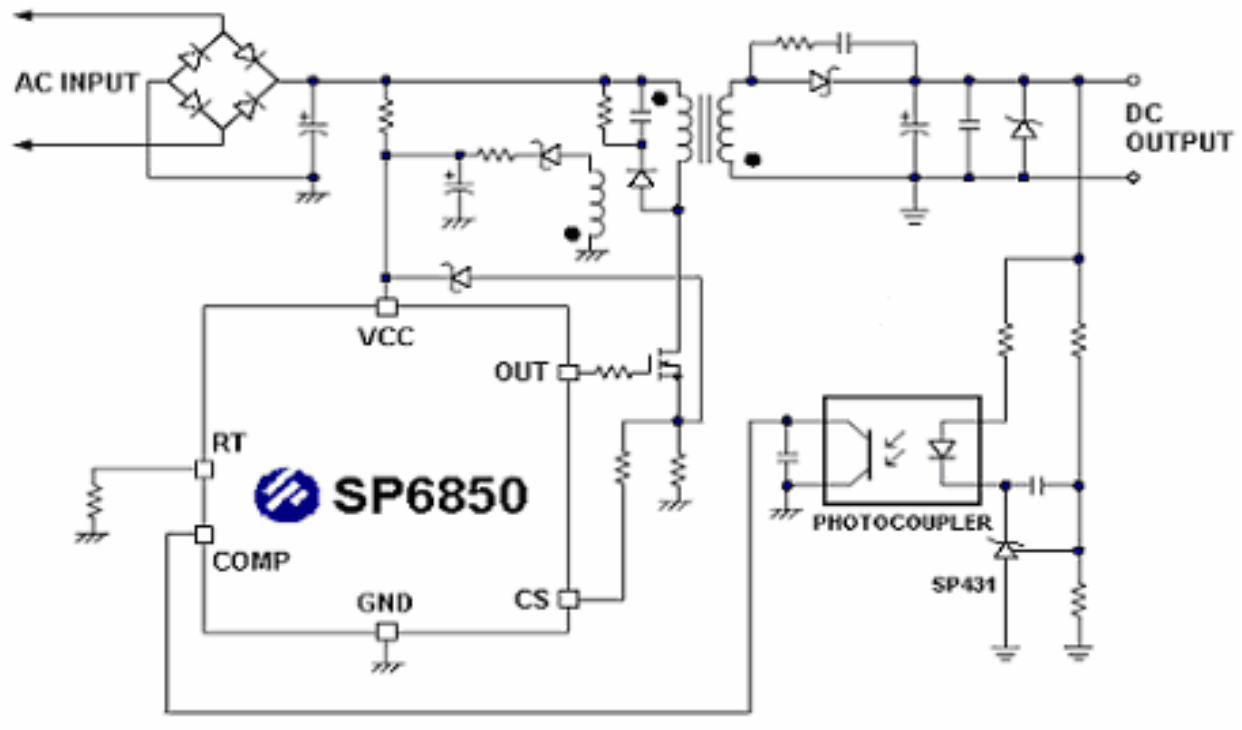

TYPICAL APPLCATION CIRCUIT (High Efficiency SMPS + Synchronous Rectifier)

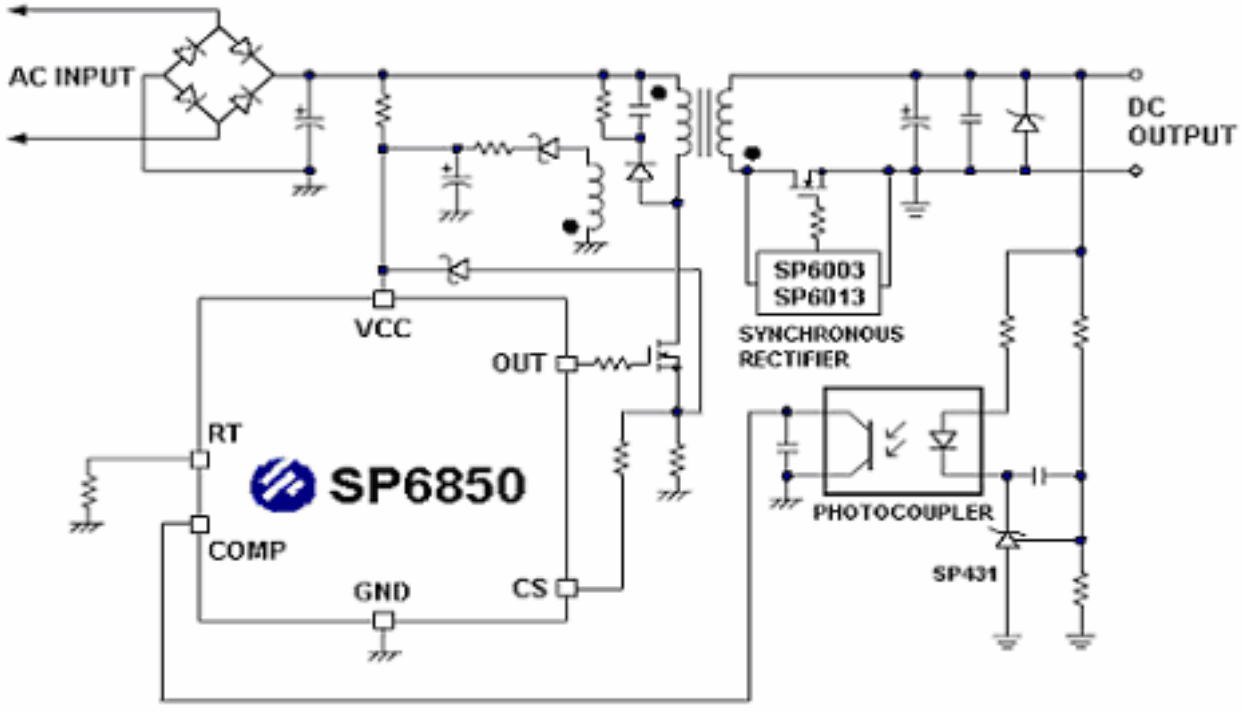

PIN DESCRIPTION


SP6850D8TG

Pin	Symbol	Description
1	OUT	Gate driver output to drive the external MOSFET
2	VCC	Supply Voltage in
3	NC	Unconnected pin
4	CS	Current sense. This pin senses the voltage across a resistor, to control PWM output. This pin also provides current amplitude information for current-mode control.
5	RT	This current is used to charge an internal capacitor, to determine the switching frequency.
6	NC	Unconnected pin
7	COMP	Voltage feedback. The pin provides the output voltage regulation signal., it provides feedback to the internal PWM comparator, so that the PWM comparator can control the duty cycle.
8	GND	Ground

SP6850S26RG

Pin	Symbol	Description
1	GND	Ground
2	COMP	Voltage feedback. The pin provides the output voltage regulation signal., it provides feedback to the internal PWM comparator, so that the PWM comparator can control the duty cycle
3	RT	This current is used to charge an internal capacitor, to determine the switching frequency.
4	CS	Current sense. This pin senses the voltage across a resistor, to control PWM output. This pin also provides current amplitude information for current-mode control
5	VCC	Supply Voltage in
6	OUT	Gate driver output to drive the external MOSFET

BLOCK DIAGRAM

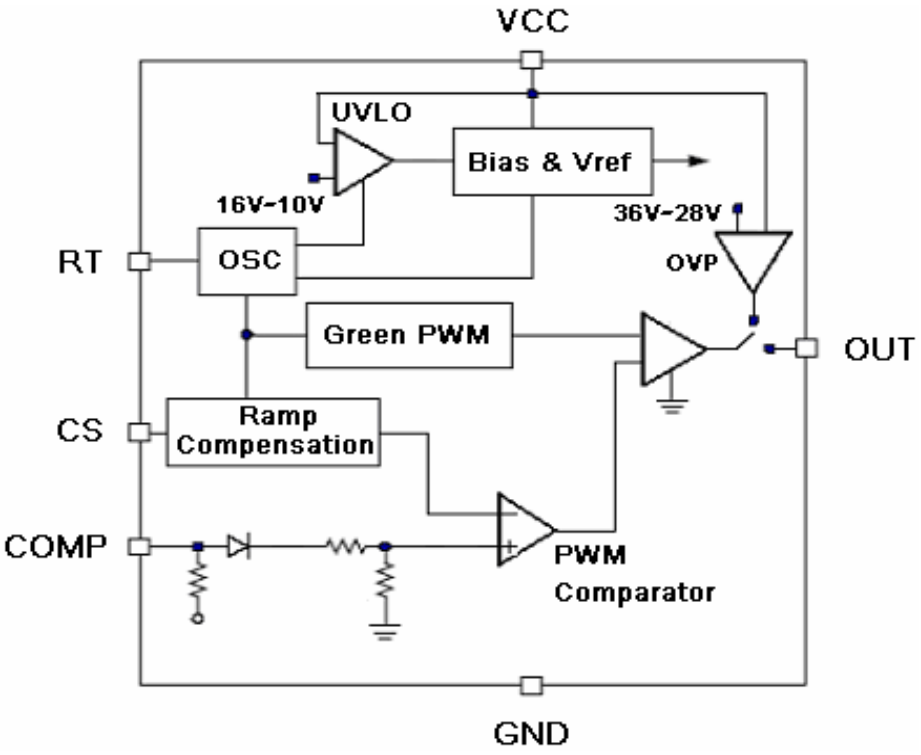

ORDERING INFORMATION

Part Number	Package	Part Marking
SP6850AD8TG	DIP-8P	SP6850**I**
SP6850BD8TG	DIP-8P	SP6850**I**
SP6850AS26RG	SOT-23-6L	85AYW
SP6850BS26RG	SOT-23-6L	850YW

※ SP6850AD8TG / SP6850BD8TG : Tube ; Pb – Free

※ SP6850AS26RG / SP6850BS26RG : Tape Reel ; Pb – Free

ABSOULTE MAXIMUM RATINGS (T_A=25℃, unless otherwise specified.)

The following ratings designate persistent limits beyond which damage to the device may occur.

Symbol	Parameter		Value	Unit
V_{CC}	DC Supply Voltage		36	V
$V_{COMP\,/\,RT\,/\,CS}$	COMP / RT / CS Voltage		-0.3 ~ 7.0	V
P_D	Power Dissipation @ T_A=85℃ (*)		0.3	W
ESD	Human Body Model		4	KV
	Machine Model		300	V
T_{ope}	Operating Ambient Temperature		-40 ~ 85	℃
T_J	Operating Junction Temperature Range		-40 ~ 150	℃
T_{STG}	Storage Temperature Range		-40 ~ 150	℃
T_{LEAD}	Pb-Free Lead Soldering Temperature for 5 sec.		260	℃
$R_{\Theta JC}$	Thermal Resistance Junction – Case (*)	SOT-23-6L	210	℃/W
		DIP-8P	95	


(*) The power dissipation and thermal resistance are evaluated under copper board mounted with free air conditions.

ELECTRICAL CHARACTERISTICS


(T_A=25℃, V_{CC}=15V, unless otherwise specified.)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Supply Voltage (Vcc Pin)						
Istt	Startup Current			8	20	uA
Iop	Operating Current	VCOMP = 3V		2	4	mA
UVLO (off)	Min. Operating Voltage		9.0	10.0	11.0	V
UVLO (on)	Start Threshold Voltage		15.0	16.0	17.0	V
OVP Level	Over Voltage Protection		28		36	V
Voltage Feedback (Comp Pin)						
Isc	Short Circuit Current			2.2	3.0	mA
Vop	Open Loop Voltage			5.0		V
VTH(GM)	Green Mode Threshold VCOMP			2.35		V
Oscillator (RT Pin)						
FOSC	Frequency	RT=100KΩ	60.0	65.0	75.0	KHz
FOSC(GM)	Green Mode Frequency	Fs=65.0KHz		20		KHz
Fdt	Frequency Variation versus Temp. Deviation	(-40°C ~105°C)			3	%
Fdv	Frequency Variation versus VCC Deviation	(VCC=11V-25V)			1	%
Current Sensing (CS Pin)						
Vcs(off)	Maximum Input Voltage	SP6850BD8TG SP6850BS26RG	0.8	0.85	0.9	V
		SP6850AD8TG SP6850AS26RG	0.7	0.75	0.8	
Zcs	Input impedance			50		KΩ
TPD	Delay to Output			150		nS
Gate Driver Output (OUT Pin)						
DC (Max)	Maximum Duty Cycle		70	75	80	%
DC (Min)	Minimum Duty Cycle			0		%
VOL	Output Low Level	VCC=15V, Io=20mA			1	V
VOH	Output High Level	VCC=15V, Io=20mA	8			V
Tr	Rising Time	Load Cap=1000pF		50	200	nS
Tf	Falling Time	Load Cap=1000pF		30	120	nS


PERFORMANCE CHARACTERISTICS (T_A=25℃, unless otherwise specified.)

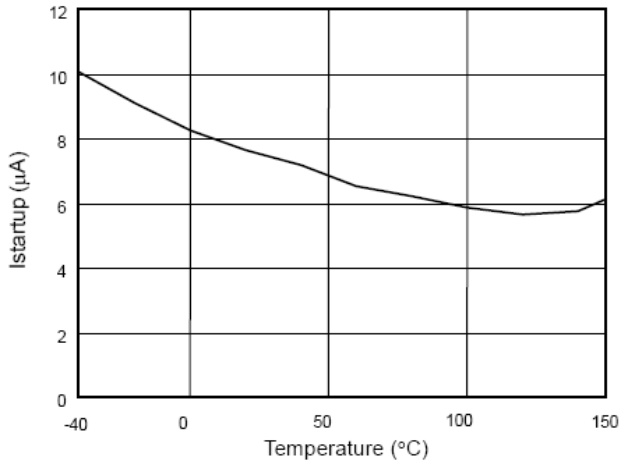


Startup Current (Istartup) vs. Temperature

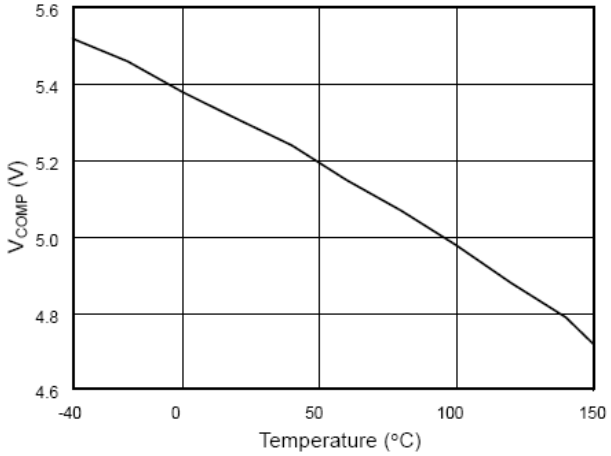

V_{COMP} open loop voltage v.s. Temperature

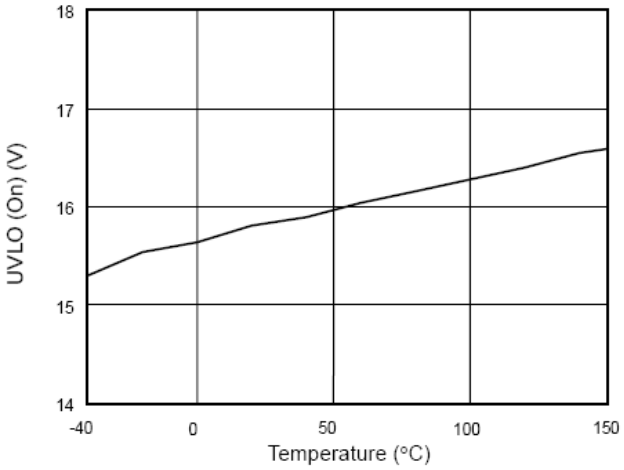


UVLO (On) vs. Temperature

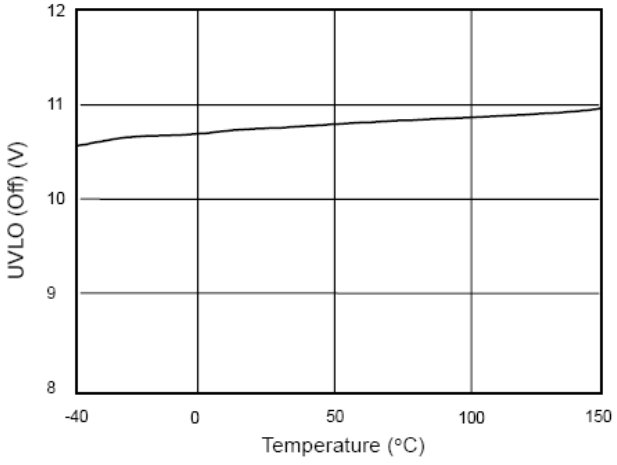


UVLO Off v.s. Temperature


PERFORMANCE CHARACTERISTICS (T_A=25℃, unless otherwise specified.)

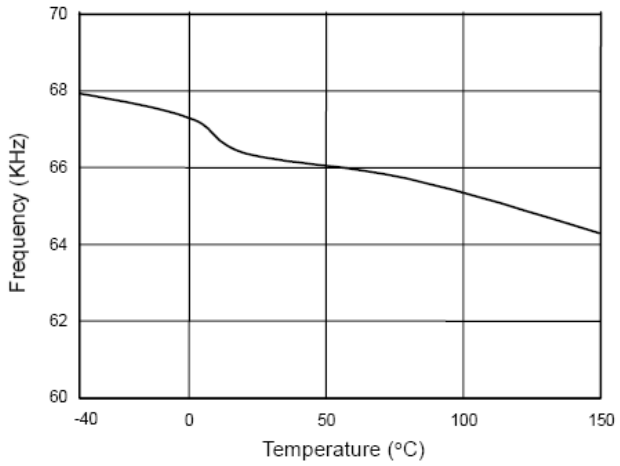


Frequency v.s. Temperature

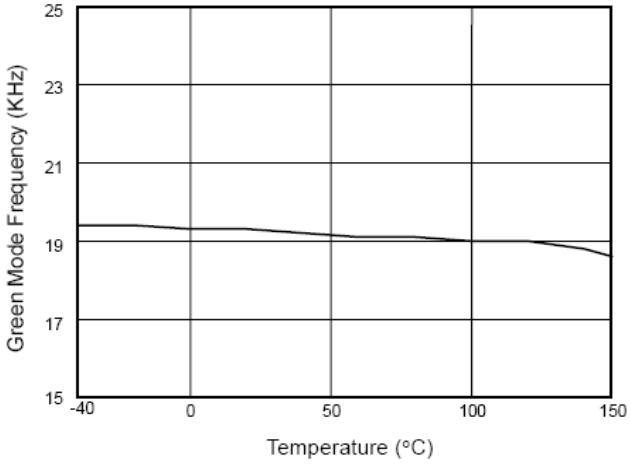

Green Mode Frequency v.s. Temperature

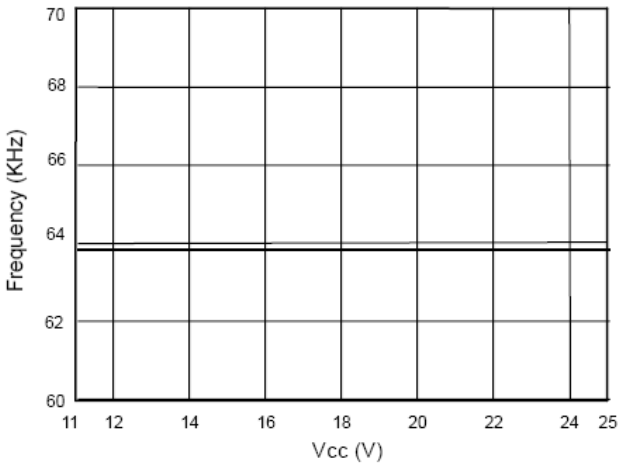


Frequency v.s. Vcc

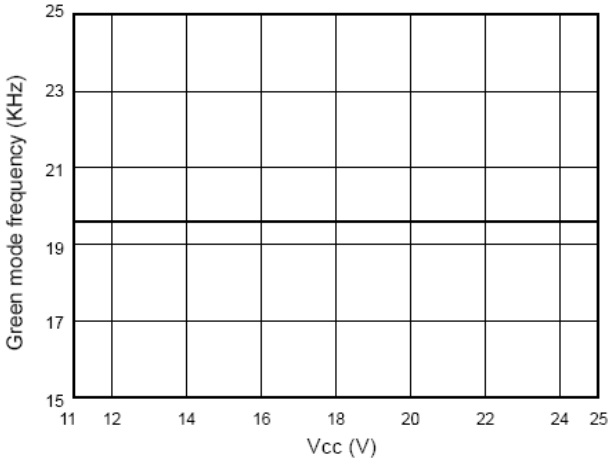


Green mode frequency v.s. Vcc

DIP- 8P PACKAGE OUTLINE

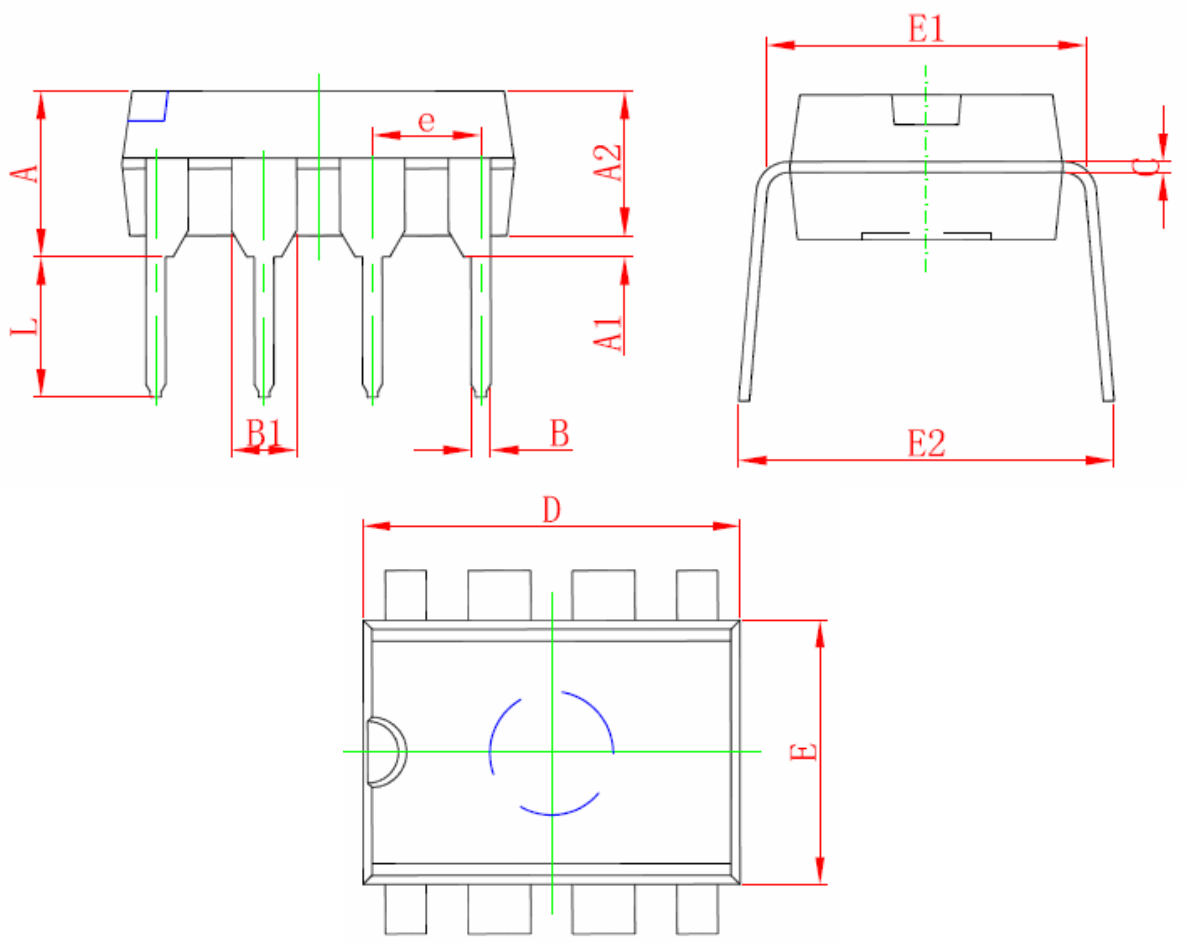

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.710	4.310	0.146	0.170
A1	0.510		0.020	
A2	3.200	3.600	0.126	0.142
B	0.380	0.570	0.015	0.022
B1	1.524 (BSC)		0.060 (BSC)	
C	0.204	0.360	0.008	0.014
D	9.000	9.400	0.354	0.370
E	6.200	6.600	0.244	0.260
E1	7.320	7.920	0.288	0.312
e	2.540 (BSC)		0.100 (BSC)	
L	3.000	3.600	0.118	0.142
E2	8.400	9.000	0.331	0.354

SOT-23-6L PACKAGE OUTLINE

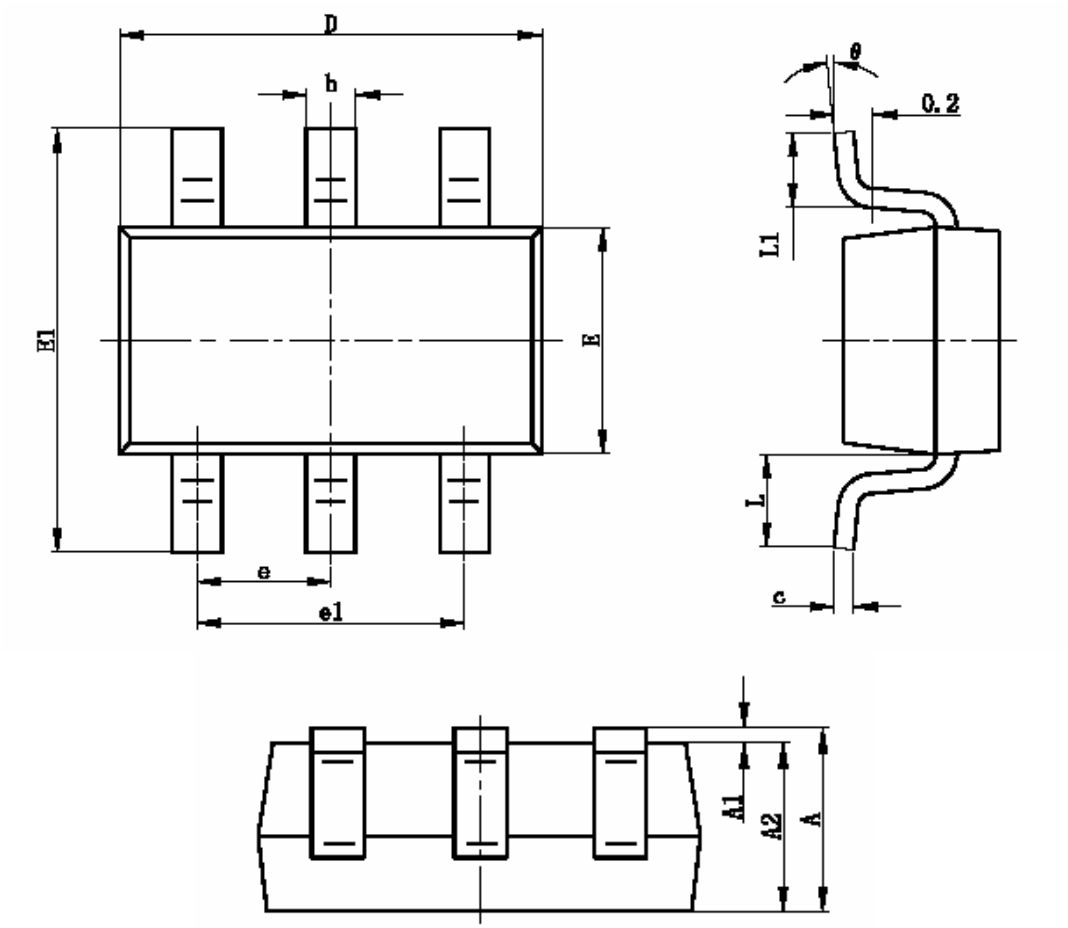

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.400	0.012	0.016
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.700REF		0.028REF	
L1	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Information provided is alleged to be exact and consistent. SYNC Power Corporation presumes no responsibility for the penalties of use of such information or for any violation of patents or other rights of third parties that may result from its use. No license is granted by allegation or otherwise under any patent or patent rights of SYNC Power Corporation. Conditions mentioned in this publication are subject to change without notice. This publication surpasses and replaces all information previously supplied. SYNC Power Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of SYNC Power Corporation.

©The SYNC Power logo is a registered trademark of SYNC Power Corporation
©2004 SYNC Power Corporation – Printed in Taiwan – All Rights Reserved
SYNC Power Corporation
9F-5, No.3-2, Park Street
NanKang District (NKSP), Taipei, Taiwan, 115, R.O.C
Phone: 886-2-2655-8178
Fax: 886-2-2655-8468
http://www.syncpower.com