


Extended length is with 500g of force

YELLOW GREEN RED BLACK

YELLOW GREEN RED BLACK

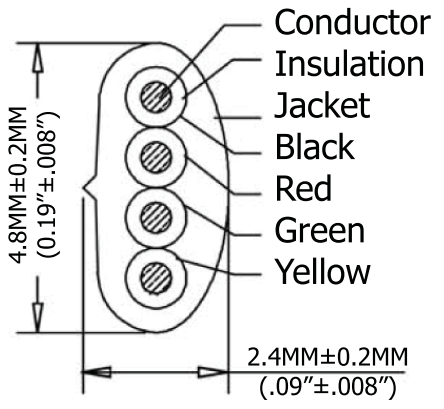

SEC:A-A

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	33.5 Inches
4,267.2MM-4,907.28MM	850.9MM

Material:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X4C):PP6331 ID 0.95-1.0
- Jacket: PVC NO UL 80P
- Package: Individual PE Bag



Scale	1:1							Name
TOLERANCE						Drawn	12.19.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
Modification					Date	Name		

Item No.
AT-K-C-26-4-B/25-R

Title NON-UL 26AWG (0.16/7)*4C,
O.D.: 2.4*4.8MM, Pre-Cut, 25Ft., Black

Drawing No.		rev00
Replace	Sheet	