


PARAMETER		UNITS
<sup>1</sup> Inductance	85.0 Min.	μH
<sup>1</sup> Leakage Inductance	0.25 Max.	μH
<sup>1</sup> Interwinding Capacitance	12 Max.	pF
Primary DC Resistance	0.30 Max.	Ω
Isolation (HI-POT)	500 Min.	V <sub>RMS</sub>
SRF (Ref.)	20	MHz
Insulation Resistance	10k Min.	MΩ
Power Rating	250	mW

# High Frequency Data Line Filter

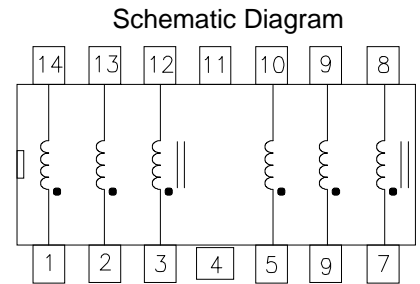


<sup>1</sup>Tested at 100KHz and 100 mV<sub>RMS</sub>  
 Inductance and Impedance specifications are -40°C TO +85°C

Turns ratio 1:1 + 5%

Current Rating: 100mA

## Physical Dimensions in inches (mm)

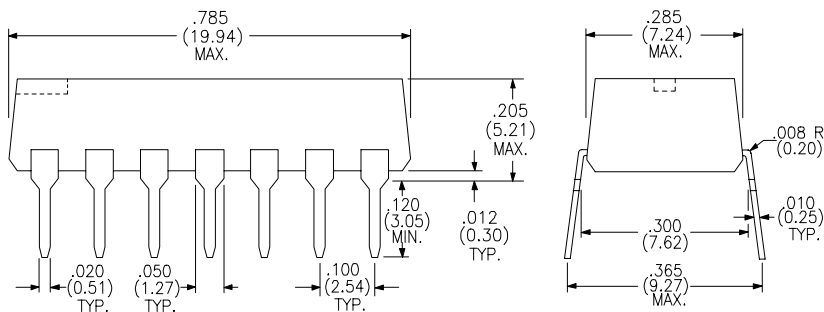

P/N F-127

3/2/97