


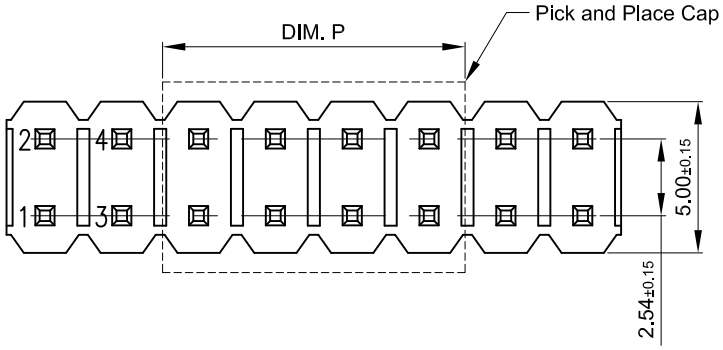




Tape & Reel packaging (with Pick and Place Cap) 350pcs per reel

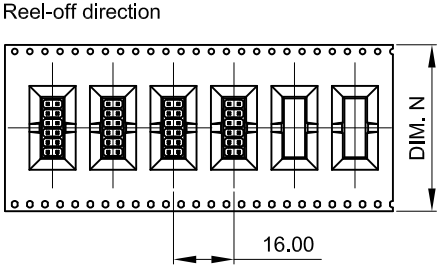

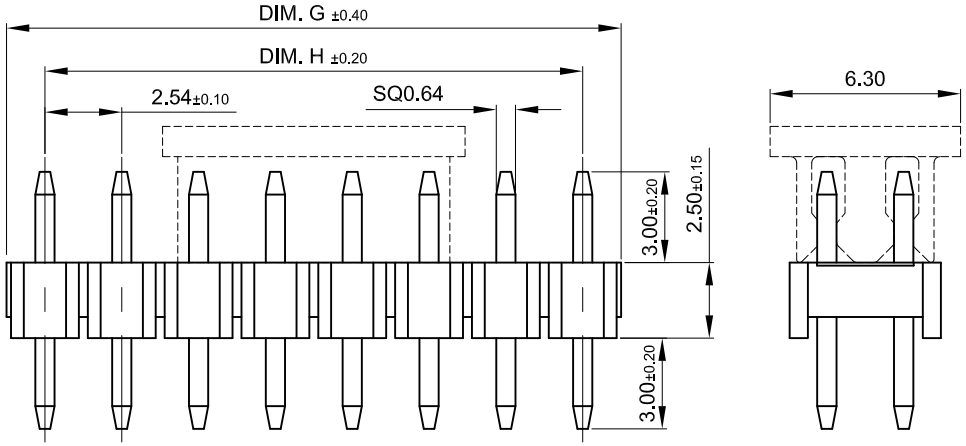


Notes:

Material and finish:
Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black

Specifications:
Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

PE Bag Packaging Q'ty	
20	300
18	500
16	500
14	500
12	500
10	1000
8	1000
6	1000
4	1000
No. of positions	Q'ty per tube

Tube Packaging Q'ty	
20	22
18	25
16	28
14	33
12	38
10	46
8	57
6	77
4	114
No. of positions	Q'ty per tube

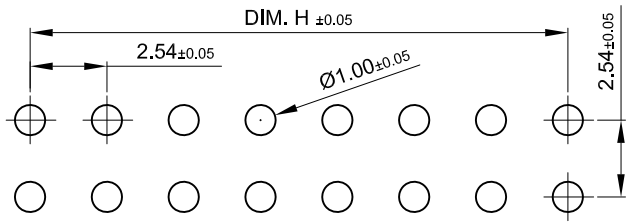

PCB Layout

Id-Nr. PE Bag 10u" gold plating	Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. PE Bag 0.8u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. N	DIM. P
129591	129582	129573	129564	129555	129546	20	25.40	22.86	44	10.00
129590	129581	129572	129563	129554	129545	18	22.86	20.32	44	10.00
129589	129580	129571	129562	129553	129544	16	20.32	17.78	44	10.00
129588	129579	129570	129561	129552	129543	14	17.78	15.24	44	10.00
129587	129578	129569	129560	129551	129542	12	15.24	12.70	32	10.00
129586	129577	129568	129559	129550	129541	10	12.70	10.16	32	10.00
129585	129576	129567	129558	129549	129540	8	10.16	7.62	24	7.00
129584	129575	129566	129557	129548	129539	6	7.62	5.08	24	7.00
129583	129574	129565	129556	129547	129538	4	5.08	2.54	24	7.00

Information:	Tolerances X. ±0.50 X°. ±10° X.X ±0.40 X.X° ±5° X.XX ±0.25 X.XX° ±3°	All Dimensions in mm	Scale 4:1 For further information about I. D. number see manufacturing document
All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using	Subject to modification without prior notice. Drawing will not be updated.		Designation 2.54mm Vertical Dual Row Header THR
	ERNI Asia Holding www.erni.com		129537
A 13-08-2013 Rev. Date			129537.DWG