

VICOR CONFIDENTIAL

THIS DOCUMENT AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED, USED, OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT PERMISSION OF VICOR CORP.

REV.	DESCRIPTION		DATE	APPROVED
01	RELEASED PER E980365	DPK	9/14/98	RCM
02	REVSD- E980451	RCM	12/1/98	DPK
03	REVSD PER E990386	AK	9/14/99	RCM
04	REVSD PER E990450	RCM	3/6/00	DPK

VICOR HUB PART NO.	MATING CONNECTOR		
	ORDER FROM: AMP		ORDER FROM: VICOR
	HOUSING (QTY 1)	PINS (QTY 2)	HOUSING/PINS KIT (QTY 1)
HUB270-P	770017-1	770248-1	21395

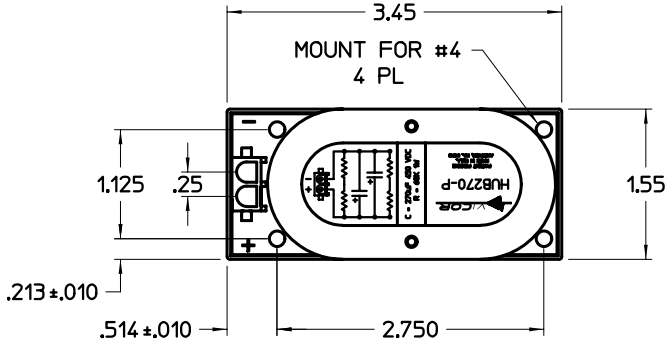

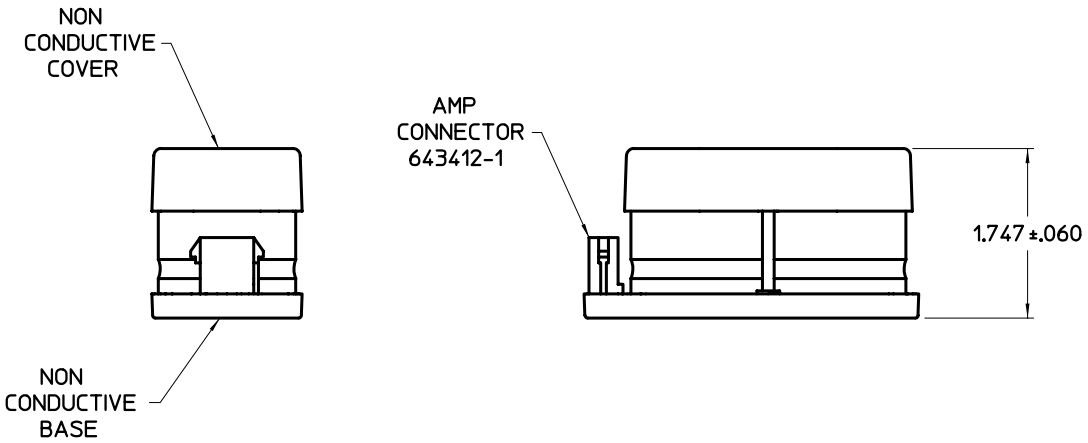

AT +105°C, 120HZ UNLESS OTHERWISE NOTED						
ITEM	CHARACTERISTICS					
OPERATING TEMPERATURE	-25 to +105°C					
CAPACITANCE TOLERANCE @+20°C	±20%					
	AMBIENT TEMPERATURE(°C)					
	+45	+60	+70	+85	+105	
RIPPLE CURRENT MULTIPLIER	2.64	2.23	2.12	1.73	1.00	
DISSIPATION FACTOR @ +20°C	0.1					
RATED VOLTAGE (WVDC)	200					
CAPACITANCE VALUE (C1, C2 EA. uF)	270					
MAXIMUM ESR (OHMS) @ +20°C	0.931					
MAXIMUM RIPPLE CURRENT (A rms)	1.17					

DRAWN BY	DATE
D.CVINAR	1/2/98

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES-TOLERANCES ARE: FRACTIONS ±1/64 DECIMALS .XX±.01 .XXX±.005 ANGLES ±1°

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING

VICOR

OUTLINE DRAWING, HUB270-P

SIZE	FSCM NO.	DWG NO	REV
C	67131	16768	04

SCALE FULL SHEET 1 OF 1