


551-5169 R F Choke, moulded, axial, .022μH thru .1μH.

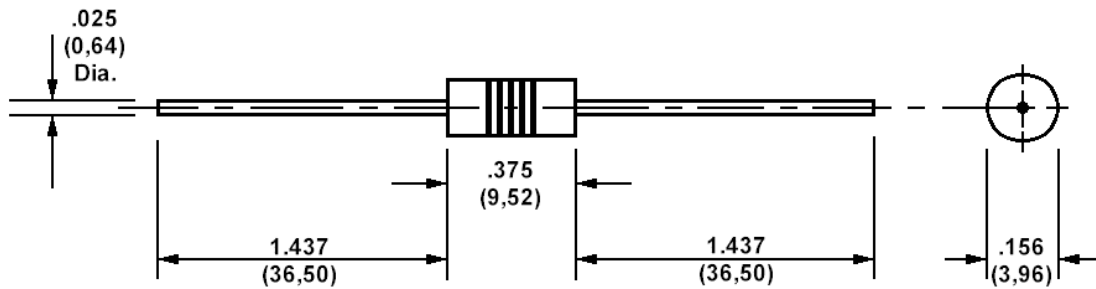

How to order code

551-5169-XX-YY-ZZ

Basic Part No (XX = Inductance identifier, YY = tolerance, ZZ = packaging)

Basic Part No.	XX	Inductance	Colour Code			Q Min.	Test Freq. (MHz)	DCR Max. (W)	DC Max. (mA)	SRF Min. (MHz)
			A	B	C					
551-5169	-01	22nH	Black	Red	Red	45	30	.0094	5400	940
	-02	27nH	Black	Red	Violet	45	30	.011	5000	940
	-03	39nH	Black	Orange	White	45	25	.013	4600	850
	-04	56nH	Black	Green	Blue	45	25	.015	4300	730
	-05	68nH	Black	Blue	Grey	45	25	.018	3900	660
	-06	82nH	Black	Grey	Red	45	25	.019	3800	620
	-07	μH10	Brown	Black	Black	45	25	.021	3600	600

TOLERANCE (YY)

-02	±10%	Silver
-----	------	--------

PACKAGING (ZZ)

-00	Loose
-36	Taped

Temperature range: -55°C to +125°C