


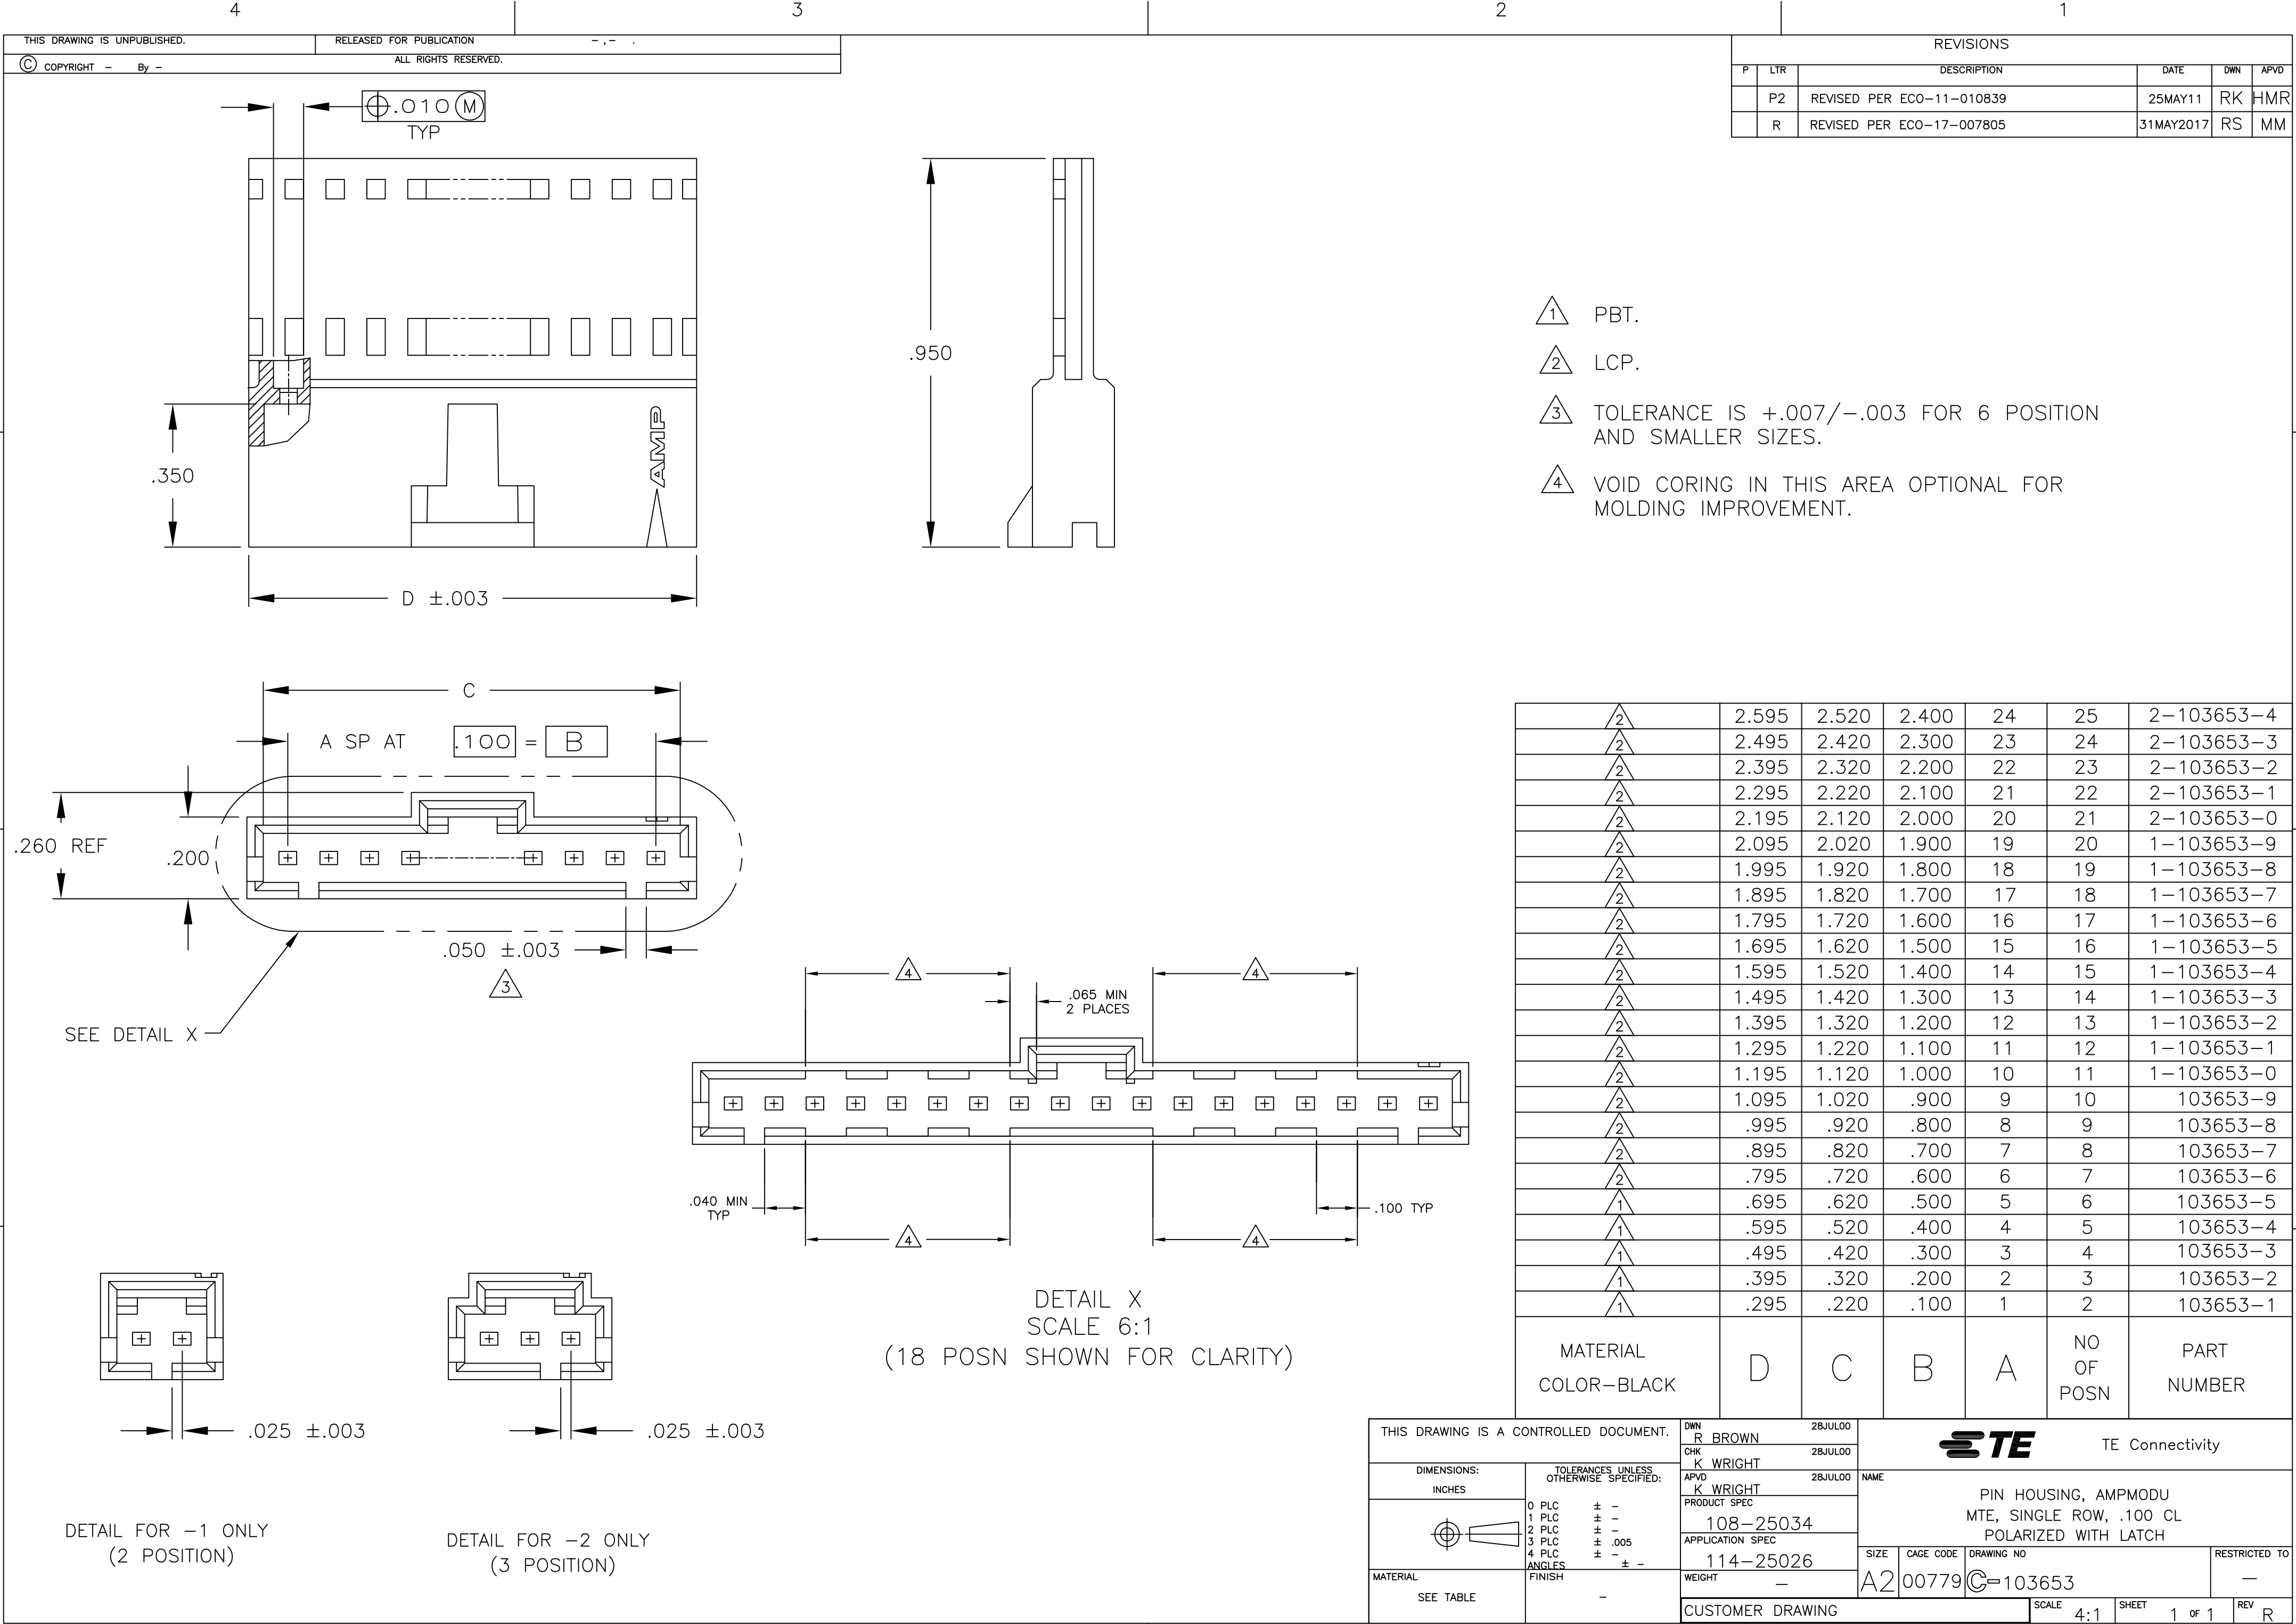

- 1 PBT.
- 2 LCP.
- 3 TOLERANCE IS  $+.007/-0.003$  FOR 6 POSITION AND SMALLER SIZES.
- 4 VOID CORING IN THIS AREA OPTIONAL FOR MOLDING IMPROVEMENT.

|                         |       |       |       |    |                  |                |
|-------------------------|-------|-------|-------|----|------------------|----------------|
| 2                       | 2.595 | 2.520 | 2.400 | 24 | 25               | 2-103653-4     |
| 2                       | 2.495 | 2.420 | 2.300 | 23 | 24               | 2-103653-3     |
| 2                       | 2.395 | 2.320 | 2.200 | 22 | 23               | 2-103653-2     |
| 2                       | 2.295 | 2.220 | 2.100 | 21 | 22               | 2-103653-1     |
| 2                       | 2.195 | 2.120 | 2.000 | 20 | 21               | 2-103653-0     |
| 2                       | 2.095 | 2.020 | 1.900 | 19 | 20               | 1-103653-9     |
| 2                       | 1.995 | 1.920 | 1.800 | 18 | 19               | 1-103653-8     |
| 2                       | 1.895 | 1.820 | 1.700 | 17 | 18               | 1-103653-7     |
| 2                       | 1.795 | 1.720 | 1.600 | 16 | 17               | 1-103653-6     |
| 2                       | 1.695 | 1.620 | 1.500 | 15 | 16               | 1-103653-5     |
| 2                       | 1.595 | 1.520 | 1.400 | 14 | 15               | 1-103653-4     |
| 2                       | 1.495 | 1.420 | 1.300 | 13 | 14               | 1-103653-3     |
| 2                       | 1.395 | 1.320 | 1.200 | 12 | 13               | 1-103653-2     |
| 2                       | 1.295 | 1.220 | 1.100 | 11 | 12               | 1-103653-1     |
| 2                       | 1.195 | 1.120 | 1.000 | 10 | 11               | 1-103653-0     |
| 2                       | 1.095 | 1.020 | .900  | 9  | 10               | 103653-9       |
| 2                       | .995  | .920  | .800  | 8  | 9                | 103653-8       |
| 2                       | .895  | .820  | .700  | 7  | 8                | 103653-7       |
| 2                       | .795  | .720  | .600  | 6  | 7                | 103653-6       |
| 1                       | .695  | .620  | .500  | 5  | 6                | 103653-5       |
| 1                       | .595  | .520  | .400  | 4  | 5                | 103653-4       |
| 1                       | .495  | .420  | .300  | 3  | 4                | 103653-3       |
| 1                       | .395  | .320  | .200  | 2  | 3                | 103653-2       |
| 1                       | .295  | .220  | .100  | 1  | 2                | 103653-1       |
| MATERIAL<br>COLOR-BLACK | D     | C     | B     | A  | NO<br>OF<br>POSN | PART<br>NUMBER |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:  
INCHES

MATERIAL  
SEE TABLE

-

TOLERANCES UNLESS  
OTHERWISE SPECIFIED:

0 PLC ± -  
1 PLC ± -  
2 PLC ± -  
3 PLC ± .005  
4 PLC ± -  
ANGLES ± -  
FINISH

-

DWN  
R BROWN  
28JUL00

CHK  
K WRIGHT  
28JUL00

APVD  
K WRIGHT  
28JUL00

PRODUCT SPEC  
108-25034

APPLICATION SPEC  
114-25026

WEIGHT  
-

CUSTOMER DRAWING

TE Connectivity

NAME  
PIN HOUSING, AMPMODU  
MTE, SINGLE ROW, .100 CL  
POLARIZED WITH LATCH

SIZE  
A2

CAGE CODE  
00779

DRAWING NO  
C=103653

RESTRICTED TO  
-

SCALE  
4:1

SHEET  
1 of 1

REV  
R