


1. Mechanical Dimensions:

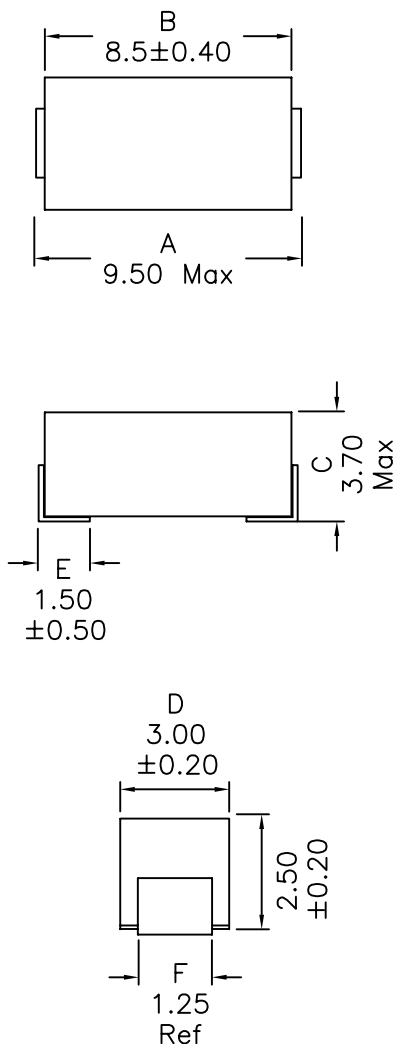


Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Electrical and mechanical specifications 100% tested
10. RoHS Compliant Component


DOC. REV: A/5

2. Schematic:



3. Electrical Specifications: @25°C

Impedance: 60 Ohms±20% @25MHz
 Impedance: 90±20% Ohms @100MHz
 DC Res.: 0.90 mOhms Max

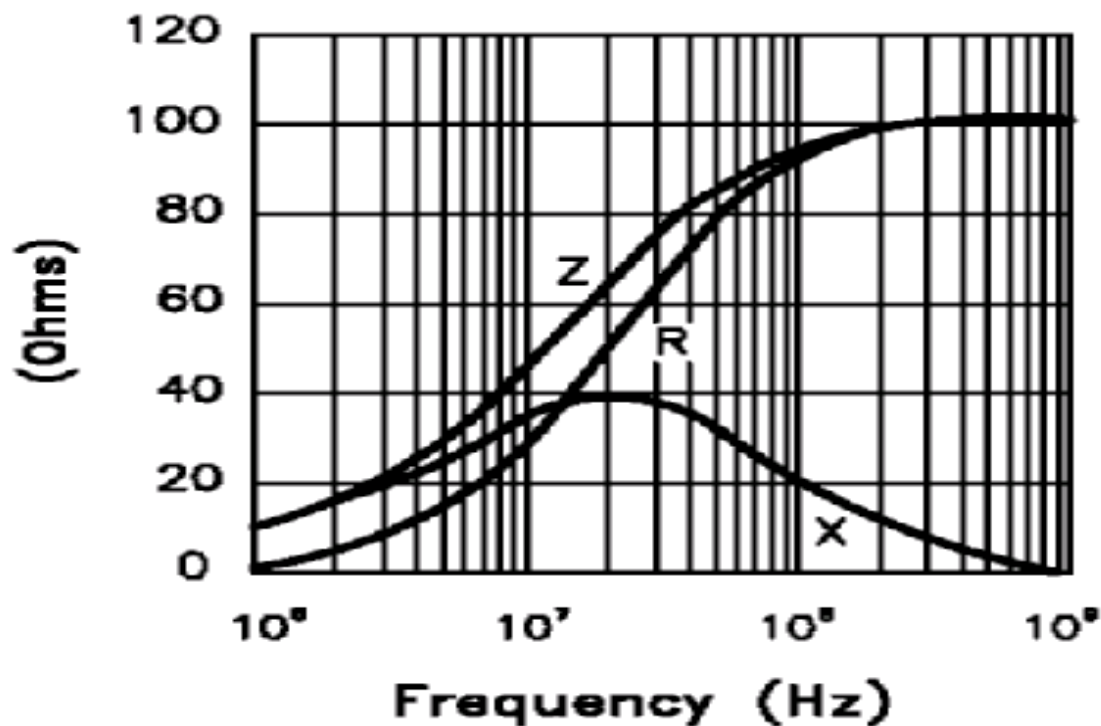

XFMRs Inc www.XFMRS.com		Title: SURFACE MOUNT BEADS	
UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in MM	P/N: XFBPH-C8-853025	REV A	
	DWN.	Feng	Nov-24-10
	CHK.	YK Liao	Nov-24-10
SHT 1 OF 1	APP.	BW	Nov-24-10