

Hermetic Infrared Emitting Diode


OP123, OP124

OP223, OP224



Features:

- Hermetically sealed package
- Mechanically and spectrally matched to other OPTEK devices
- Designed for direct mount to PCBoard

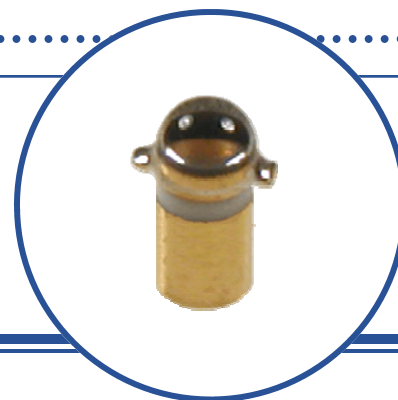

Description:

Each **OP123** and **OP124** device is a 935 nanometer (nm) high intensity gallium arsenide infrared emitting diode (GaAs), mounted in a miniature hermetically sealed “pill” package with an enhanced temperature range and a high power output. These devices are designed for direct mounting to PCBoards.

Each **OP223** and **OP224** device is an 890 nm gallium aluminum arsenide infrared emitting diode (GaAlAs), mounted in a hermetically sealed “pill” package with an enhanced temperature range and a narrow irradiance pattern that provides high on-axis intensity for excellent coupling efficiency. These devices offer significantly higher power output than GaAs at equivalent drive currents and have a wavelength that is matched to silicon’s peak response. Their small package size permits high device density mounting.

All these LEDs are mechanically and spectrally matched to the OP300 series, OP600 series and OP640 series devices.

Please refer to Application Bulletins 208 and 210 for additional design information and reliability (degradation) data, and to Application Bulletin 202 for pill-type soldering to PCBoard.

Applications:


- Non-contact reflective object sensor
- Assembly line automation
- Machine automation
- Machine safety
- End of travel sensor
- Door sensor

Ordering Information		
Part Number	LED Peak Wavelength	Total Beam Angle
OP123	935 nm	24°
OP124		
OP223	890 nm	
OP224		



RoHS

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

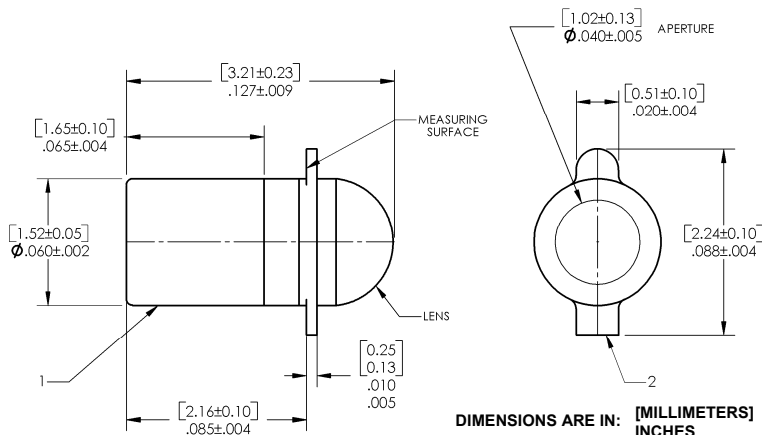

DIMENSIONS ARE IN: [MILLIMETERS]
INCHES



Pin #	LED	Sensor
1	Anode	Collector
2	Cathode	Emitter

Hermetic Infrared Emitting Diode

OP123, OP124

OP223, OP224



Absolute Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Storage Temperature Range	-65° C to +150° C
Operating Temperature Range	-65° C to +125° C
Reverse Voltage	2.0 V
Continuous Forward Current	100 mA
Peak Forward Current (2 μ s pulse with 0.1% duty cycle)	1.0 A
Lead Soldering Temperature [1/16 inch (1.6 mm) from case for 5 seconds with soldering iron]	260° C ⁽¹⁾⁽²⁾
Power Dissipation	150 mW ⁽³⁾

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
--------	-----------	-----	-----	-----	-------	-----------------

Input Diode

E_E (APT) ⁽³⁾	Apertured Radiant Incidence					
	OP123	0.40	-	-	mW/cm ²	I_F = 50 mA ⁽⁴⁾
	OP124	1.00	-	-		
	OP223	1.00	-	-		
	OP224	3.50	-	-		
V_F	Forward Voltage				V	I_F = 50 mA
	OP123	-	-	1.50		
	OP124	-	-	1.80		
I_R	Reverse Current	-	-	100	μA	V_R = 2.0 V
λ_P	Wavelength at Peak Emission					
	OP123, OP124	-	935	-	nm	I_F = 50 mA
	OP223, OP224	-	890	-		I_F = 10 mA
B	Spectral Bandwidth between Half Power Points					
	OP123, OP124	-	50	-	nm	I_F = 50 mA
	OP223, OP224	-	80	-		I_F = 10 mA
$\Delta\lambda_P/\Delta T$	Spectral Shift with Temperature					
	OP123, OP124	-	+0.30	-	nm/°C	I_F = Constant
	OP223, OP224	-	+0.18	-		
θ_{HP}	Emission Angle at Half Power Points	-	24	-	Degree	I_F = 50 mA
t_r	Output Rise Time					
	OP123, OP124	-	1000	-	ns	$I_{F(PK)}$ =100 mA, PW=10 μs, and D.C.=10.0%
	OP223, OP224	-	500	-		
t_f	Output Fall Time					
	OP123, OP124	-	500	-	ns	
	OP223, OP224	-	250	-		

Notes:

1. Refer to Application Bulletin 202 which reviews proper soldering techniques for pill-type devices.
2. No clean or low solids. RMA flux is recommended. Duration can be extended to 10 seconds maximum when flow soldering.
3. Derate linearly 1.50 mW/°C above 25° C.
4. For OP123, OP124, OP223 and OP224, $E_{E(APT)}$ is a measurement using a 0.031" (0.787 mm) diameter apertured sensor placed 0.50" (12.7 mm) from the measuring surface. $E_{E(APT)}$ is not necessarily uniform within the measured area.

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Hermetic Infrared Emitting Diode


OP123, OP124

OP223, OP224




OP123, OP124


Forward Voltage vs Forward Current vs Temperature

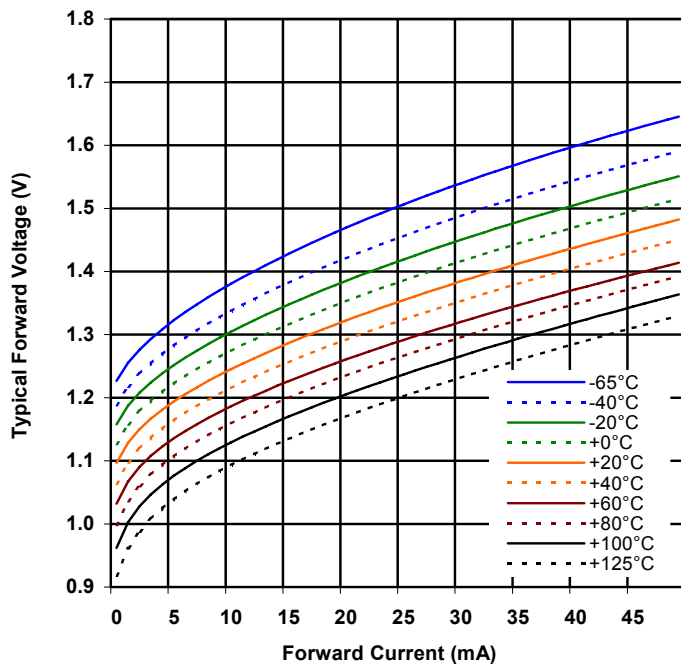


Optical Power vs I_F vs Temp

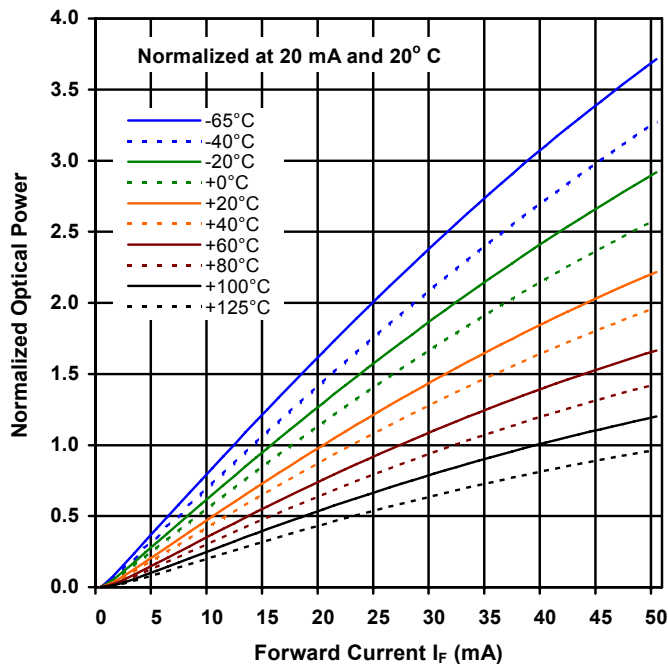

Distance vs Output Power vs Forward Current

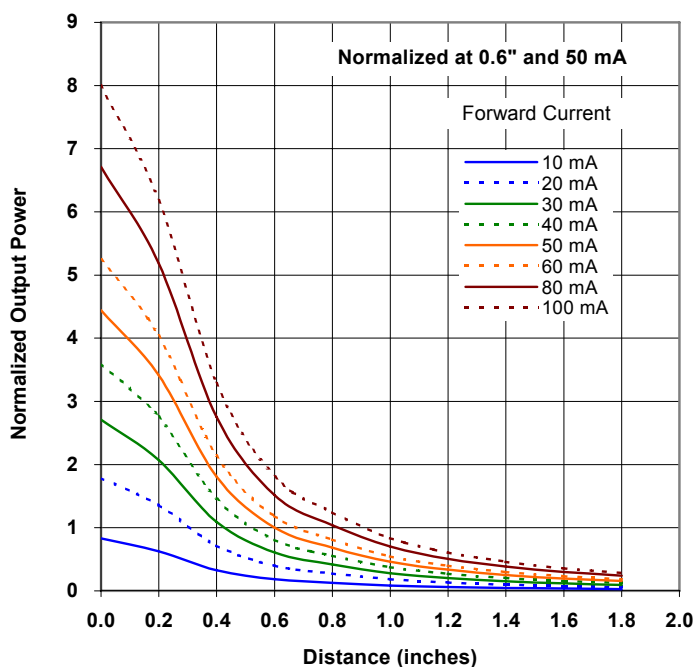

Normalized Intensity vs Beam Angle

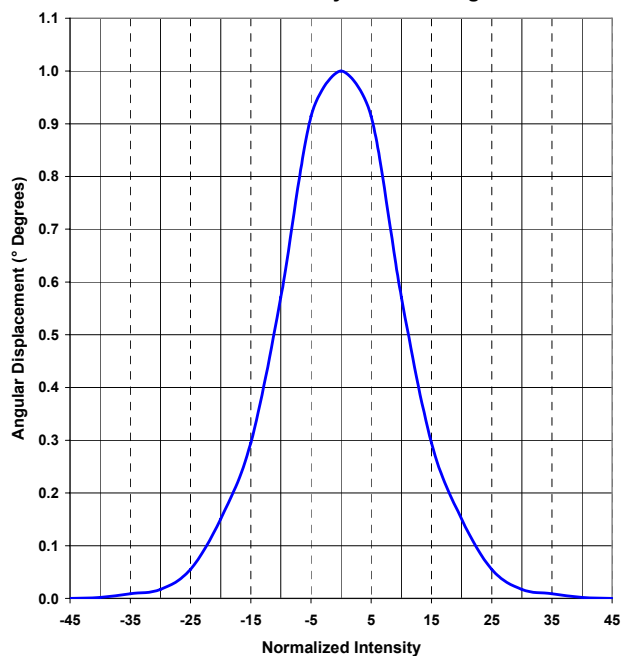

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.

Hermetic Infrared Emitting Diode


OP123, OP124

OP223, OP224




OP223, OP224


Forward Voltage vs Forward Current vs Temperature

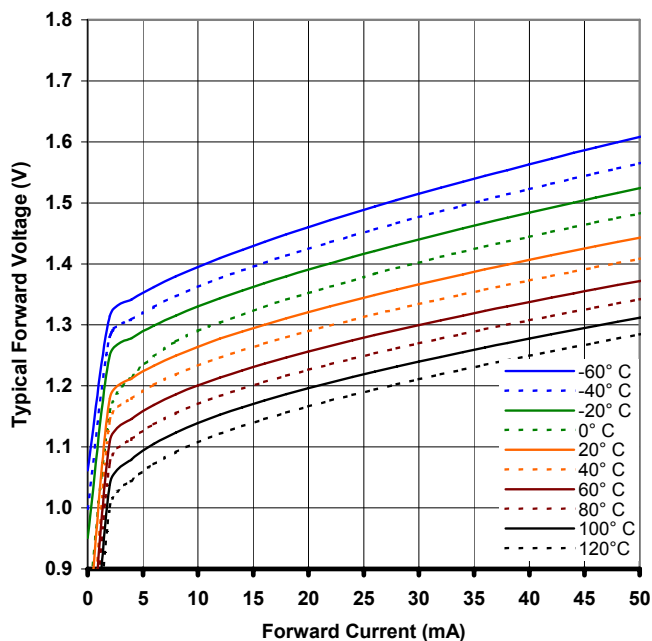


Optical Power vs I_F vs Temperature

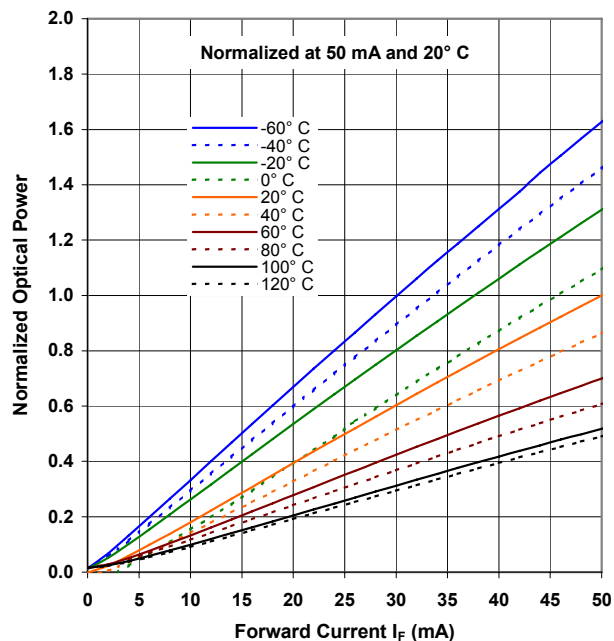

Distance vs Output Power vs Forward Current

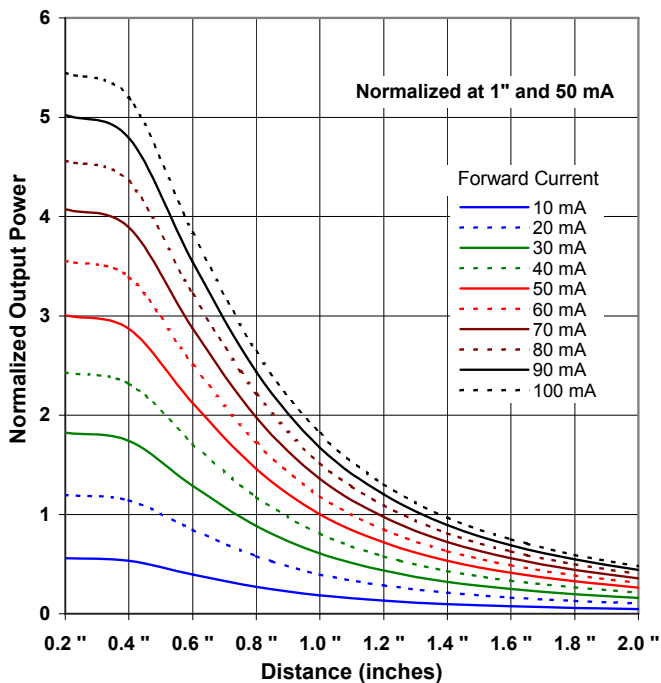

Normalized Intensity vs Beam Angle

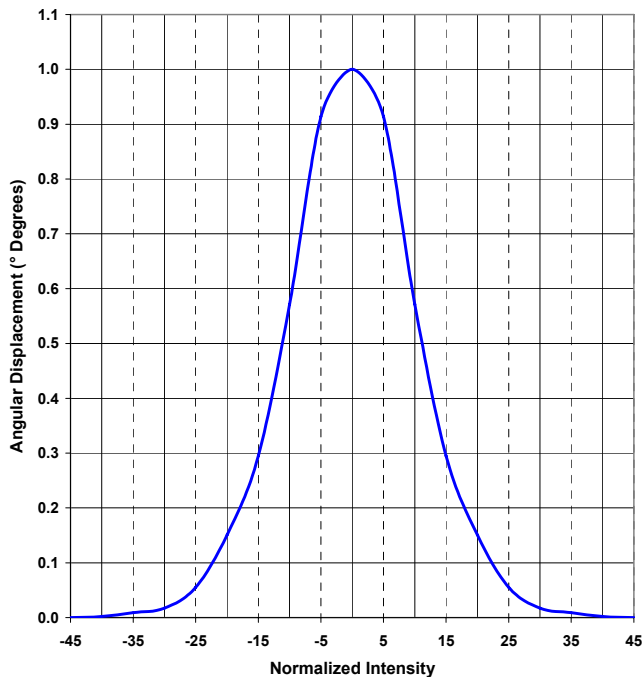

OPTEK reserves the right to make changes at any time in order to improve design and to supply the best product possible.