
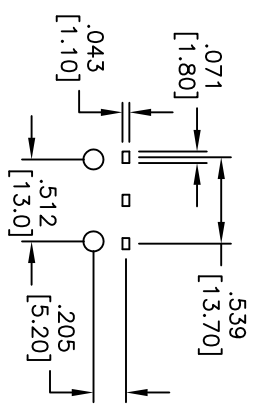
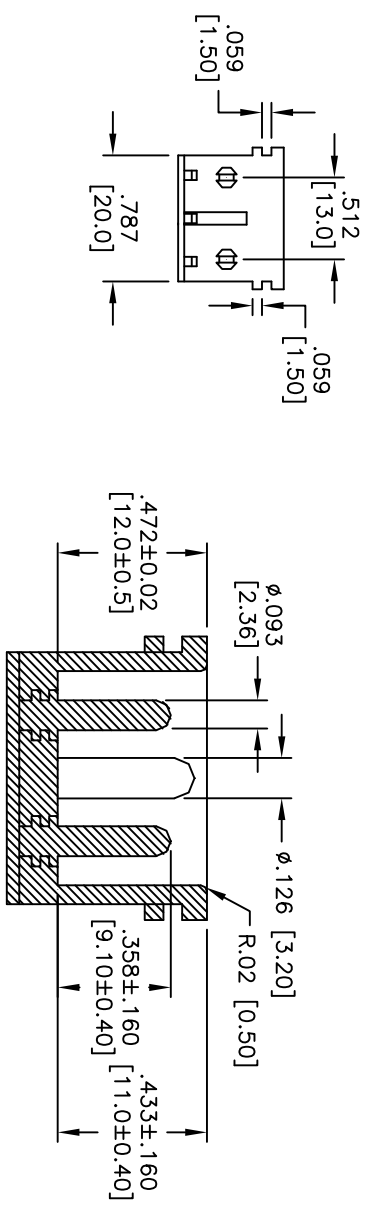


APPROVED: _____ TITLE: _____
 DATE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/07	
A		REVISED DIM.	8/26/09	

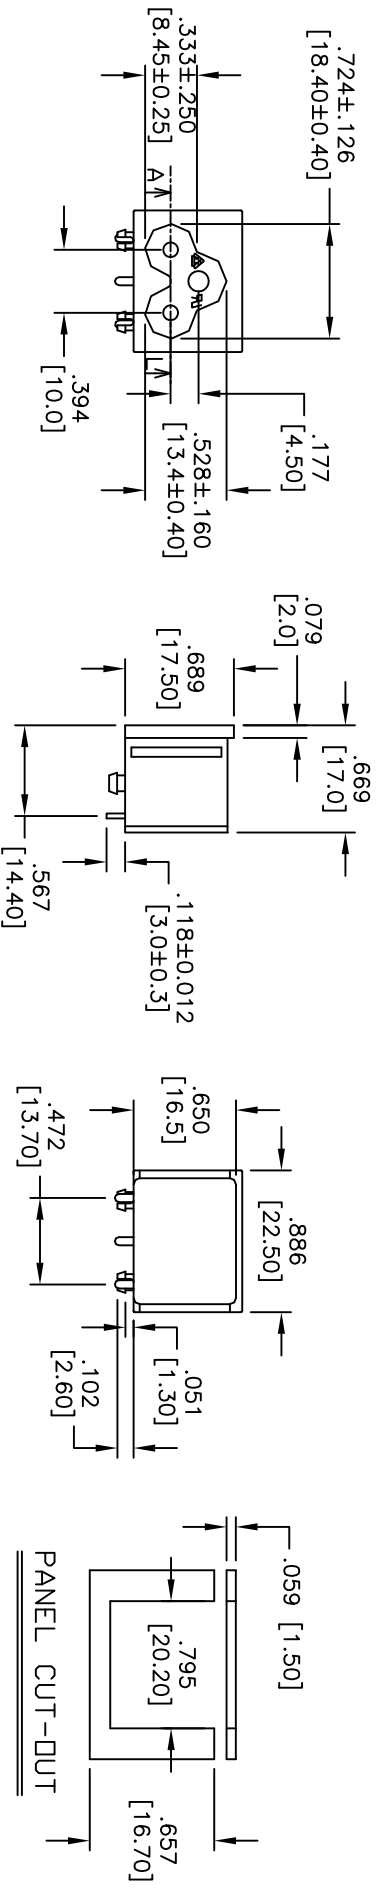

PCB LAYOUT

SPECIFICATIONS:

Material: Insulator: Nylon 66, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze, Tin Plated

Electrical: Operation voltage: 250 VAC max
 Current rating: 2.5 Amps max

Insulation resistance: 100 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 2000 VAC for 1 minute

Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010
APPROVALS	DATE
DRAWN	SHIREN
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IEC 60320, C6, RIGHT ANGLE, PCB TERMINAL, PANEL MOUNT

SIZE: X PART NO.: IEC-NH4

REF: S00037T SCALE: NTS SHEET 1 OF 1

