


EPZ3074E

- Class 130 Insulating System
- UL 94V-0 Recognized Components
- UL 1446 Class B Insulation System
- Operating Temperature : -20°C to +85°C


Electrical Parameters @ 25° C

| Inductance (μ H Min.) | Rated Current (Amps) | Rated Voltage (Vrms) | DCR (Max.) | HiPot (Vrms, 1 Sec.) | |
|-------------------------------|-------------------------|-------------------------|----------------|-------------------------|-----------------|
| @ 1 KHz, 1 Vrms | | @ 50 / 60 Hz | 1-2, 3-4 | Winding to Winding | Winding to Core |
| 700 | 15 | 250 | .0075 | 1500 | 500 |

Package

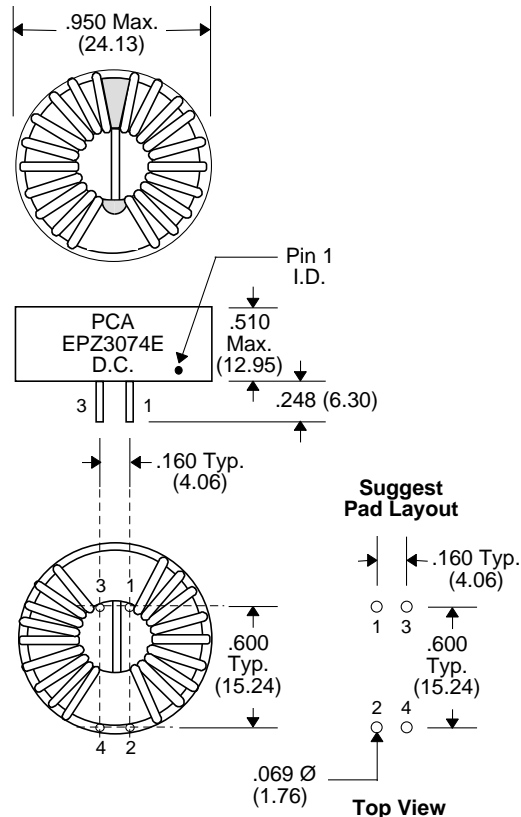

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25