
SKNH 91

THYRISTOR BRIDGE,SCR,BRIDGE

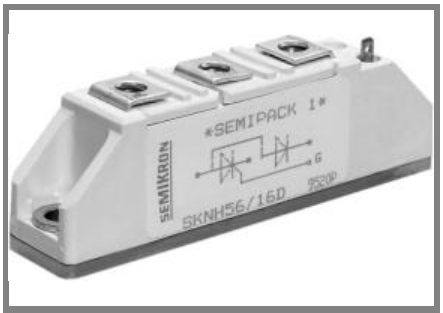

SEMIPACK® 1

Modules with Thyristor and Free-Wheeling Diode

SKNH 91

Features

- Heat transfer through ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized, file no. E 63 532
- Electrical data see also data sheet SKKH 92

Typical Applications

- Special modules for DC braking of AC induction motor

1) available on request

V_{RSM} V	V_{RRM}, V_{DRM} V	I_{TRMS} = 150 A (maximum value for continuous operation) I_{TAV} = 95 A (sin. 180; T_c = 85 °C)		
1300	1200	SKNH 91/12E		
1500	1400	SKNH 91/14E		
1700	1600	SKNH 91/16E		
1900	1800	SKNH 91/18E 1)		


Symbol	Conditions	Values	Units
I_{TAV}	sin. 180; T_c = 85 (100) °C;	95 (68)	A
I_{TSM}	T_{vj} = 25 °C; 10 ms	2000	A
	T_{vj} = 125 °C; 10 ms	1750	A
i²t	T_{vj} = 25 °C; 8,3 ... 10 ms	20000	A²s
	T_{vj} = 125 °C; 8,3 ... 10 ms	15000	A²s
V_T	T_{vj} = 25 °C; I_T = 300 A	max. 1,65	V
$V_{T(TO)}$	T_{vj} = 125 °C	max. 0,9	V
r_T	T_{vj} = 125 °C	max. 2	mΩ
I_{DD}; I_{RD}	T_{vj} = 125 °C; V_{RD} = V_{RRM}; V_{DD} = V_{DRM}	max. 20	mA
t_{gd}	T_{vj} = 25 °C; I_G = 1 A; di_G/dt = 1 A/µs	1	µs
t_{gr}	V_D = 0,67 * V_{DRM}	2	µs
$(di/dt)_{cr}$	T_{vj} = 125 °C	max. 150	A/µs
$(dv/dt)_{cr}$	T_{vj} = 125 °C	max. 1000	V/µs
t_q	T_{vj} = 125 °C ,	100	µs
I_H	T_{vj} = 25 °C; typ. / max.	/ 250	mA
I_L	T_{vj} = 25 °C; R_G = 33 Ω; typ. / max.	/ 600	mA
V_{GT}	T_{vj} = 25 °C; d.c.	min. 3	V
I_{GT}	T_{vj} = 25 °C; d.c.	min. 150	mA
V_{GD}	T_{vj} = 125 °C; d.c.	max. 0,25	V
I_{GD}	T_{vj} = 125 °C; d.c.	max. 6	mA
$R_{th(j-c)}$	cont.; per thyristor / per module	0,28 / 0,14	K/W
$R_{th(j-c)}$	sin. 180; per thyristor / per module	0,3 / 0,15	K/W
$R_{th(j-c)}$	rec. 120; per thyristor / per module	0,32 / 0,16	K/W
$R_{th(c-s)}$	per thyristor / per module	0,2 / 0,1	K/W
T_{vj}		- 40 ... + 125	°C
T_{stg}		- 40 ... + 125	°C
V_{isol}	a. c. 50 Hz; r.m.s.; 1 s / 1 min.	3600 / 3000	V~
M_s	to heatsink	5 ± 15 %	Nm
M_t	to terminals	5 ± 15 %	Nm
a		5 * 9,81	m/s²
m	approx.	120	g
Case		A 7	




SKNH

 © by SEMIKRON

Dimensions in mm

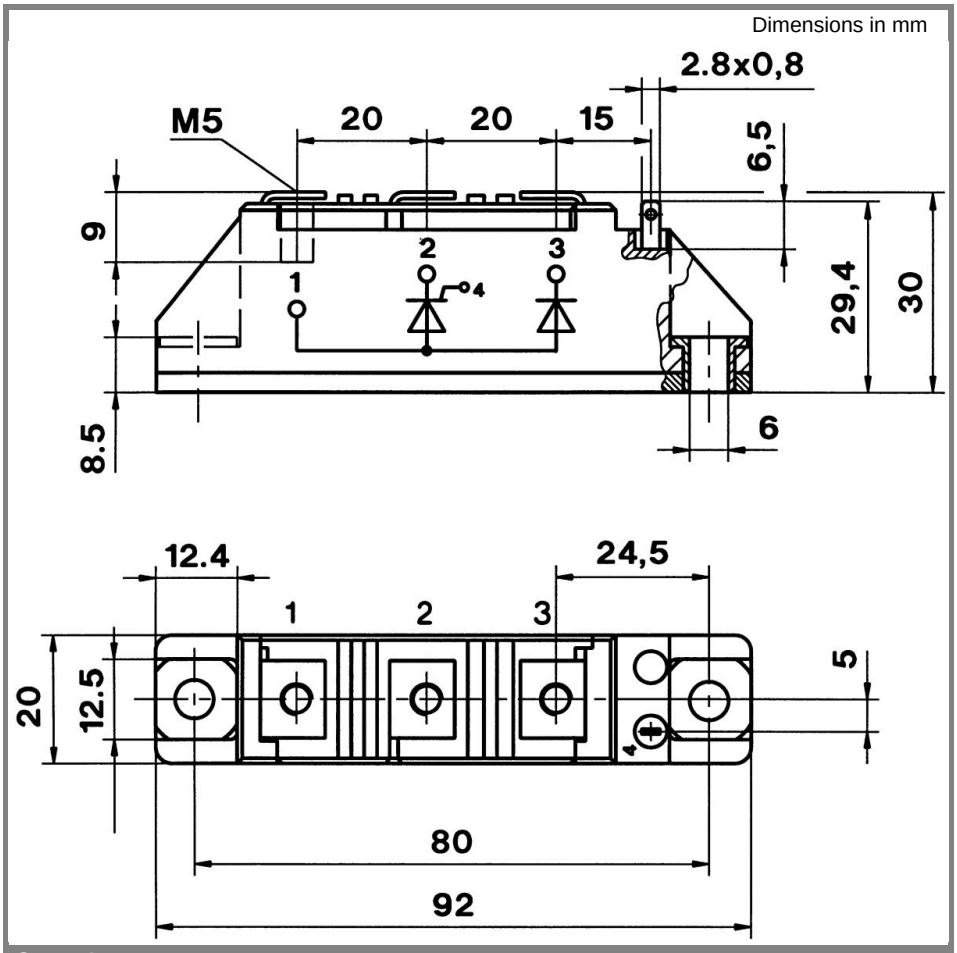

Case A 7

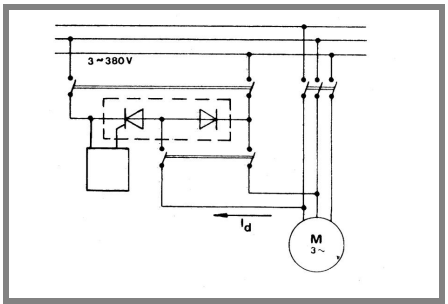

Typical application

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

 © by SEMIKRON