

SMT06C Series

C-Class Non-Isolated

Data Sheet

Total Power: 20 Watts
Input Voltage: 4.5 - 13.8 Vdc
of Outputs: Single

SPECIAL FEATURES

- 6 A current rating
- Input voltage range: 4.5 - 5.5 Vdc or 10.2 - 13.8 Vdc
- Output voltage: 0.9 - 3.3 / 5.0 V
- Industry-leading value
- Cost optimized design
- Excellent transient response
- Output voltage adjustability
- Path for future upgrades
- Supports silicon voltage migration
- Reduced design-in and qual time
- Designed-in reliability: MTBF of 7 million hours per Telcordia SR-332
- Available RoHS compliant
- Two year warranty

SAFETY

- UL, cUL CAN/CSA 22.2 No. 60950
- TÜV Product Service (EN60950:2000)
- CB report and certificate



Electrical Specifications

Input		
Input voltage range	5 V input model 12 V input model	4.5 - 5.5 Vdc 10.2 - 13.8 Vdc
Input current	Minimum load Remote OFF	50 mA 5 mA
Input current (max.) (See Note 8)	5 V input model 12 V input model	5.1 A max. @ I _o max. 1.6 A @ I _o max.
Input reflected ripple (See Note 2)	5 V input model 12 V input model	52 mA (pk-pk) 56 mA (pk-pk)
Remote ON/OFF Logic compatibility ON OFF		Active high >2.4 Vdc <0.8 Vdc
Start-up time (See Note 3)	Power up Remote ON/OFF	<20 ms <20 ms
Turn ON threshold	5 V _{in} 12 V _{in}	4.5 Vdc 9.3 Vdc
Turn OFF threshold	5 V _{in} 12 V _{in}	4.3 Vdc 7.8 Vdc
Output		
Voltage adjustability (See Note 6)	5 V input model 12 V input model	0.9 - 3.3 Vdc 0.9 - 5.0 Vdc
Output setpoint accuracy	1.0% trim resistors	±2.5%
Line regulation	Low line to high line	±0.2%
Load regulation	Full load to min. load	±0.5%
Min/Max load		0 A/6 A
Overshoot (at turn on)	5 V input model 12 V input model	3.0% max. 1.0% max.
Undershoot		100 mV max.
Ripple and noise	5 Hz to 20 MHz (See Note 2)	See table on page 2
Transient response (See Note 1)	Deviation	75 mV; 150 μs recovery to within regulation band

All specifications are typical at nominal input, full load at 25°C unless otherwise stated.

General Specifications

Efficiency		See Table below
Switching frequency	Fixed	200 kHz
Approvals and standards	(See Note 4)	TÜV Product Services EN60950, UL/cUL60950
Material flammability		UL94V-0
Weight		9.3 g (0.3 oz)
Coplanarity		150 μ m
MTBF	Telcordia SR-332	7,562,142 hours

Environmental Specifications

Thermal performance	Operating ambient temperature	-0 °C to +80 °C
(See Note 9)	Non-operating temperature	-40 °C to +125 °C
Protection		
Short-circuit	Hiccup, non latching	
Recommended System Capacitance		
Input capacitance	(See Note 10)	270 μF / 20 mW ESR max.
Output capacitance	(See Note 10)	680 μF / 10 mW ESR max.

Ordering Information

Model Number ^(3,5)	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical)	Regulation	
							Line	Load
SMT06C-05SADJJ	20 W	4.5 - 5.5 Vdc	0.9 - 3.3 V	0 A	6 A	89%	±0.2%	±0.5%
SMT06C-12SADJJ	30 W	10.2 - 13.8 Vdc	0.9 - 5.0 V	0 A	6 A	91%	±0.2%	±0.5%

Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Number of Outputs	Packaging Options
SMT	06	C	12	SADJ	J
SMT = Surface Mount	06 = 06 Amps	C = C Series	05 = 4.5 - 5.5 Vdc 12 = 10.2 - 13.8 Vdc	SADJ = Single Adjustable Output	J = Pb free (RoHS 6/6 compliant)

Output Voltage Adjustment

The ultra-wide output voltage trim range offers major advantages to users who select the SMT06C series. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.9 Vdc to 5.0 Vdc. When the SMT06C series converter leaves the factory the output has been adjusted to the default voltage of 0.9 V.


Ripple and Noise Specification

Model	Output Voltage	Pk - Pk	RMS
5 V input models	0.9 - 2.5 Vdc 3.3 Vdc	30 mV 40 mV	15 mV 15 mV
12 V input models	0.9 - 2.5 Vdc 3.3 Vdc	40 mV 50 mV	20 mV 20 mV

Notes:

1. $di/dt = 10 \text{ A}/\mu\text{s}$, $V_{in} = \text{Nom}$, $T_c = 25^\circ\text{C}$, load change = 0.5 I_o max. to 0.75 I_o max. and 0.75 I_o max to 0.5 I_o max.
2. Measured with external filter. See Application Note 169 for details.
3. Power up is the time from application of dc input to Power Good high. Remote ON/OFF asserted high to Power Good high.
4. This product is only for inclusion by professional installers within other equipment and must not be operated as a stand-alone product.
5. The standard unit with the suffix '-V' is for vertical mounting. To order a unit with horizontal mounting, please add the suffix '-H' to the model number, e.g. SIL06C-05SADJ-HJ.6. Airflow dependent, 300 LFM minimum required.
6. Measured as per recommended set-up. $C_{in} = 270 \mu\text{F}$ (20 mW ESR max.). $C_{out} = 680 \mu\text{F}$ (10 mW ESR max.).
7. Signal line assumed <3 m.
8. External input fusing recommended.
9. See Application Note 169 for operation above 50 °C.
10. See Application Note 160 for more details.
11. NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/power> to find a suitable alternative.

Mechanical Drawings

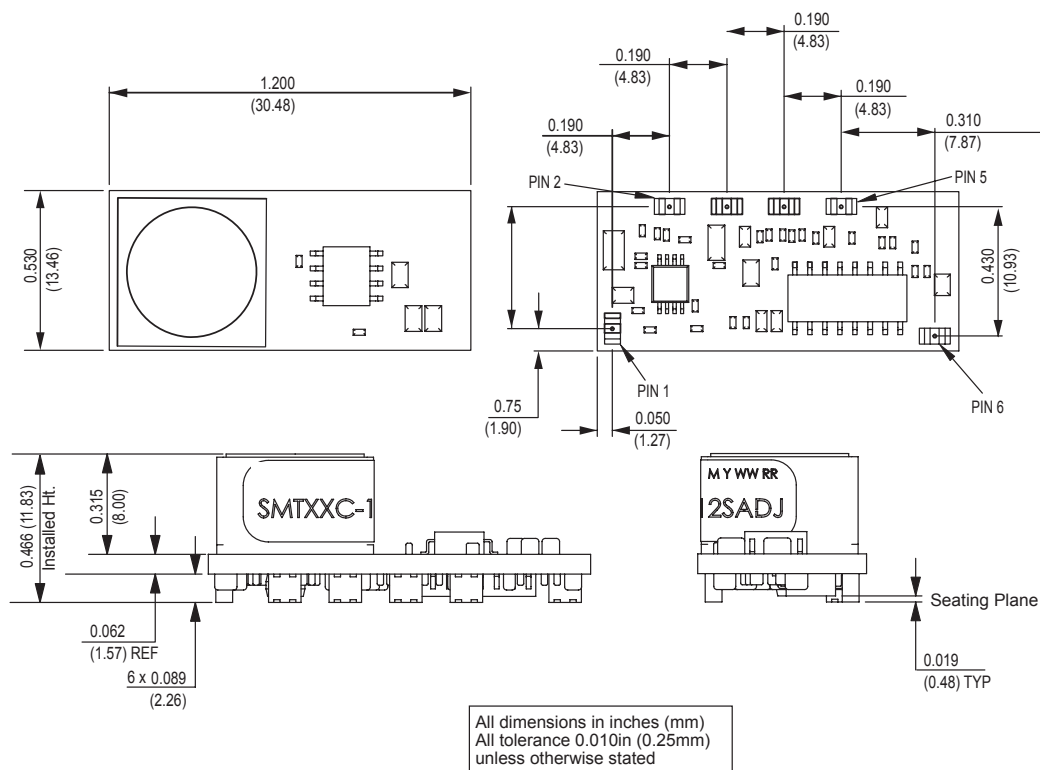

Pin Assignments

Pin	Function
1	Remote ON/OFF
2	Power Good
3	Trim
4	Vout
5	Ground
6	Vin

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com