


# MRC-170

## Technical Datasheet

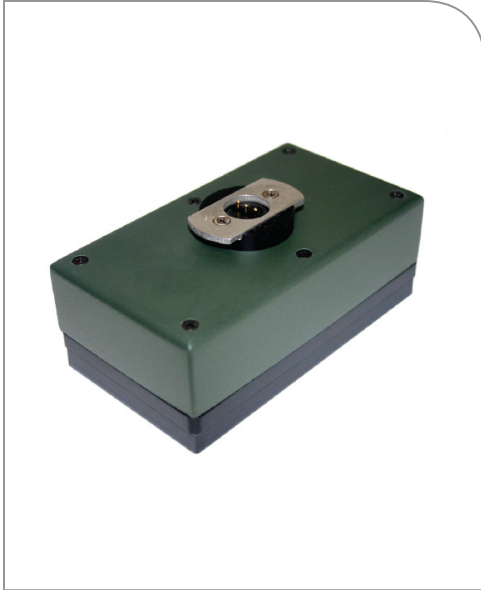

Technical Specifications	
Part No.	MRC-170
Operating Temperature	0°C to 45°C
Storage Temperature	-50°C to 65°C
Operating Altitude	27,000 ft.
Storage Altitude	55,000 ft.
Humidity	95% relative
Export License	ECCN 3A611.x export license required to export from U.S.
Harmonized Tariff Schedule	8504.40.9550

### Features

- The MRC-170 is a single battery charger adapter for the AN/PRC-152A handheld radio. It provides safe charging/discharging of the lithium-ion rechargeable batteries 12041-2100-XX, 12041-2200-XX and 12041-2400-XX

### Applications

- The adapter works with:
  - CH0003 or MRC-86A: 6-Bay Charger
  - CH0004 or MRC-85A: 2-Bay Charger
  - MRC-143A: 3-bay Charger
  - MRC-135A: DC/Solar Charger