
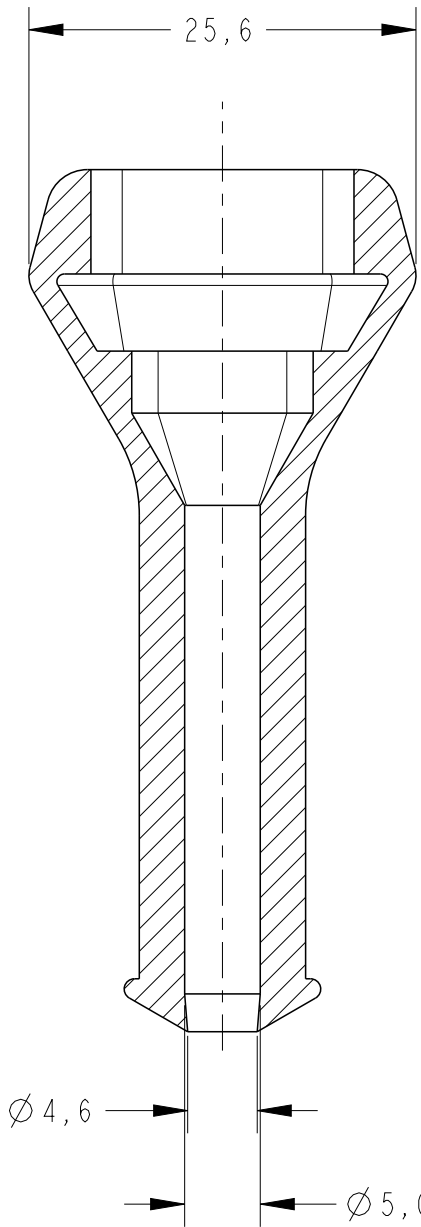


LOC	DIST	REVISIONS					
AP	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
 ProENGINEER WILDFIRE 4.0 DO NOT REVISE EXCEPT BY CAD			DI	OBSOLETE DASH I ECO-13-006169	09APR2013	NCL	DAO
			E	REVISED DESIGN EC-13-006187	24JUL2013	NCL	DAO

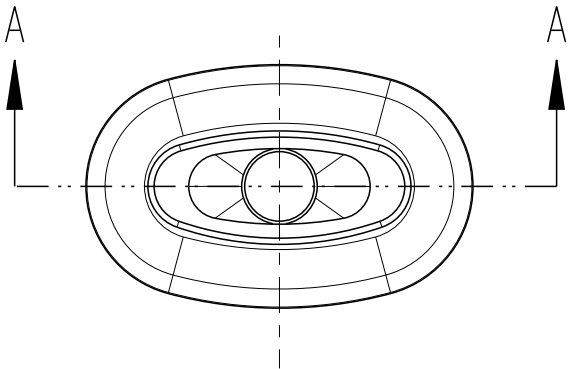

SECTION A - A

- 1

- ELASTÔMERO SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- 2

- ELASTÔMERO SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- 3

- ELASTOMERO SAE J 200M, 2GE, 405, A19, B37, EA14, E016, E036, F19, G11, Z1 Z1 = EXTERNAMENTE LUBRIFICADO 2%


- 1

- ELASTOMER SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- 2

- ELASTOMER SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- 3

- ELASTOMER SAE J 200M, 2GE, 405, A19, B37, EA14, E016, E036, F19, G11, Z1 Z1 = 2% LUBRIFICATED EXTERNALY

OBSOLETE	PRETO/BLACK	40±5 SHORE A	SILICON 3	880811-3
	PRETO/BLACK	40±5 SHORE A	ELASTOMER 1	880811-2
	PRETO/BLACK	50±5 SHORE A	ELASTOMER 2	880811-1
	FINISH	HARDNESS	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.L. OGAWA 10JUN99	 TE Connectivity				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK P.L. FARIA 10JUN99					
		APVD J.M.M. NETO 10JUN99					
		PRODUCT SPEC -	NAME - COVER CAP 3 POSN -				
MATERIAL SEE TABLE		APPLICATION SPEC -					
FINISH SEE TABLE		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-880811	RESTRICTED TO -	
CUSTOMER DRAWING					SCALE 2:1	SHEET 1 OF 1	REV E