


WFD79C0925FG

For Short-range Wireless

■ Features

- SAW filter for Smart Meter.
- Ultra compact. (1.4×1.1mm)

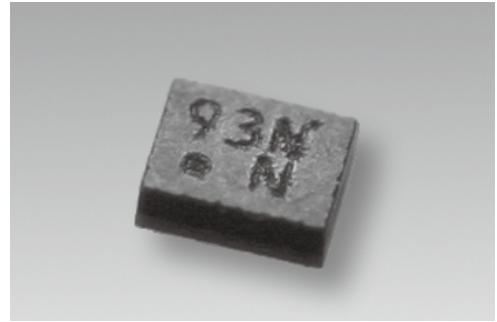


Pb Free

RoHS Compliant
Directive 2011/65/EU

■ Specifications

Model	WFD79C0925FG		
Item	min.	typ.	max.
Nominal Frequency (MHz)	-	925.8	-
Maximum Insertion Attenuation (dB) (923.5 to 928.1MHz)	-	2.1	3.0
Pass Band Ripple (923.5 to 928.1MHz)	-	0.4	1.8
Guaranteed Attenuation (dB)	815MHz to 845MHz	40	55
	860MHz to 890MHz	40	50
	900MHz to 915MHz	15	25
	945MHz to 960MHz	15	30
Operating Temperature Range (°C)	-25 to +75		
Terminating Impedance (Ω)	50		

■ Dimensions

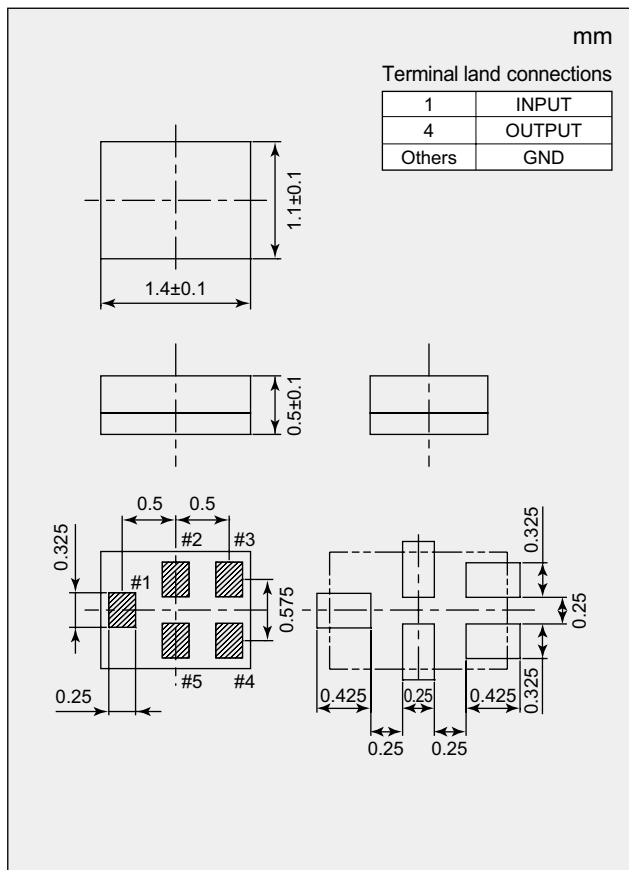

■ Characteristics

