Elektronische Bauelemente

STESD03C-C

70W, 3.3V

Low Capacitance ESD Protection (Bi-directional)

RoHS Compliant Product

A suffix of "-C" specifies halogen and lead-free

DESCRIPTION


The STESD03C-C is designed to protect voltage sensitive electronic components from ESD and other transients.

Excellent clamping capability, low leakage, low capacitance and fast response time provide best in class protection on designs that are exposed to ESD.


The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces.

It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

WBFBP-02C

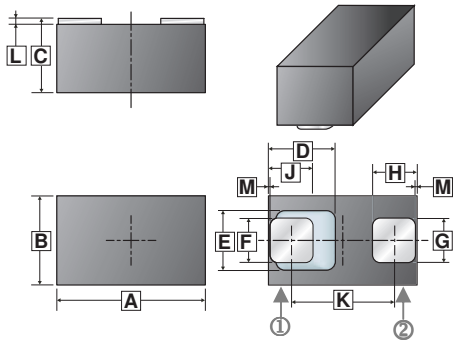

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.95	1.05	G	0.25	0.35
B	0.55	0.65	H	0.25	0.35
C	0.44	0.55	J	0.275	0.47
D	0.470 REF.		K	0.555	0.725
E	0.420 REF.		L	0.010	0.100
F	0.27	0.37	M	0.030 REF.	



Bi-direction

FEATURES

- Bi-Directional ESD Protection of One Lines
- Low Capacitance: 15pF(Max)
- Reverse Stand−off Voltage: 3.3V
- Low Reverse Clamping Voltage
- Low Leakage Current
- Fast Response Time
- JESD22-A114-B ESD Rating of Class 3B per Human Body Model
- IEC 61000-4-2 Level 4 ESD Protection

APPLICATIONS

- Computers and Peripherals
- High Speed Data Lines
- Audio and Video Equipment
- Cellular Handsets and Accessories
- Subscriber Identity Module(SIM) Card Protection

MARKING



PACKAGE INFORMATION

Package	MPQ	Leader Size
WBFBP-02C	10K	7 inch

ORDER INFORMATION

Part Number	Type
STESD03C-C	Lead (Pb)-free and Halogen-free

ABSOLUTE MAXIMUM RATINGS (T_A=25℃ unless otherwise specified)

Parameter		Symbol	Ratings	Unit
IEC 61000-4-2 ESD Voltage	Air Model	V_{ESD} [1]	±25	KV
	Contact Model		±25	
JESD22-A114-B ESD Voltage	Per Human Body Model		±16	
ESD Voltage	Machine Model		±0.4	
Peak Pulse Power [2]		P_{PP}	70	W
Peak Pulse Current [2]		I_{PP}	7	A
Lead Solder Temperature-Maximum(10Sec. Duration)		T_L	260	℃
Operating and Storage Temperature Range		T_J ,T_{STG}	150, -55~150	℃

Elektronische Bauelemente

STESD03C-C


70W, 3.3V

Low Capacitance ESD Protection (Bi-directional)


ESD Standards Compliance

IEC61000-4-2 Standard			
Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard	
ESD Class	Human Body Discharge V
0	0 ~ 249
1A	250 ~ 499
1B	500 ~ 999
1C	1000 ~ 1999
2	2000 ~ 3999
3A	4000 ~ 7999
3B	8000 ~15999

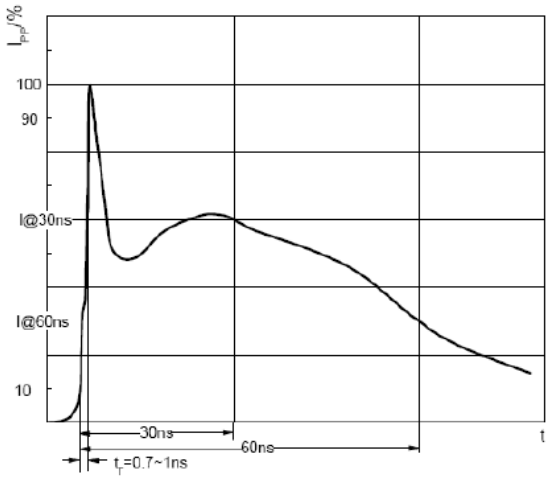


ESD pulse waveform according to IEC61000-4-2

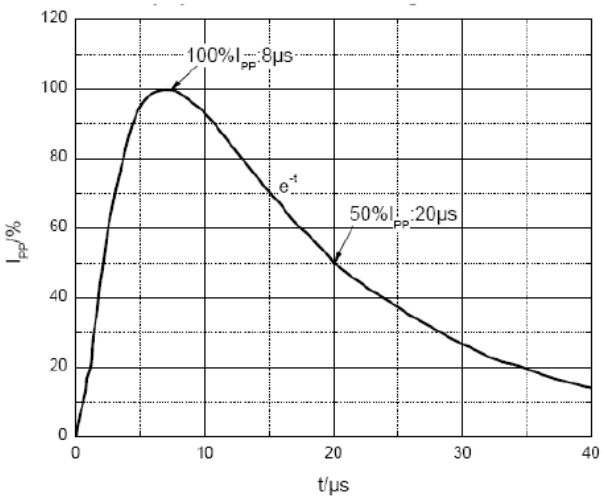

8/20μs pulse waveform according to IEC 61000-4-5

ELECTRICAL PARAMETER

Symbol	Parameter
V_C	Clamping Voltage @I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @I_T
I_T	Test Current
I_R	Reverse Leakage Current @V_{RWM}
V_{RWM}	Reverse Standoff Voltage

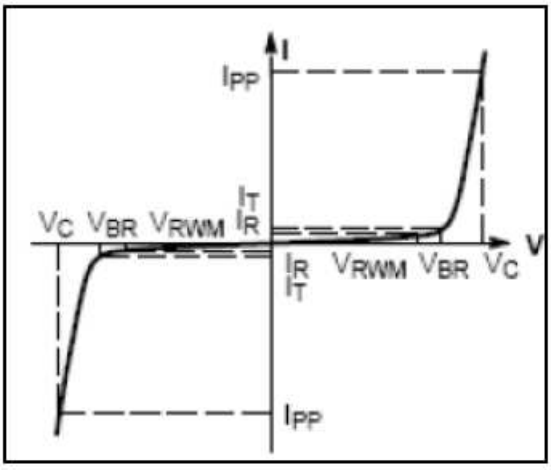

V-I characteristics for a Bi-directional TVS

Elektronische Bauelemente

STESD03C-C

70W, 3.3V

Low Capacitance ESD Protection (Bi-directional)

ELECTRICAL CHARACTERISTICS (T_A=25℃ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Working Voltage [3]	V_{RWM}	-	-	3.3	V	
Reverse Breakdown Voltage	V_{BR}	4	-	6	V	I_T=1mA
Reverse Leakage Current	I_R	-	-	0.4	μA	V_{RWM}=3.3V
Clamping Voltage [2]	V_C	-	-	10	V	I_{PP}=7A
Junction Capacitance	C_J	-	-	15	pF	V_R=0, f=1MHz

Notes :

1. Device stressed with ten non-repetitive ESD pulses.
2. Non-repetitive current pulse 8/20μs exponential decay waveform according to IEC61000-4-5.
3. Other voltages available upon request.

RATINGS AND CHARACTERISTICS CURVES

